


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions		Approved	Date
		Description/Approved/Date		M.H.	6/20/99
		1. Length, crimp stem dia. / 7-21-01 / M.H.		Checked M.H.	Date 6/20/99
				Drawn K.R.E.	Date 6/19/99
		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750		5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike

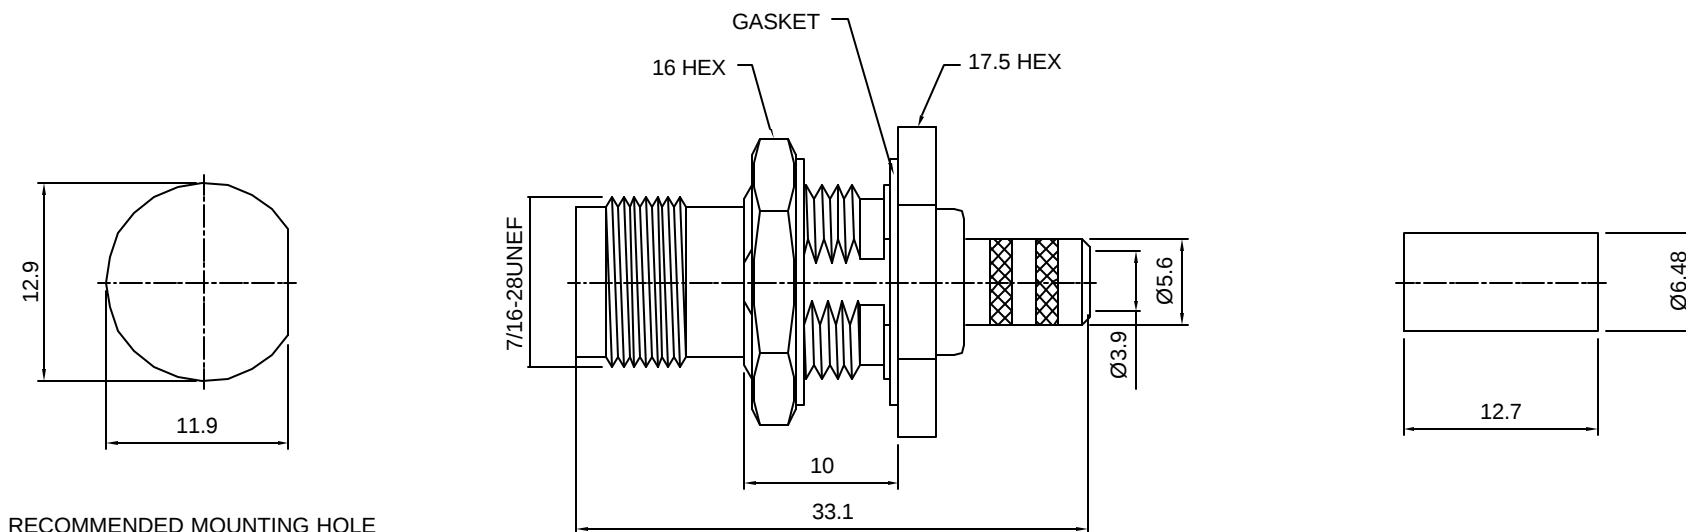

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-7TSF13RLNT-59		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11			
Insulation	Teflon, Note 5	None			
Ferrule	Annealed Copper, Note 7	Same as body			
Gasket	Silicone Rubber, Note 6	None			
Hex Nut	Brass, Note 1	Same as body			
Lock Washer	Brass, Note 1	Same as body			
			Description		
			TNC bulkhead crimp jack for 75 ohm RG-59 cable, long version.		
			(6.5 max panel width) Nickel plated brass body, teflon dielectric.		
			Scale	Drawing No.	File Name
			2:1	TNC/7TSF13L-59	7TSF13L-59