


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

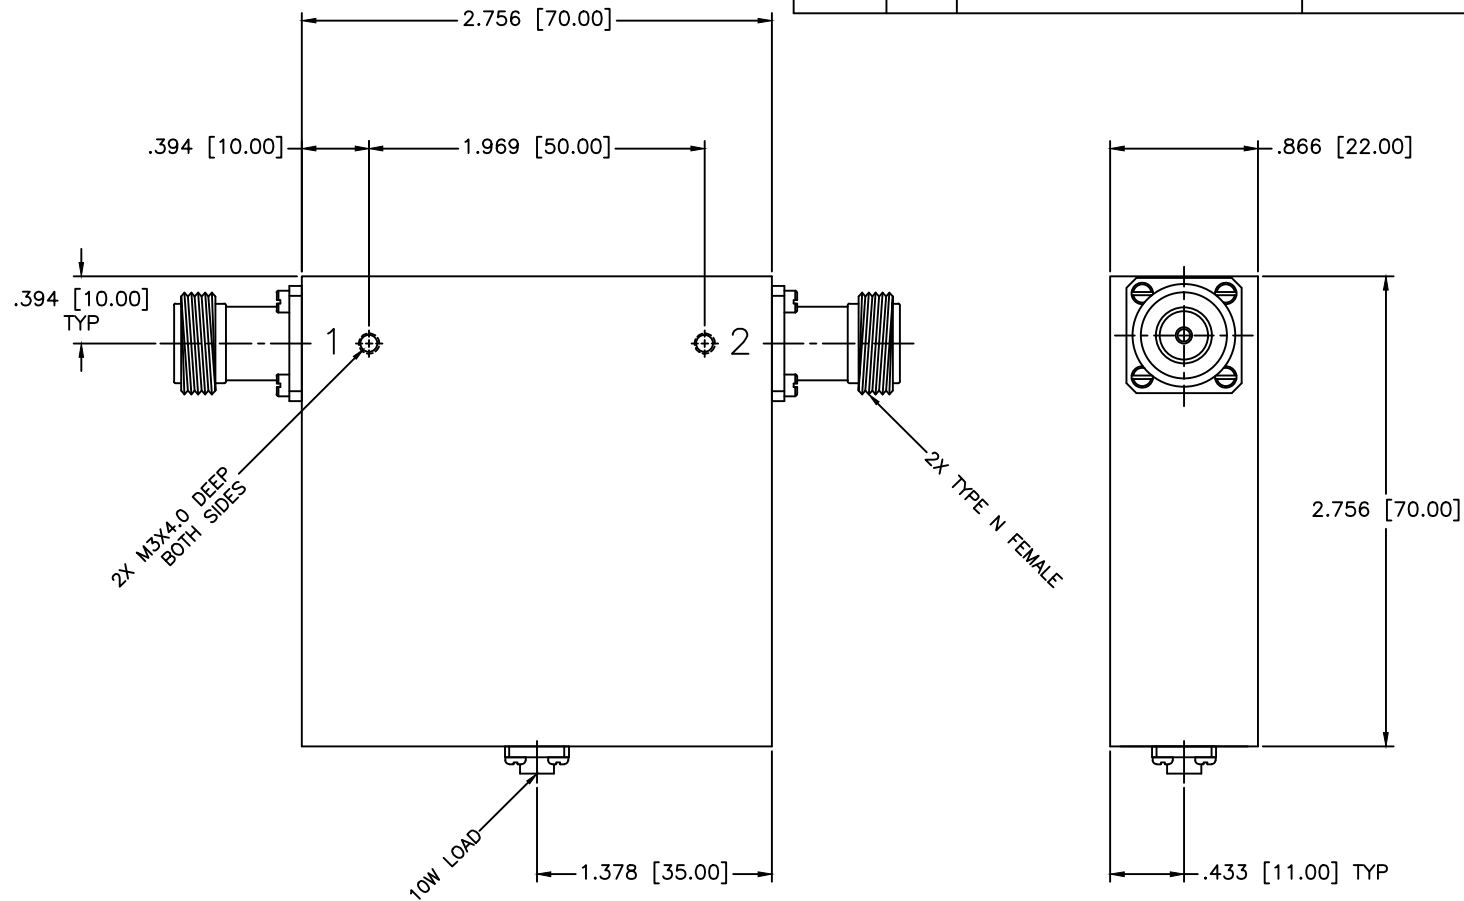

SPECIFICATIONS

Frequency Range: 0.9–1.7 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.60dB Max.
 VSWR: 1.35:1 Max.
 Operating Temperature: –10°C to +85°C

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.02 \pm 0.09$ ANGLE: $\pm 1/2^\circ$		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 11-21-2013		DRAWING TITLE: COAXIAL ISOLATOR	
APPROVED: T. Nguyen		DATE: 11-21-2013		PART NO. IS-1/NF	
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5		SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 86421	