


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

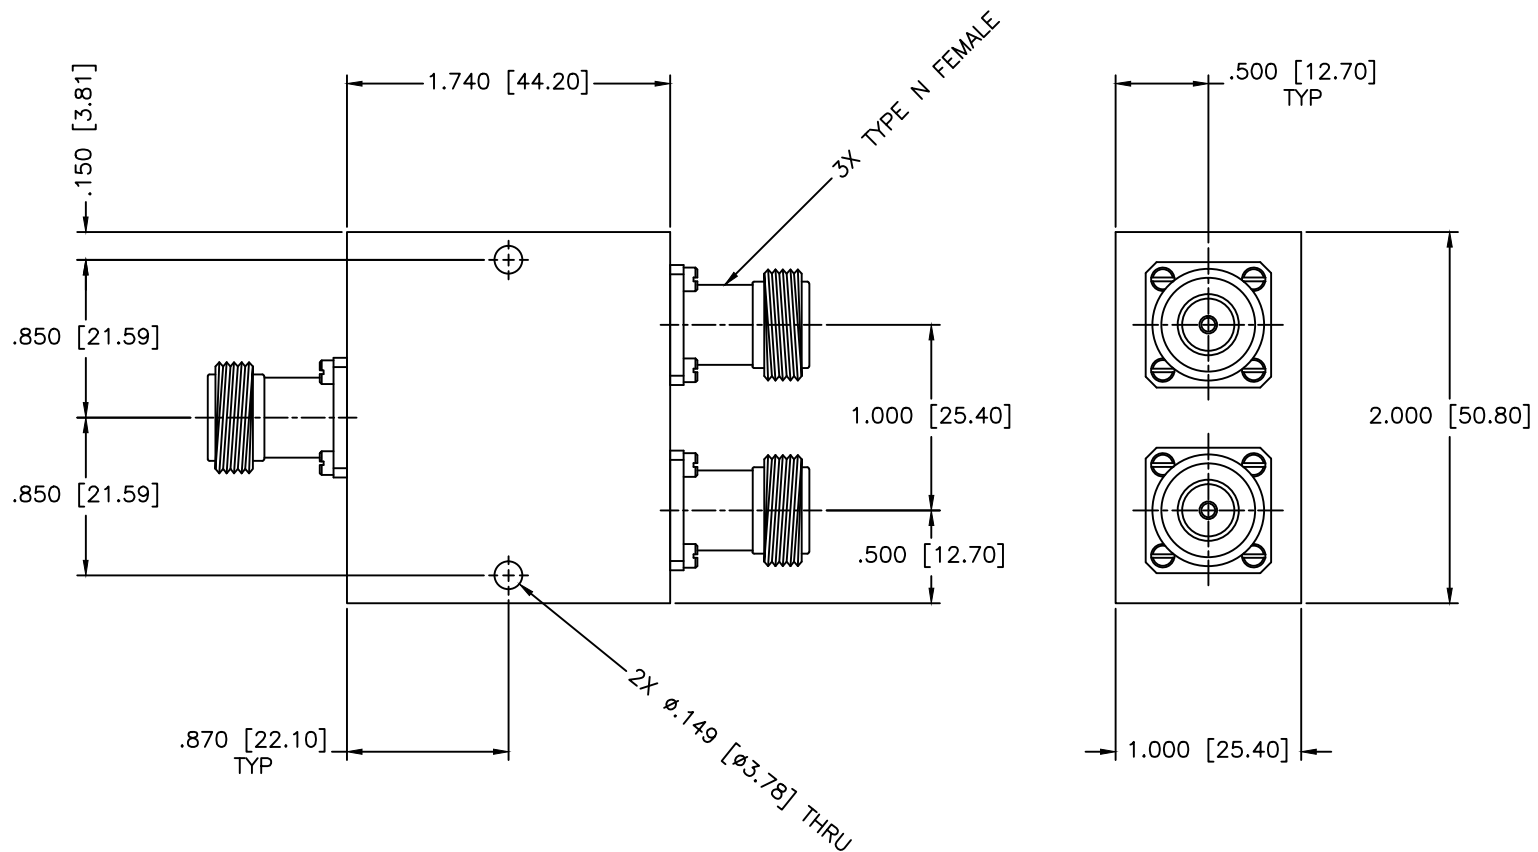

SPECIFICATIONS

Frequency Range: 0.70–1.50 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 17dB Min.
 VSWR In/Out: 1.40:1/1.30:1 Max.
 Phase Balance: ± 6 Deg. Max.
 Amplitude Balance: ± 0.3 dB Max.
 Power: 30 Watts

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE: 2-WAY POWER DIVIDER		PART NO. PS2-43/NF		
DRAWN: Pailoon Luekhamhan	DATE: 06-28-1999	CAGE CODE: OD2L5		
APPROVED: T. Nguyen	DATE: 06-28-1999	SIZE: A	REV: N/A	DWG NO. 80899
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		