

1000 MHz < F_o < 1400 MHz

Band Pass

Slopes 17 MHz

Bandwidth 6 MHz


WBCTV5-__

Attenuation 60 dB


Specifications

Passband:	$(F_o) \pm 3 \text{ MHz} = \underline{\quad} \text{ to } \underline{\quad} \text{ MHz}$
Passband Insertion Loss:	1.5 dB max. at F_o (1.75 dB max. at corners)
Passband Return Loss:	14 dB min. (VSWR 1.5:1 max.)
Stopband:	DC to <u> </u> MHz and <u> </u> to <u> </u> MHz
Stopband Attenuation:	60 dB min.
Operating Temperature:	15 °C to 45 °C
Power Handling:	will be quoted (Please see our <u>warranty</u> in this regard)
Dimensions (L x W x H):	max. 305 x 60 x 96 mm (plus connectors and flanges)
Approx. Weight:	5 kg
Mounting Provision:	15 mm flanges on both ends with 4.5 mm holes
Connector 1:	- Please choose -
Connector 2:	- Please choose -

Typical Performance

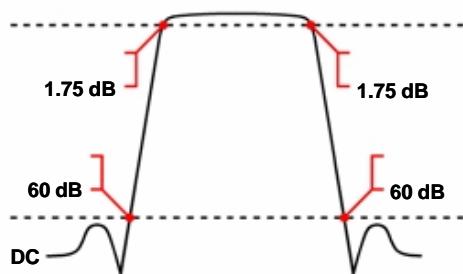

5 Section Cavity Design

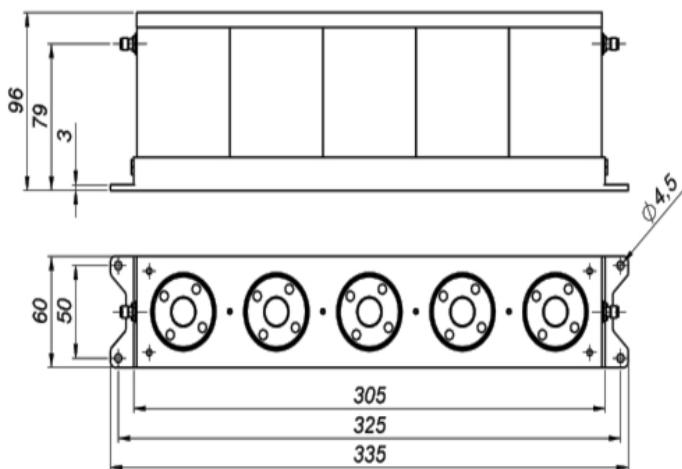

Connector Options

SMA Female
SMA Male
N Female
N Male
BNC Female
BNC Male
7/16 Female

©2013 Wainwright Instruments. All rights reserved.

Euro Prices

(USD Prices will be quoted for
US-based customers only)

1 - 4 pcs: €1017

5 - 9 pcs: €966

10 - 24 pcs: €918

Delivery Terms

FCA Andechs (free carrier) according to **Incoterms 2010**

In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2010** (unversichert).

Regarding payment terms and warranty see Terms and Conditions.

Delivery time: normally 3 to 4 weeks - depending on quantity ordered and on our work load.

Customer is responsible for observing all applicable export laws in regard to filter application and location of end user



Wainwright Instruments GmbH
www.wainwright-filters.com

Tel: +49 8152 918230
Fax: +49 8152 918255
info@wainwright-filters.com