


REV.	DATE	DESCRIPTION
NC	01/13/00	INITIAL RELEASE
A	10/18/06	UPDATE DRAWING FORMAT

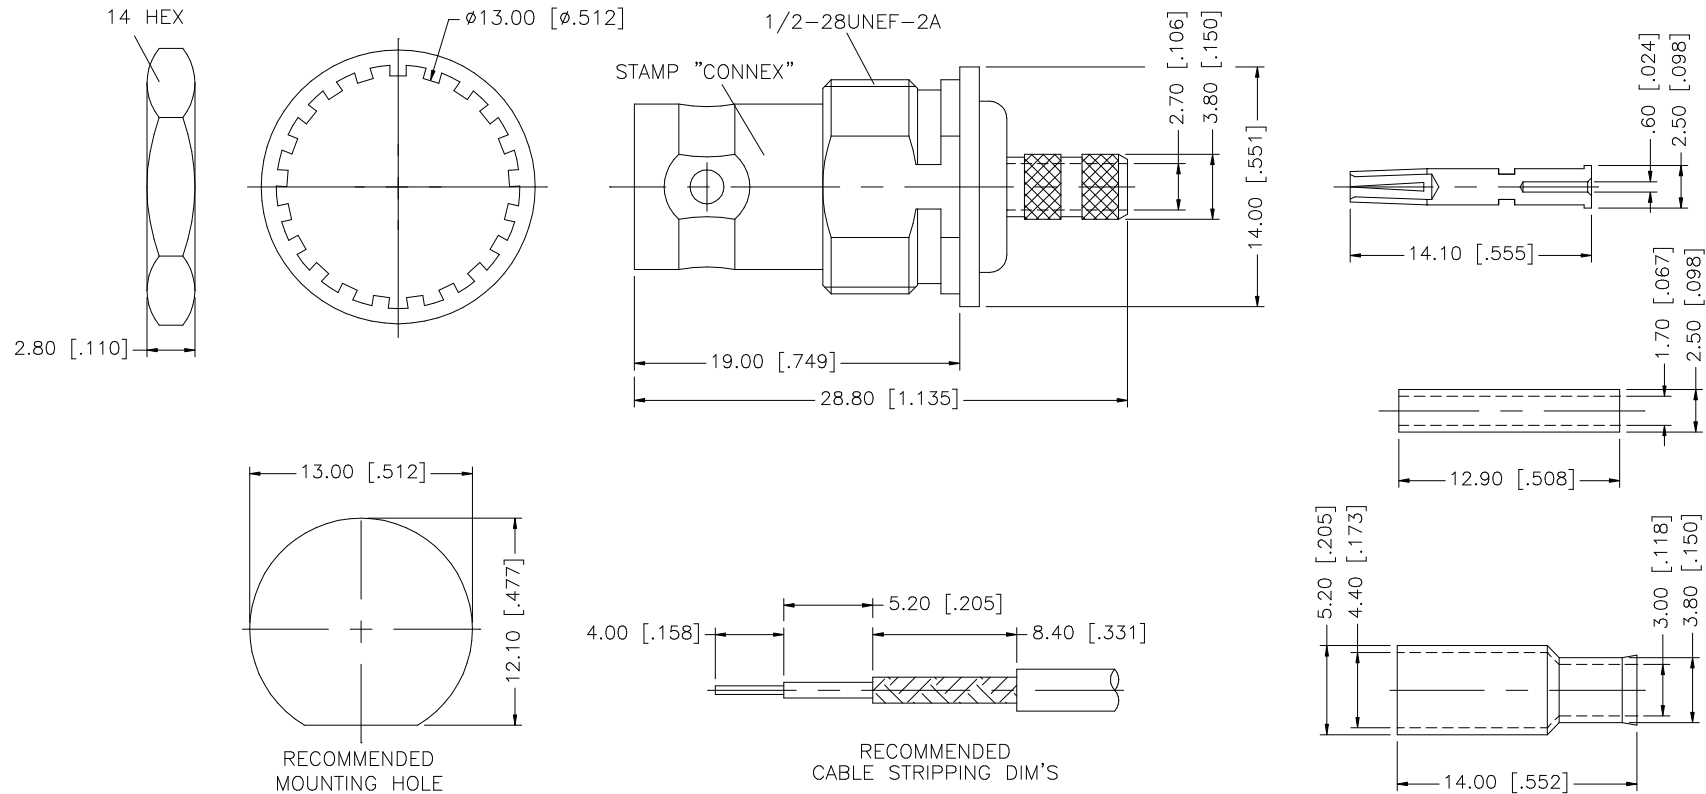

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.					10/18/06			
7	FERRULE	COPPER	NICKEL	1		CHECKED			PART DESCRIPTION BNC BULKHEAD CRIMP JACK – SMALL FLANGE (FOR RG–174/U, 188A/U, 316/U CABLE)						
6	HEX NUT	BRASS	NICKEL	1		ISSUED									
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 112234–11						
4	SLEEVE	DELTRIN	NATURAL	1	CAD FILE	C:/112/112234–11.DWG		DWG. NO.					112234–11.DWG	REV.	A
3	CONTACT PIN	PHOS. BRONZE	GOLD	1											
2	INSULATOR	DELTRIN	NATURAL	1											
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											