
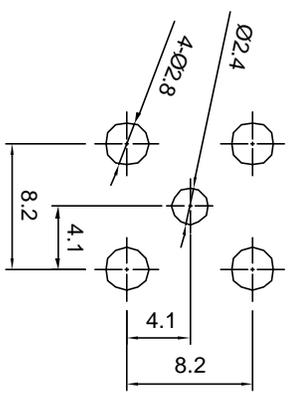
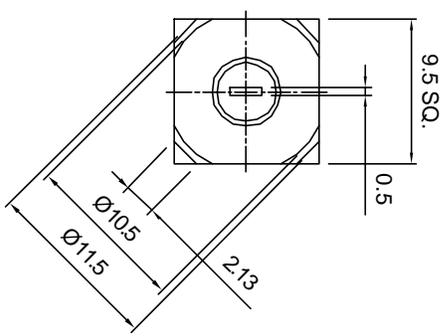


Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1	Revisions Description/Approved Date 	Approved	Date
		Checked	Date
Dimensions are in Millimeters NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750	Drawn	Date	
	T.J.A.	02/03/99	
	5. Per MIL-P-19468	9. Nickel pl. 100 min. over	
	6. Per ZZ-R-765	copper strike	
	7. Per WW-1-799	10. Per QQ-P-35	
	8. Gold pl. 5 min. over	11. Gold pl. 30 min. over	
	nickel pl. 50 min. over	nickel pl. 50 min. over	
	copper strike	copper strike	

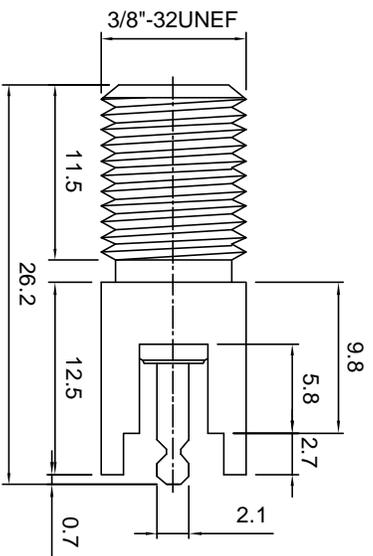

RECOMMENDED MOUNTING HOLE

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 9511 Ridgewayen Ct, Suite B San Diego, California 92123 Part Number: L7HFSF54LNP
Connector Body	Brass, Note 1	Nickel, Note 9	
Center Contact: Female	Brass, Note 1	Nickel, Note 9	
Insulation	Polypropylene	None	
Ferrule	--	--	
Gasket	--	--	
Hex Nut	--	--	
Lock Washer	--	--	
Description			
Scale			Nickel plated brass body, Polypropylene dielectric. 2:1
Drawing No.			FSF54LNP
File Name			FSF54L