



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1622 MHz Cavity Bandpass Filter

Part Number: AB1622B756



Electrical specifications

Center Frequency: 1622.375 MHz

Insertion loss (Fo): 1.30 dB max

Insertion loss (1619.25-1625.5): 3.7 dB max

VSWR: 1.5:1 typical

Rejection 1: 40 dB min@ 1000~1616.375 MHz

Rejection 2: 40 dB min@ 1628.375~2500 MHz

Mechanical

Mounting Method: Threaded Mounting Holes

Connector Type: TNC Female/ TNC Male

Dimensions: 6.69 X 5.20" X 1.50" in

Environmental


Operating Temperature: -45 to +85° C

Storage Temperature: -55 to +95° C

Shock: 20 G. 11ms

Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

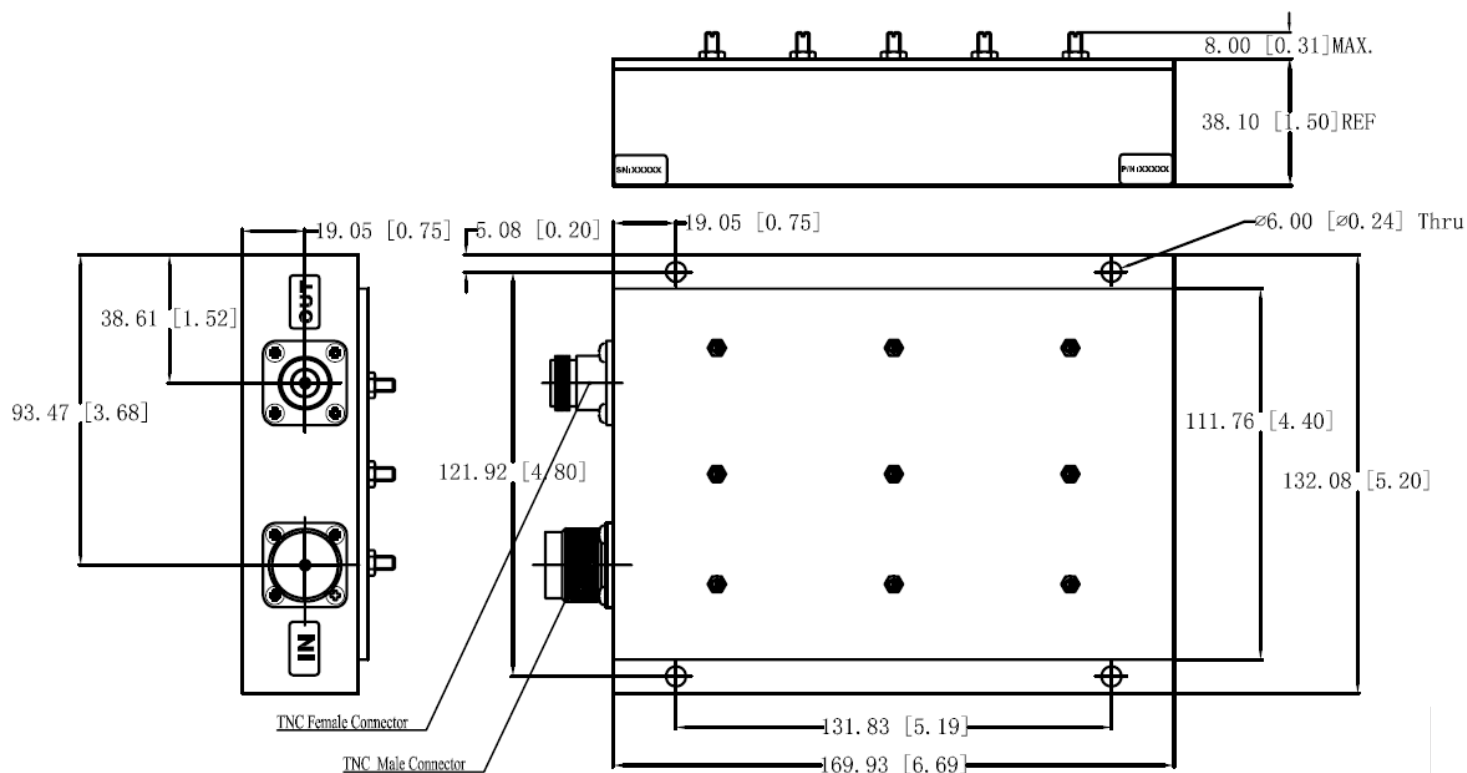



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1622 MHz Cavity Bandpass Filter

Part Number: AB1622B756



Plot:

