


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

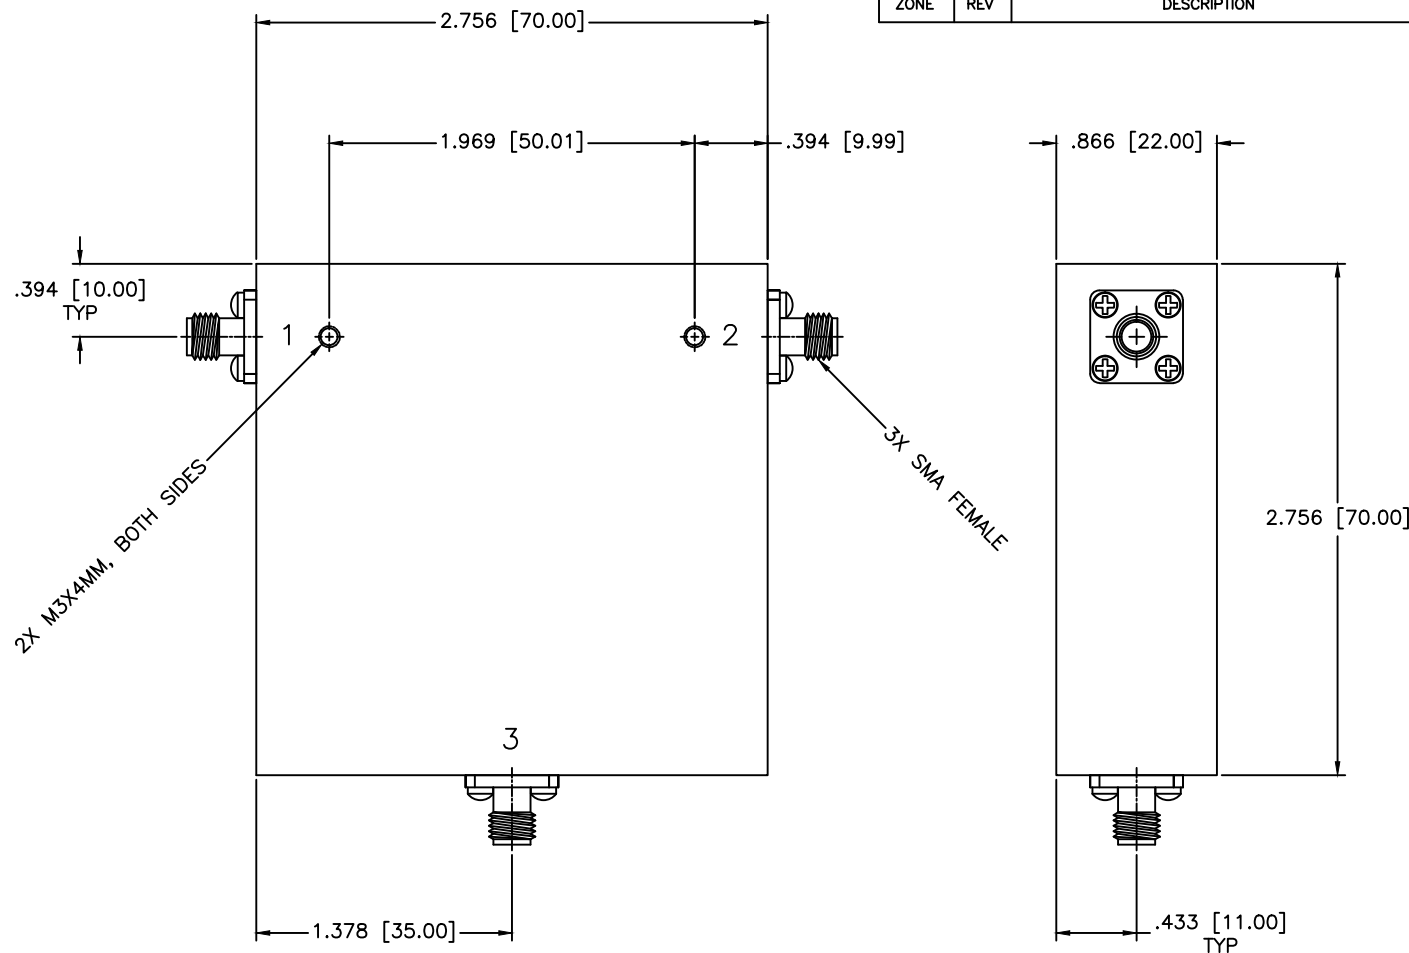

SPECIFICATIONS

Frequency Range: 0.98–2.05 GHz
Isolation: 17dB Min.
Insertion loss: 0.60dB Max.
VSWR: 1.35:1 Max.
Operating Temperature: 0°C to +55°C
Power: 50W Avg, 100W Peak.

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:

N/A

SHEET:

N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: $\pm 0.01 \pm 0.05$
ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:

CIRCULATOR

PART NO.

CS-2

DRAWN:

Paiboon Luekhamhan

DATE:

01-04-2005


APPROVED:

T. Nguyen

DATE:

01-04-2005

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



CAGE CODE:

OD2L5

SIZE:

N/A

REV:

N/A

DWG NO.

84867

DO NOT SCALE THE DRAWING