



RF-LAMBDA

The power beyond expectations

RBPF33Go4Go8

Suspended Substrate Stripline BAND PASS FILTER 4-8GHz

Summary:

- SSS Filter - Suspended Substrate Stripline Filter
- Flat frequency response and low insertion loss..
- Covers the 1 GHz to 18 GHz Frequency Range
- Wide bandwidth and 3 dB BW Available from 5-50% (f_0)
- Designs that Cover up to 40 GHz Also Available
- MIL-E-5400 standard




Pass Band (GHz)	1dB Pass Band(GHz)	VSWR	Stop Band (GHz)	Rejection (dB)	Connector	Power (W)
4-8	4.2-7.7	1.80	DC-3.4 9.2-12.0	45	SMA-F	15

Environmental Specifications:

Operational Temp. Range: -55°C~+85°C

Storage Temp. Range: -55°C~+100°C

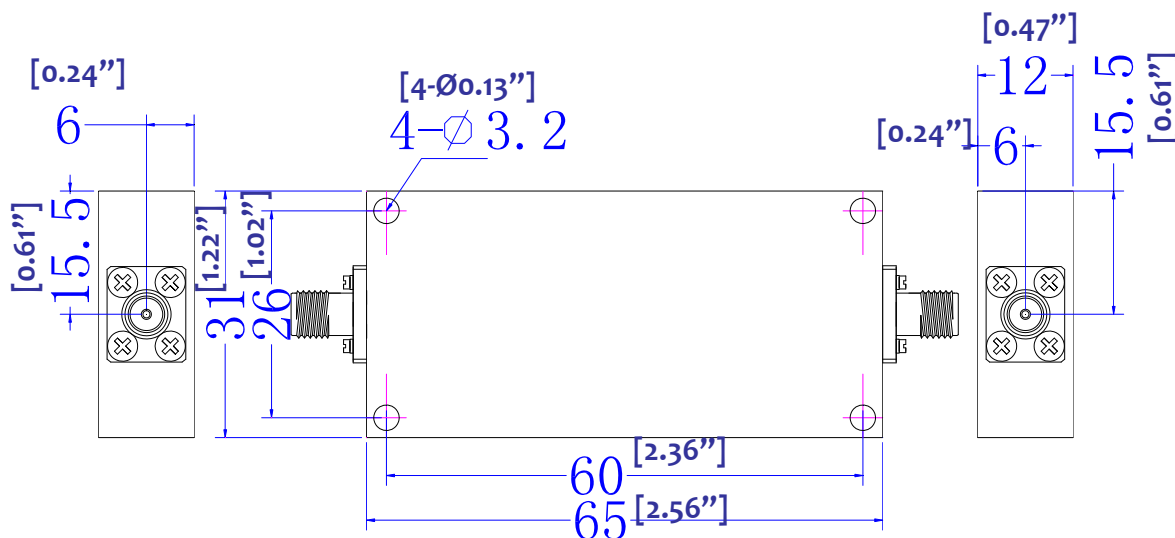


Band Pass Suspended Substrate Stripline Filter 4-8GHz



RF-LAMBDA

The power beyond expectations

RBPF33Go4Go8

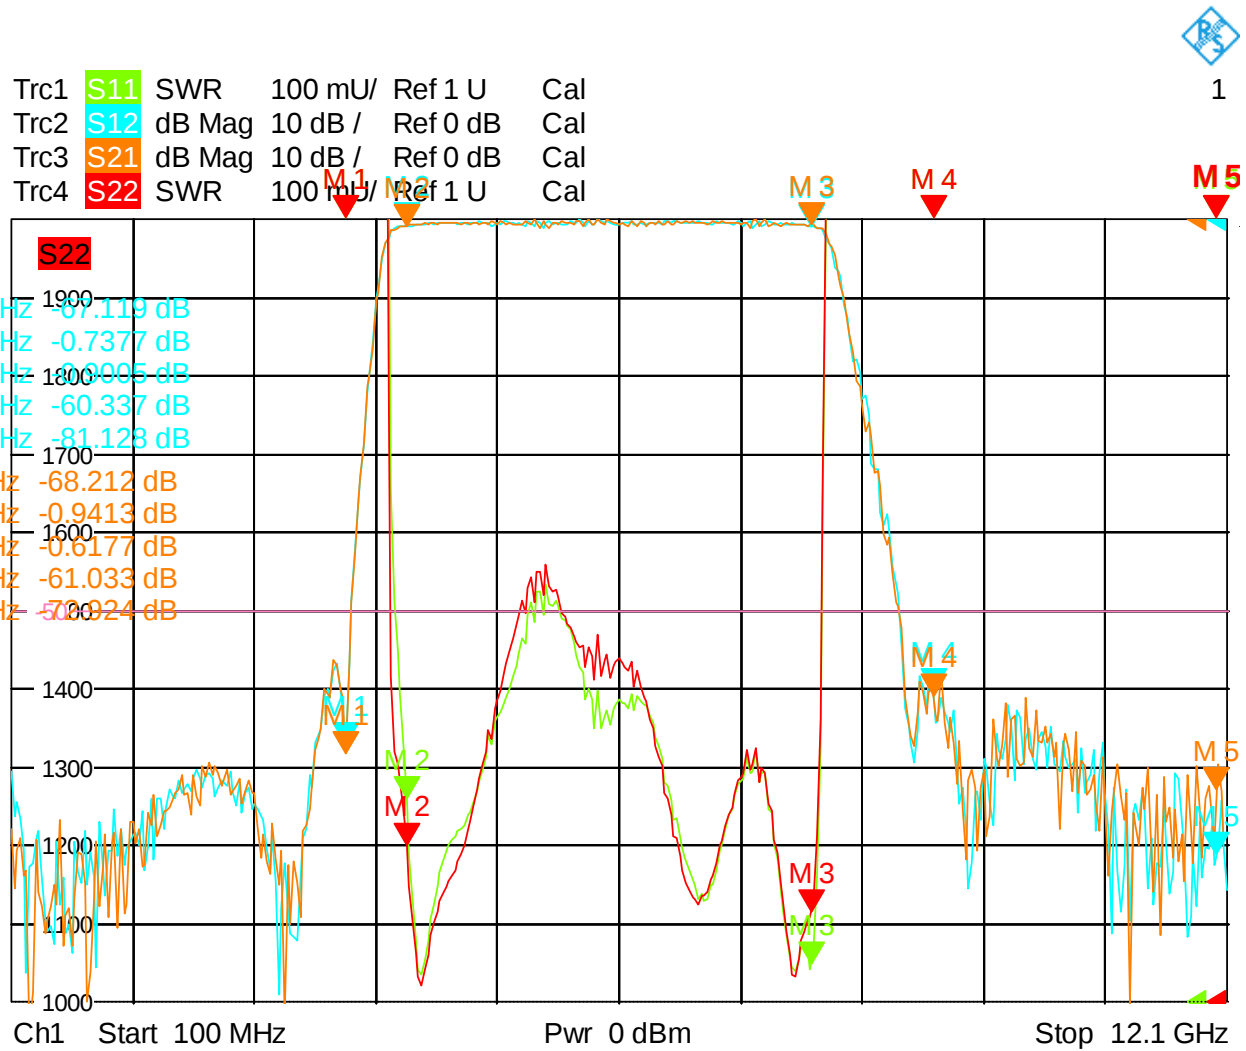

Band Pass Suspended Substrate Stripline Filter 4-8GHz