



SMA Male Connector Solder Attachment Thru Hole  
 PCB, .200 inch x .067 inch Hole Spacing

TECHNICAL DATA SHEET

PE4525

**Configuration**

Connector	SMA Male
Connector Specification	MIL-STD-348A
Connector Interface Type	Thru Hole
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight

**Electrical Specifications**

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum VSWR	1.3:1
Maximum Operating Voltage, Volts	500

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-65 to +165
------------------------	-------------

**Size**

Length, in [mm]	0.65 [16.51]
Width/Dia., in [mm]	0.315 [8.00]
Weight, lbs [g]	0.008 [3.63]

**Connector**

Type	SMA Male
Contact Material and Plating	Brass, Gold
Contact Plating Specification	30µ in. minimum
Coupling Nut Material and Plating	Brass, Gold
Coupling Nut Plating Specification	3µ in. minimum
Hex Size, in	5/16
Torque, in-lbs [Nm]	5 [0.57]
Body Material and Plating	Brass, Gold
Body Plating Specification	3µ in. minimum
Dielectric Type	Teflon

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
REACH Compliant	06/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing PE4525](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





SMA Male Connector Solder Attachment Thru Hole  
PCB, .200 inch x .067 inch Hole Spacing

TECHNICAL DATA SHEET

PE4525

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

SMA Male Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing PE4525](http://www.pasternack.com/sma-male-standard-thru-hole-pcb-connector-pe4525-p.aspx)

URL: <http://www.pasternack.com/sma-male-standard-thru-hole-pcb-connector-pe4525-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE4525 CAD Drawing

SMA Male Connector Solder Attachment Thru Hole  
PCB, .200 inch x .067 inch Hole Spacing

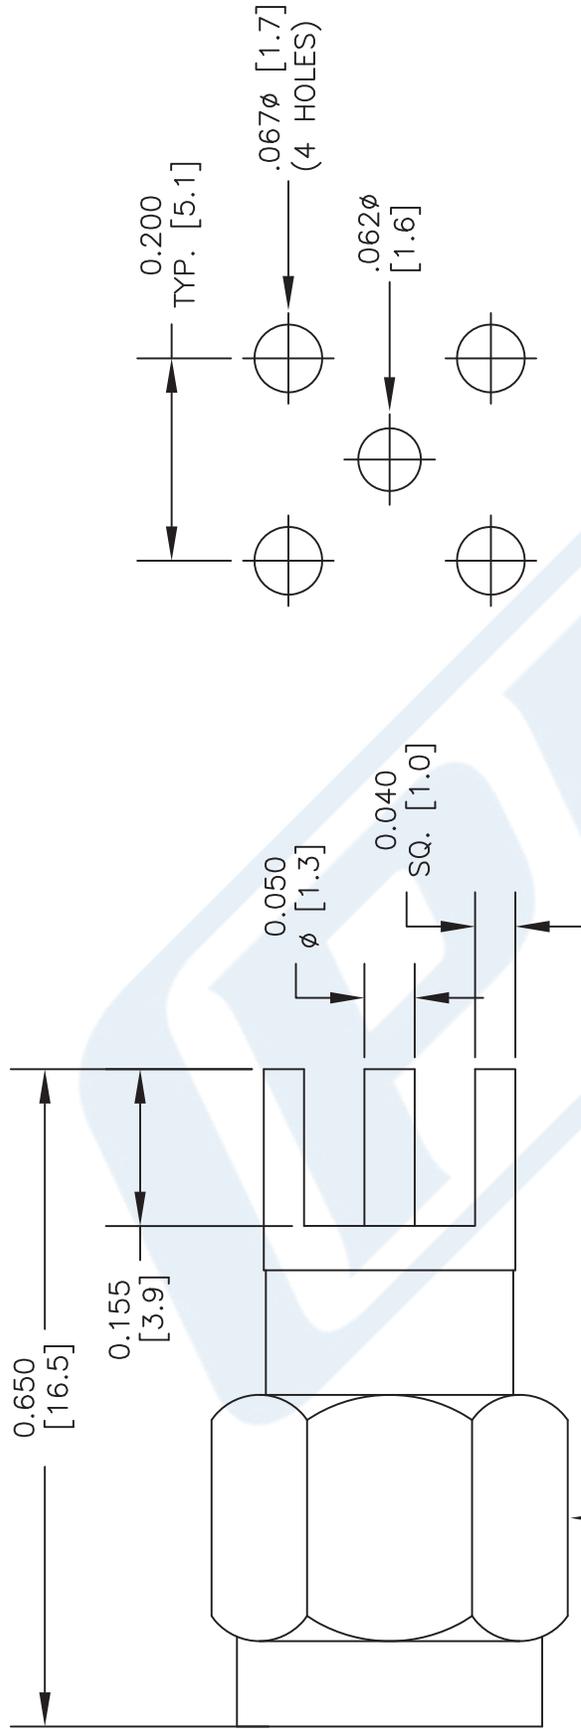

MOUNTING HOLES

DWG TITLE

**PE4525**

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 052102

SCALE N/A

SIZE A

2233



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com