


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

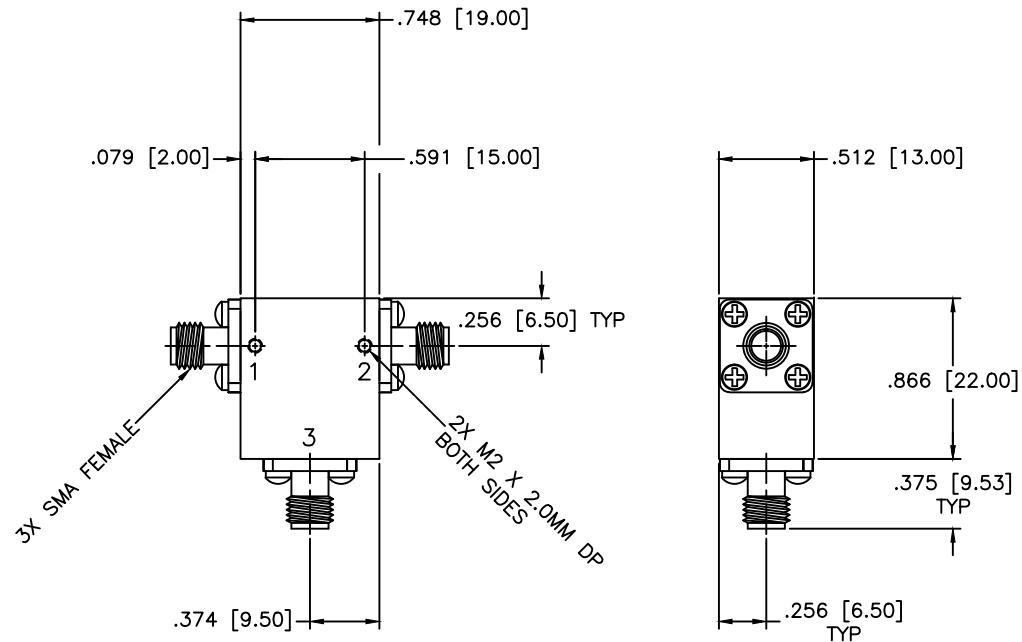

SPECIFICATIONS

Frequency Range: 6.5–13.0 GHz
Isolation: 17dB Min.
Insertion loss: 0.7dB Max.
VSWR: 1.35:1 Max.
Circulator Power: 25W Avg. 250W Peak
Operating Temperature: –54°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
DRAWN: Paiboon Luekhamhan DATE: 12-02-2013 APPROVED: T. Nguyen DATE: 12-02-2013		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$			
		DRAWING TITLE: COAXIAL CIRCULATOR PART NO.: CS-25			
		CAGE CODE:	SIZE:	REV:	DWG NO.
		OD2L5	N/A	A	84827
		DO NOT SCALE THE DRAWING			