

## 50 Ohm 2 Way SMA Resistive Power Divider From DC to 18 GHz Rated at 1 Watts

### TECHN

# **PE2084**

50 Ohm 2 Way SMA Resistive Power Divider From DC to 18 GHz Rated at 1 Watte	
Configuration	
Input Connector	SMA Female
Output Connectors	SMA Female
Frequency Range, GHz	DC to 18
Design	Resistive
Number of Output Ports	2
Housing Material and Plating	Passivated Stainless Steel
Electrical Specifications	
Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum Insertion Loss, dB	7.5
Maximum Input Power, Watts	1
Maximum Input VSWR	1.3:1
Phase Balance, Degrees	±3
Flatness, dB	0.5
Mechanical Specifications	
Temperature	
Operating Range, deg C	-65 to +125
Size	
Length, in [mm]	1.16 [29.46]
Width, in [mm]	1 [25.4]
Height, in [mm]	0.375 [9.53]
Input Connector	
Contact Material and Plating	Beryllium Copper, Gold
Connector Material and Plating	Passivated Stainless Steel
Body Material and Plating	Passivated Stainless Steel
Output Connectors	
Contact Material and Plating	Beryllium Copper, Gold
Connector Material and Plating	Passivated Stainless Steel
Body Material and Plating	Passivated Stainless Steel
Compliance Certifications (visit www.Pasterna	ack.com for current document)
RoHS Compliant	Yes
or	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm 2 Way SMA Resistive Power Divider From DC to 18 GHz Rated at 1 Watts PE2084

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451 Sales@Pasternack.com · Techsupport@Pasternack.com





0000

#### 50 Ohm 2 Way SMA Resistive Power Divider From DC to 18 GHz Rated at 1 Watts

## **TECHNICAL DATA SHEET**

## PE2084

Plotted and Other Data Notes:

Values at 25 °C, sea level

50 Ohm 2 Way SMA Resistive Power Divider From DC to 18 GHz Rated at 1 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm 2 Way SMA Resistive Power Divider From DC to 18 GHz Rated at 1 Watts PE2084

URL: http://www.pasternack.com/2-way-sma-power-divider-dc-18-ghz-1-watts-pe2084-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com



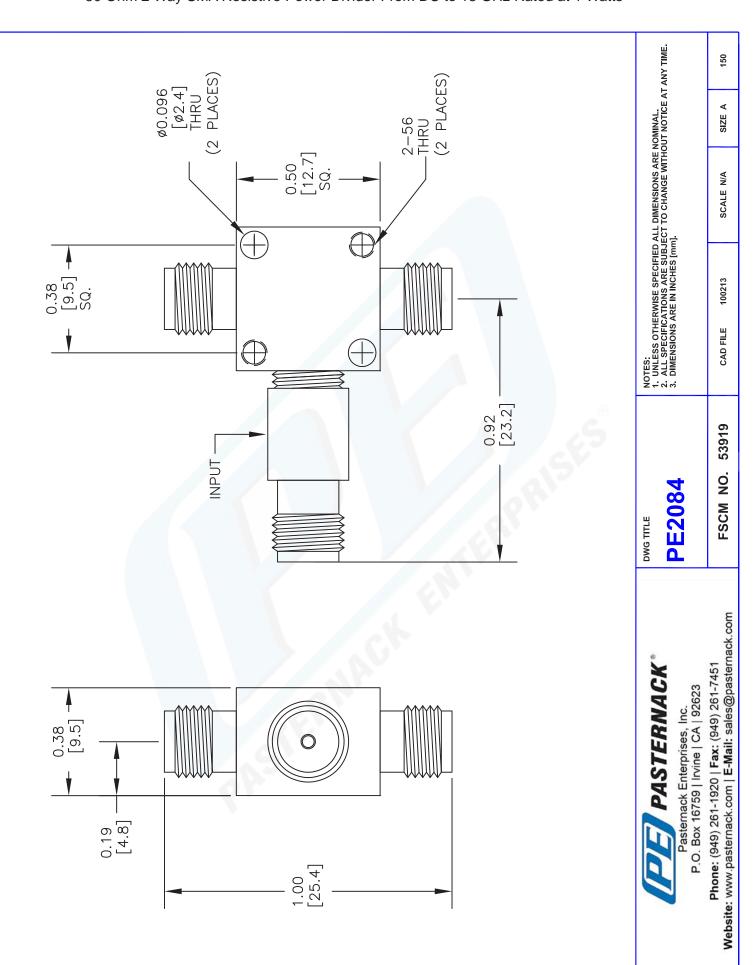

## **PE2084 CAD Drawing** 50 Ohm 2 Way SMA Resistive Power Divider From DC to 18 GHz Rated at 1 Watts

© 2013 Pasternack Enterprises All Rights Reserved