



Mini SMP Male Connector Solder Attachment End Launch PCB

TECHNICAL DATA SHEET

PE44490

Mini SMP Male Connector Solder Attachment End Launch PCB

Configuration

Connector	Mini SMP Male
Connector Specification	MIL-STD-348A
Connector Interface Type	End Launch
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight

Electrical Specifications

Frequency Range, GHz	DC to 65
Impedance, Ohms	50
Maximum Operating Voltage, Volts	325

Frequency 1

Frequency, GHz	DC to 6
VSWR	1.11:1
Return Loss, dB	26
Insertion Loss, dB	0.24

Frequency 2

Frequency, GHz	6 to 18
VSWR	1.25:1
Return Loss, dB	19
Insertion Loss, dB	0.42

Frequency 3

Frequency, GHz	18 to 26.5
VSWR	1.5:1
Return Loss, dB	14
Insertion Loss, dB	0.51

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +155
------------------------	-------------

Size

Length, in [mm]	0.27 [6.86]
Width/Dia., in [mm]	0.16 [4.06]
Weight, lbs [g]	0.006 [2.72]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Mini SMP Male Connector Solder Attachment End Launch PCB PE44490](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





Mini SMP Male Connector Solder Attachment End Launch PCB

TECHNICAL DATA SHEET

PE44490

Connector

Type	Mini SMP Male
Mating Cycles	100
Contact Material and Plating	Beryllium Copper, Gold
Maximum Engagement Force	19 N
Maximum Disengagement Force	29 N
Body Material and Plating	Brass, Gold
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
REACH Compliant	12/19/2011

Plotted and Other Data

Notes:	Values at 25 °C, sea level Max Soldering Temp: +260°C for 10 Sec
--------	---

Mini SMP Male Connector Solder Attachment End Launch PCB from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Mini SMP Male Connector Solder Attachment End Launch PCB PE44490](http://www.pasternack.com/mini-smp-male-standard-surface-mount-end-launch-connector-pe44490-p.aspx)

URL: <http://www.pasternack.com/mini-smp-male-standard-surface-mount-end-launch-connector-pe44490-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44490 CAD Drawing

Mini SMP Male Connector Solder Attachment End Launch PCB

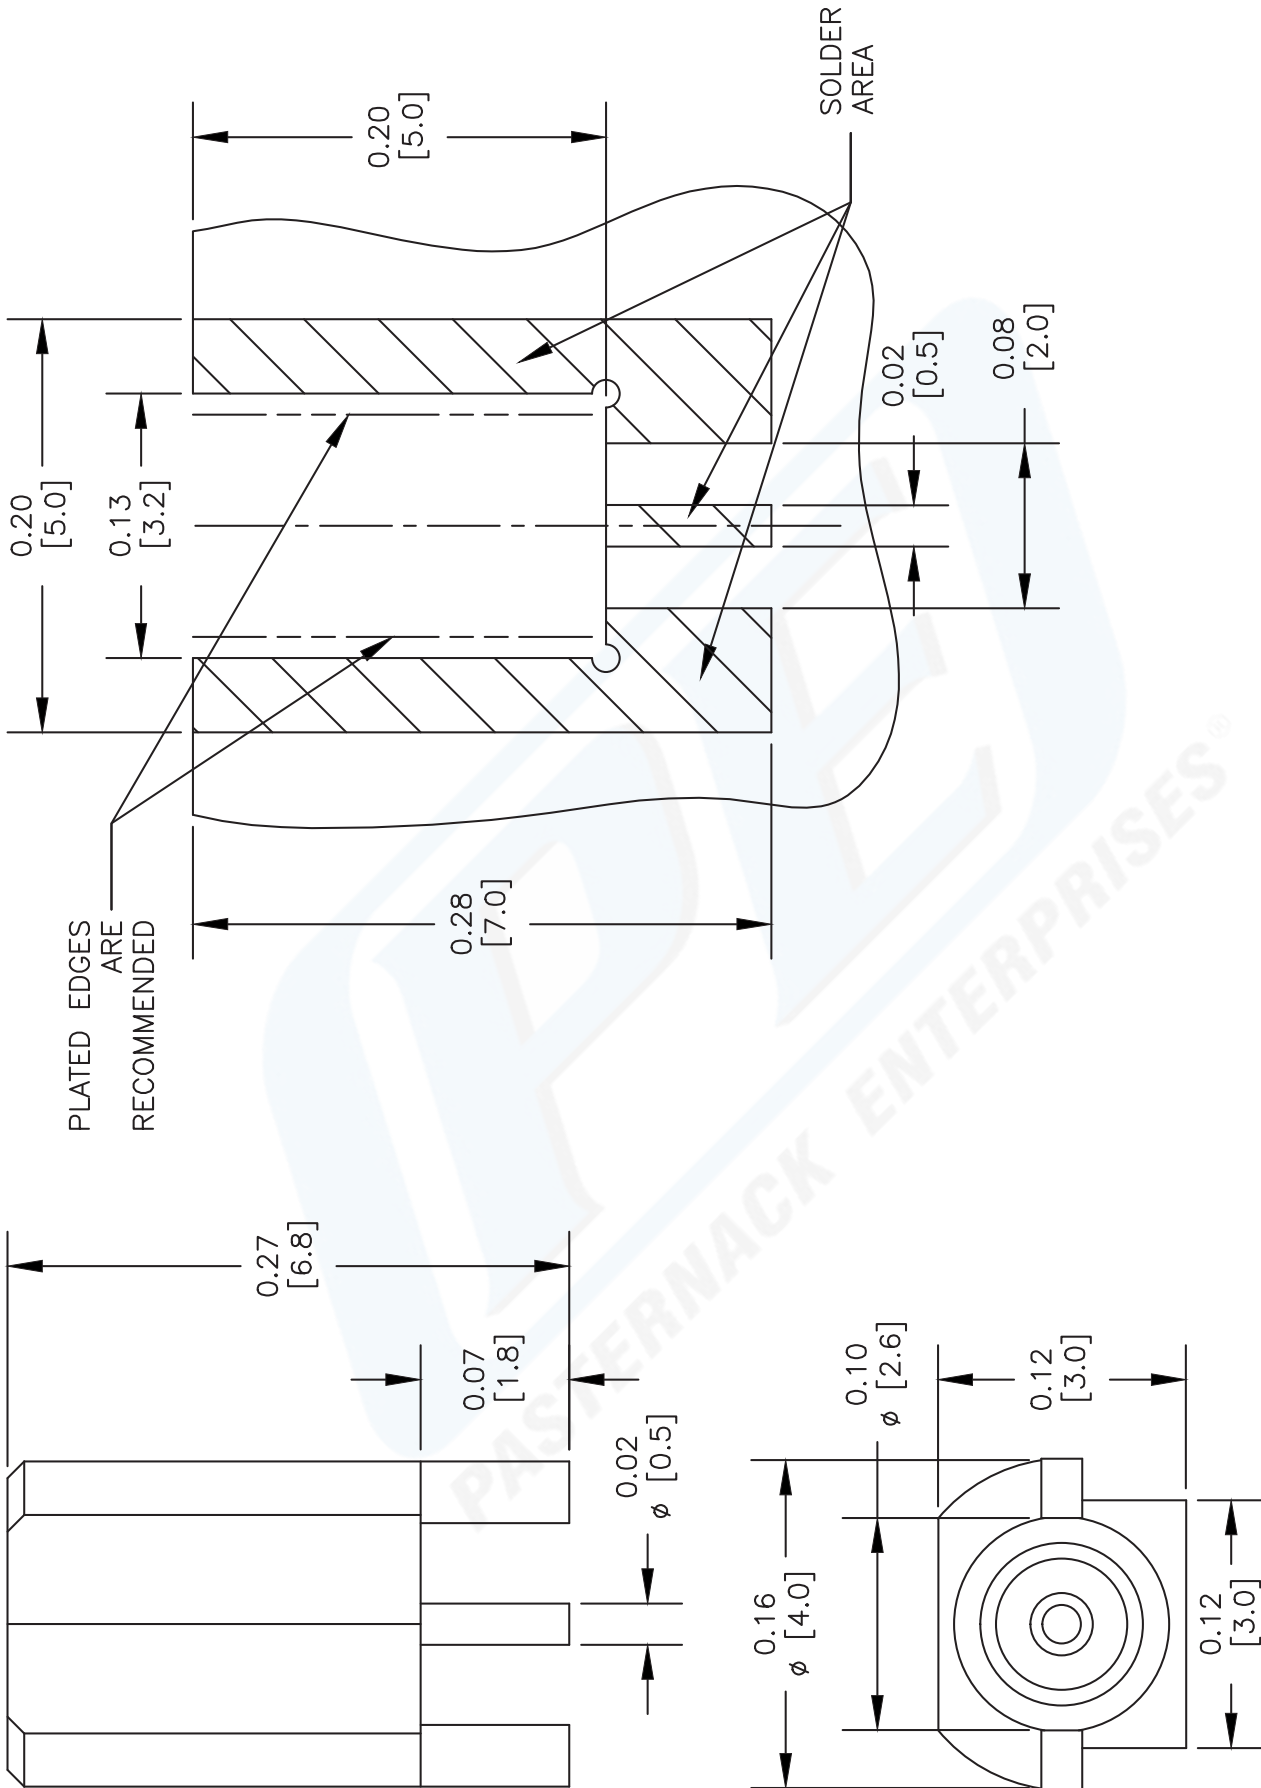

DWG TITLE

PE44490

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE

080212-B

SCALE N/A

SIZE A

2233

PE PASTERNAK®

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com