


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

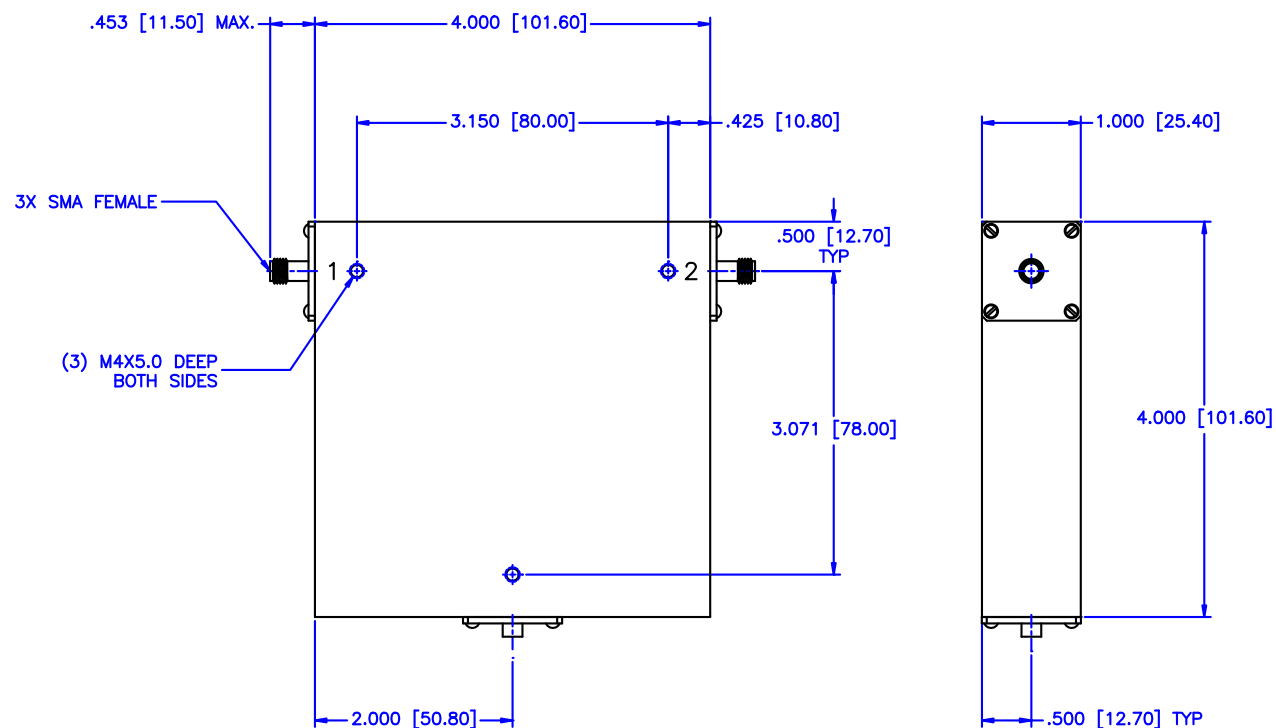

SPECIFICATIONS:

Frequency Range	0.7–1.4 GHz
Isolation	18dB Min.
Insertion loss	0.5dB Max.
VSWR	1.30:1 Max.
Operating Temperature	0°C to +50°C
Circulator Power	10W Average, 100w Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .015 ANGLE: ± 1/2°		DRAWING TITLE: COAXIAL ISOLATOR		SHEET: N/A
DRAWING: Paiboon Luekhamhan		DATE: 04-21-2010		PART NO.: IS-128
APPROVED: T. Nguyen		DATE: 04-21-2010		CAGE CODE: 0D2L5
PROPERTY MARK: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: N/A		REV: N/A
DO NOT SCALE THE DRAWING		DWG NO.: 85635		

4

3

2

1