




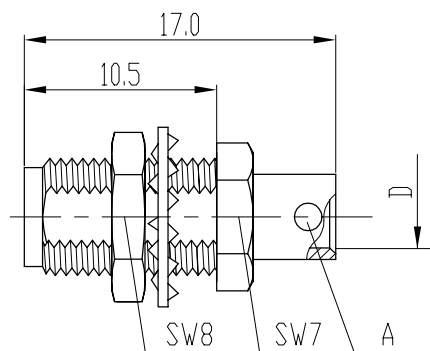

安装开孔
mounting hole



剥线尺寸
stripping dimensions



产品型号 type	电缆型号 cable type	D	A
SMA-KYB2	SFT-50-2-1、RG405/U	Ø2.2	焊孔 solder hole
SMA-KYB3	SFT-50-3-1、RG402/U	Ø3.6	无焊孔 no solder hole

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1000V
- VSWR: ≤1.35
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1000V
- 电压驻波比: ≤1.35
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium copper, gold plated
- Body: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

 	SCALE	
	2.5:1	
NAME	DATE	
DRAWN		
CHECKED		
APPROVED		

SMA-KYB2
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.