





Standards
NF C 96-315
MIL-DTL-39030

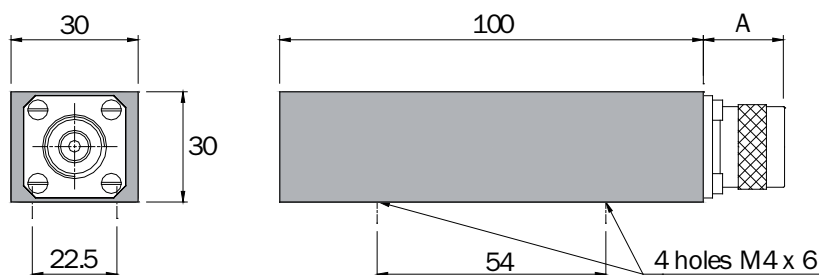

Impedance	50 $\Omega \pm 5\%$
Frequency	DC - 6 GHz
Max VSWR	≤ 1.20 at 6 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	25 W
Weight	440 g



Dimensions in mm

P/N	Connector	A
17-0453	N f	19
17-0454	N m	21