


T-004S20

4 GHz to 4.4 GHz

Communication Band Coaxial ISOLATORS & CIRCULATORS

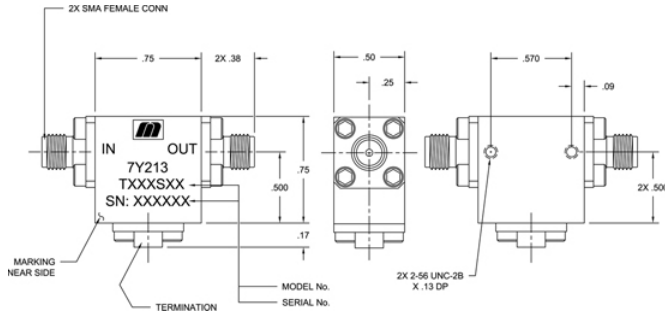

Specifications

RF Frequency	4 GHz to 4.4 GHz
Isolation	25 dB (min)
Insertion Loss	0.4 dB (max)
VSWR	1.15:1
Peak Power	100 Watts (max)
Average Power	10 Watts (max)
Power Forward	10 Watts
Power Reverse	1 Watts
Package Size	0.75 x 0.75 x 0.50"

Environmental

Operating Temperature	-40 to 85 °C
-----------------------	--------------

Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Manteca, CAL | 1-209-825-3977 | rf.mrcy.com
Specifications subject to change without notice

