


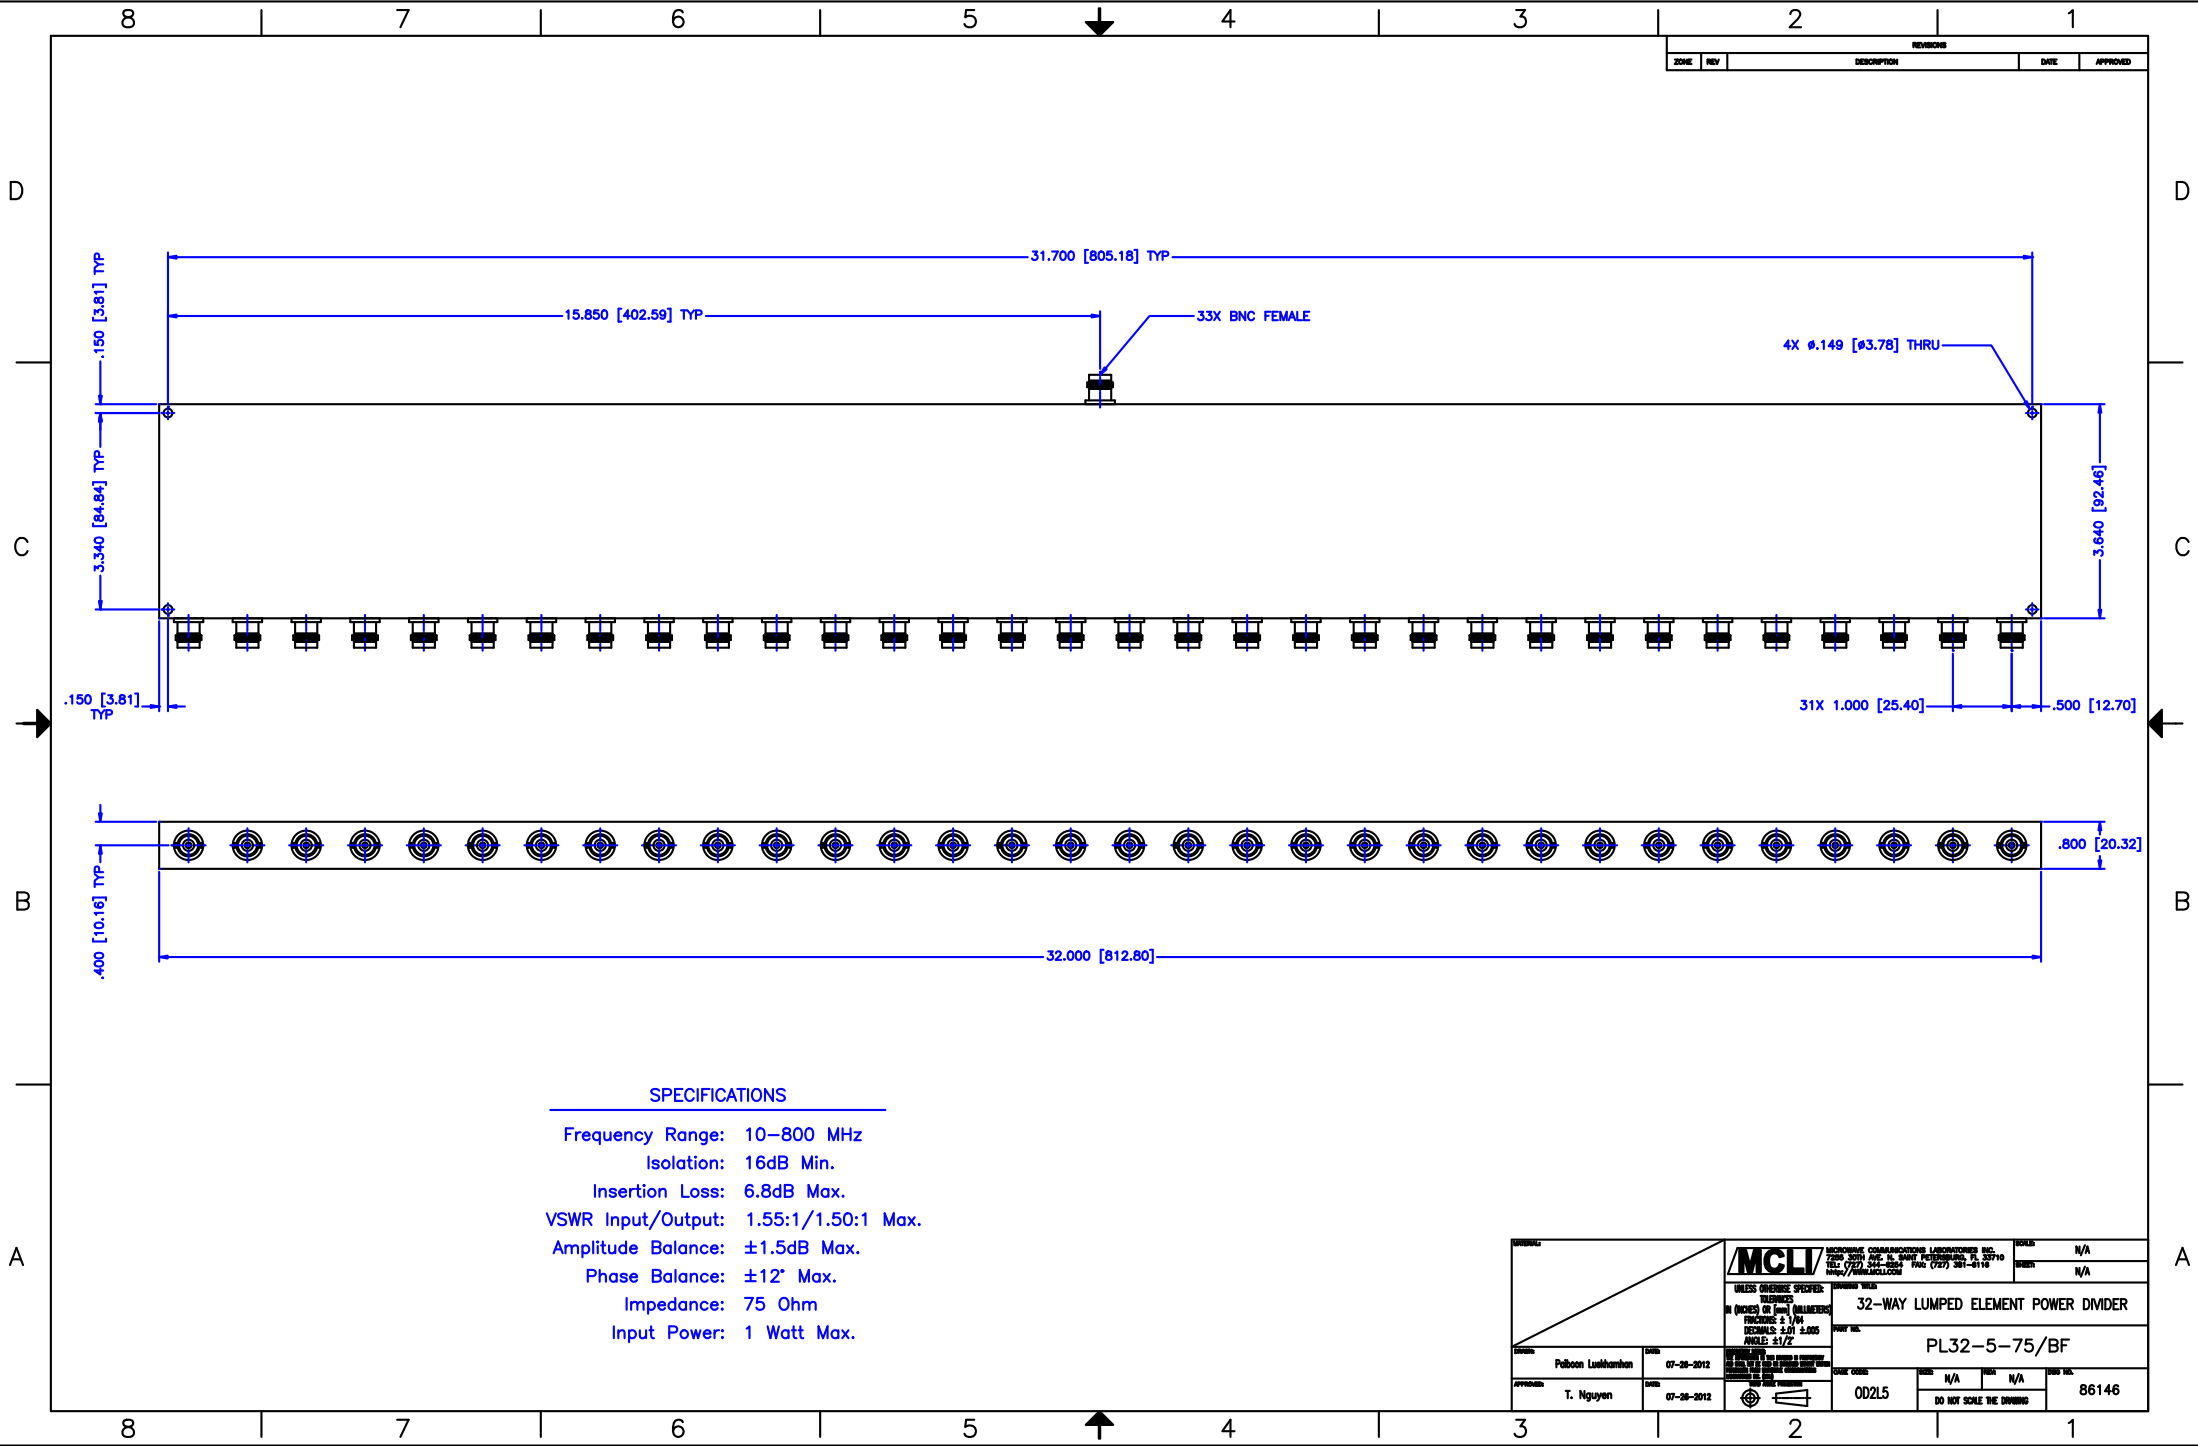

SPECIFICATIONS

- Frequency Range: 10–800 MHz
- Isolation: 16dB Min.
- Insertion Loss: 6.8dB Max.
- VSWR Input/Output: 1.55:1/1.50:1 Max.
- Amplitude Balance: ± 1.5 dB Max.
- Phase Balance: $\pm 12^\circ$ Max.
- Impedance: 75 Ohm
- Input Power: 1 Watt Max.

		MICROWAVE COMMUNICATIONS LABORATORIES INC.		DATE	N/A
		7200 20TH AVE. S.W. SUITE 1000, VANCOUVER, B.C. V6V 1G6 TEL: (604) 261-8800 FAX: (604) 261-8118 WWW.MCL1.COM		REV	N/A
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES OR (mm) DIMENSIONS FRACTIONS $\pm 1/16$ DECIMALS $\pm .005$ HOLE: $\pm 1/32$		32-WAY LUMPED ELEMENT POWER DIVIDER		PART NO.	
DESIGNED BY: Poloon Luethamman		DATE: 07-26-2012		PL32-5-75/BF	
APPROVED BY: T. Nguyen		DATE: 07-26-2012		DATE ORDERED: 002L5	DATE DELIVERED: N/A
				DO NOT SCALE THE DRAWING	86146