

SPECIFICATIONS:



FREQUENCY: 2.0 - 4.0 GHz

ISOLATION: 20 dB MIN.

VSWR: 1.30:1 MAX.

INSERTION LOSS: 0.3 dB MAX.

POWER: 30 WATTS AVG., WITH LOAD
VSWR OF 1.20:1 OR BETTER

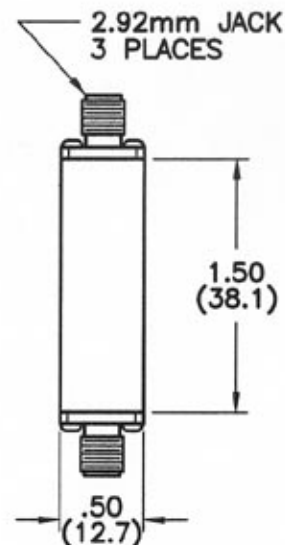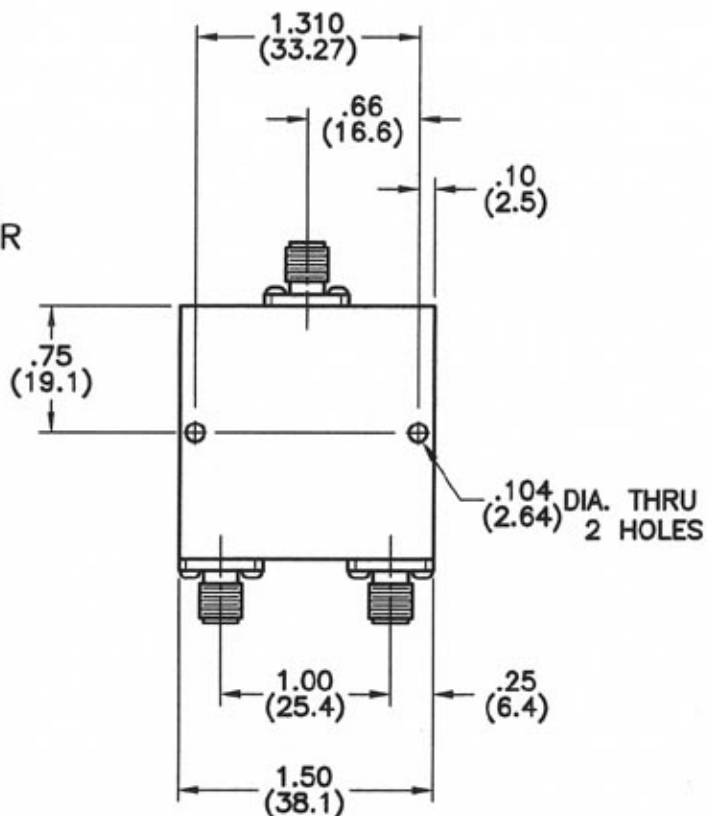

DIMENSIONS: INCHES
(MILLIMETERS)

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD.
FRANKLIN, IN 46131 (317) 736-8833

TOLERANCES

DEC.XX ± .03 FRAC ±

.XXX ± .010 ANG ±

MATERIAL

FINISH

THE INFORMATION CONTAINED IN
THIS DOCUMENT IS THE PROPERTY
OF MICROWAVE DEVICES, INC. AND
IS PROPRIETARY. IT IS NOT TO BE
COPIED OR USED FOR ANY PURPOSE
OTHER THAN AS INSTRUCTED, IN
WRITING, BY MICROWAVE DEVICES, INC.

SIGNATURES	DATE
DR G.V.Cothren	11-9-08
CHK	
APPD	
APPD	

MICROWAVE DEVICES
RF and Microwave Components

**OUTLINE, MODEL 2PD3.0-2
2-WAY DIVIDER, 2.92mm**

CAGE 60674	SIZE B	DRAWING NO. 900493-1
DRAWING SCALE 1.5:1		SHEET 1 OF 1

REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO
A	4D	ADDED POWER SPECIFICATION	2-1-07	GVC