

Specifications


Parameter	Unit	Min	Typical	Max
Center Frequency (F0)	MHz		68.0625	
Bandwidth (B)	MHz		1.625	
-3 dB Bandwidth (B3)	MHz	1.9	1.9	
-40 dB Bandwidth (B40)	MHz		2.3	2.3
Delay (T0)	μsec	7.04	7.062	7.08
Insertion Loss (IL)	dB		23.7	33.5
Amplitude Ripple	dB p-p		0.4	1
Phase Ripple	deg p-p		2.1	4
Rejection	dB	50	54	
Spurious for $ t-T0 > .9T0$	dB		-46	-44
Substrate Material	40YX-Q			

Notes:

- Center Frequency (F0) and Bandwidth (B) are defined, not measured.
- Insertion Loss is the minimum loss for $|f-F0| < .5B$
- Ripple spec applies to the $|f-F0| < .4B$, and is doubled for $.4B < |f-F0| < .5B$
- Rejection spec applies to $(B40 \text{ Spec} - B/2) < |f-F0| < F0/2$
- Specifications are at 22C only. Unit will operate undamaged from -54C to 125C with shifts $dF0 = -x \cdot F0$, $dT0 = x \cdot T0$, where $x = 3E-8 \cdot (\text{temperature} - 22C)^2$


Typical Performance

Frequency Response
(Best Fit Linear Phase Removed)

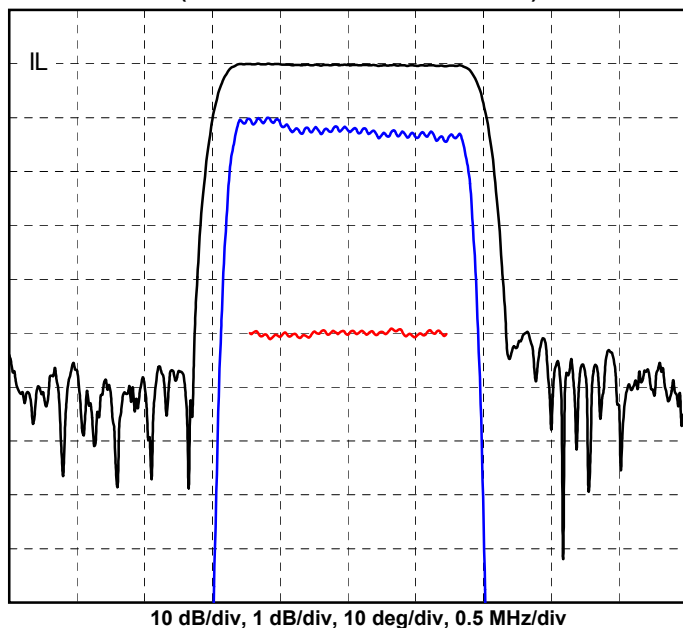



Impulse Response

FFT(Frequency Response * Cos(0.5 * PI * MIN(1, MAX(0, |f-F0| * 2.0 / (B-1.0))))^2)

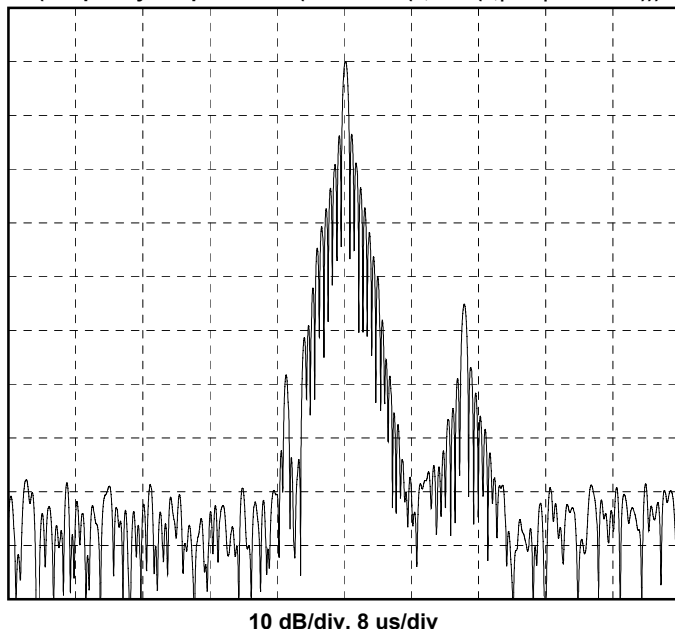

Package Outline

Matching

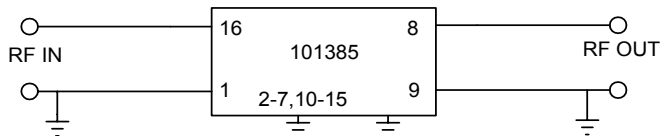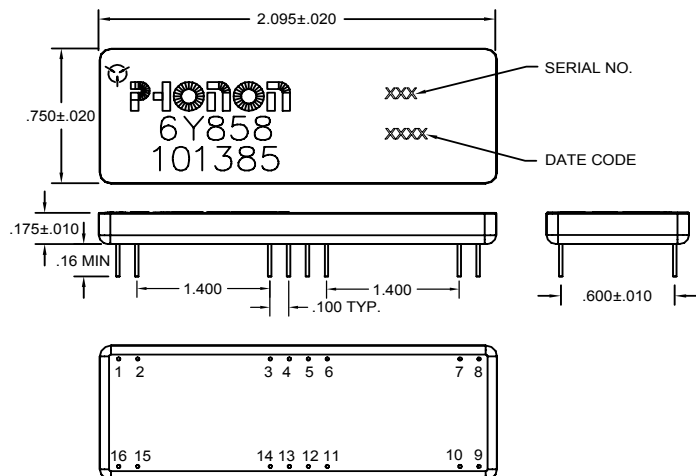

Matched S-parameters available at www.phonon.com