


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

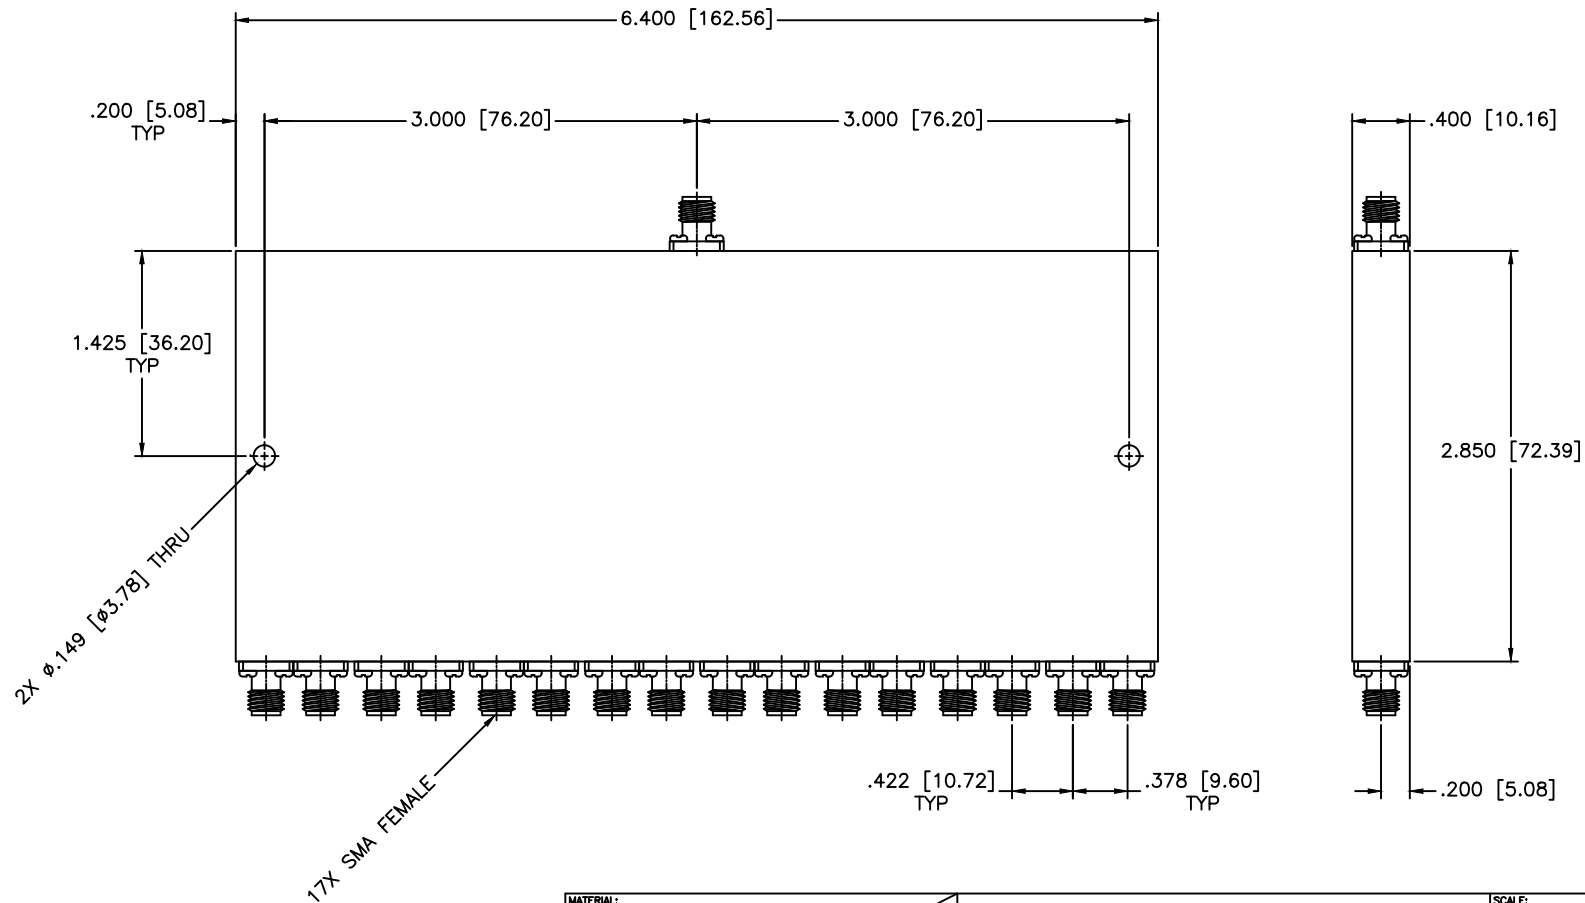

SPECIFICATIONS

Frequency Range: 3.65–4.2 GHz
 VSWR In/Out: 1.45:1/1.25:1 Max.
 Amplitude Balance: ± 1.0 dB Max.
 Phase Balance: ± 4 Deg. Max.
 Insertion Loss: 2.8dB Max.
 Isolation: 18dB Min.
 Power: 30W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A	
			SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .008$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 16-WAY POWER DIVIDER		
		PART NO. PS16-19		
DRAWN: Paiboon Luekhamhan DATE: 10-04-1999	DATE: 10-04-1999	CAGE CODE: OD2L5 SIZE: N/A REV: N/A DWG NO. 80328		
APPROVED: T. Nguyen		DO NOT SCALE THE DRAWING		