




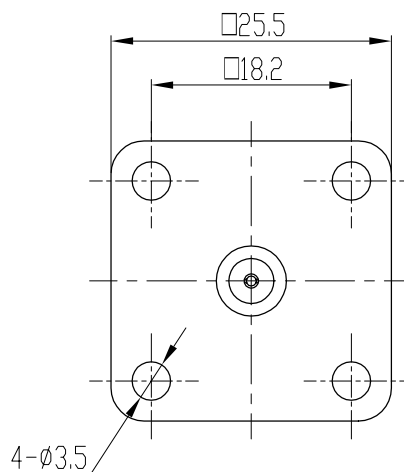

This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

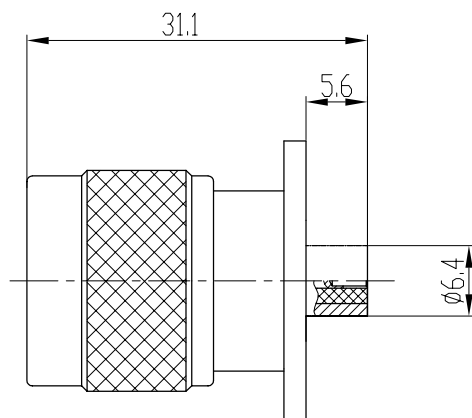

Electrical Characteristics:

- 1.Characteristic Impedance: $50\ \Omega$
- 2.Frequency range: DC~11Ghz
- 3.Contact resistance
Center conductor: $\leq 1.0\ m\Omega$
Out conductor: $\leq 0.2\ m\Omega$
- 4.Insulation resistance: $\geq 5000M\Omega$
- 5.Insulator withstanding: 1500V
- 6.Durability: 500cycles

Application: MIL-C-39012/1E

Material&Finishing

- 1.Center contact :
Male: brass, gold plated
- 2.Bodies: brass, nickel plated
- 3.Insulators: PTFE
- 4.Gasket: silicone rubber

主要性能指标:

- 1.特性阻抗: $50\ \Omega$
- 2.频率范围: DC~11Ghz
- 3.接触电阻:
中心导体: $\leq 1.0\ m\Omega$
外导体: $\leq 0.2\ m\Omega$
- 4.绝缘电阻: $\geq 5000M\Omega$
- 5.介质耐压: 1500V
- 6.插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 1.中心接触件:
插针: 黄铜, 镀金
- 2.壳体: 黄铜, 镀镍
- 3.绝缘子: 聚四氟乙烯
- 4.密封圈: 硅橡胶

		SCALE	
		1.5:1	
	NAME	DATE	
DRAWN			
CHECKED			
APPROVED			

N-JFD10
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.