


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

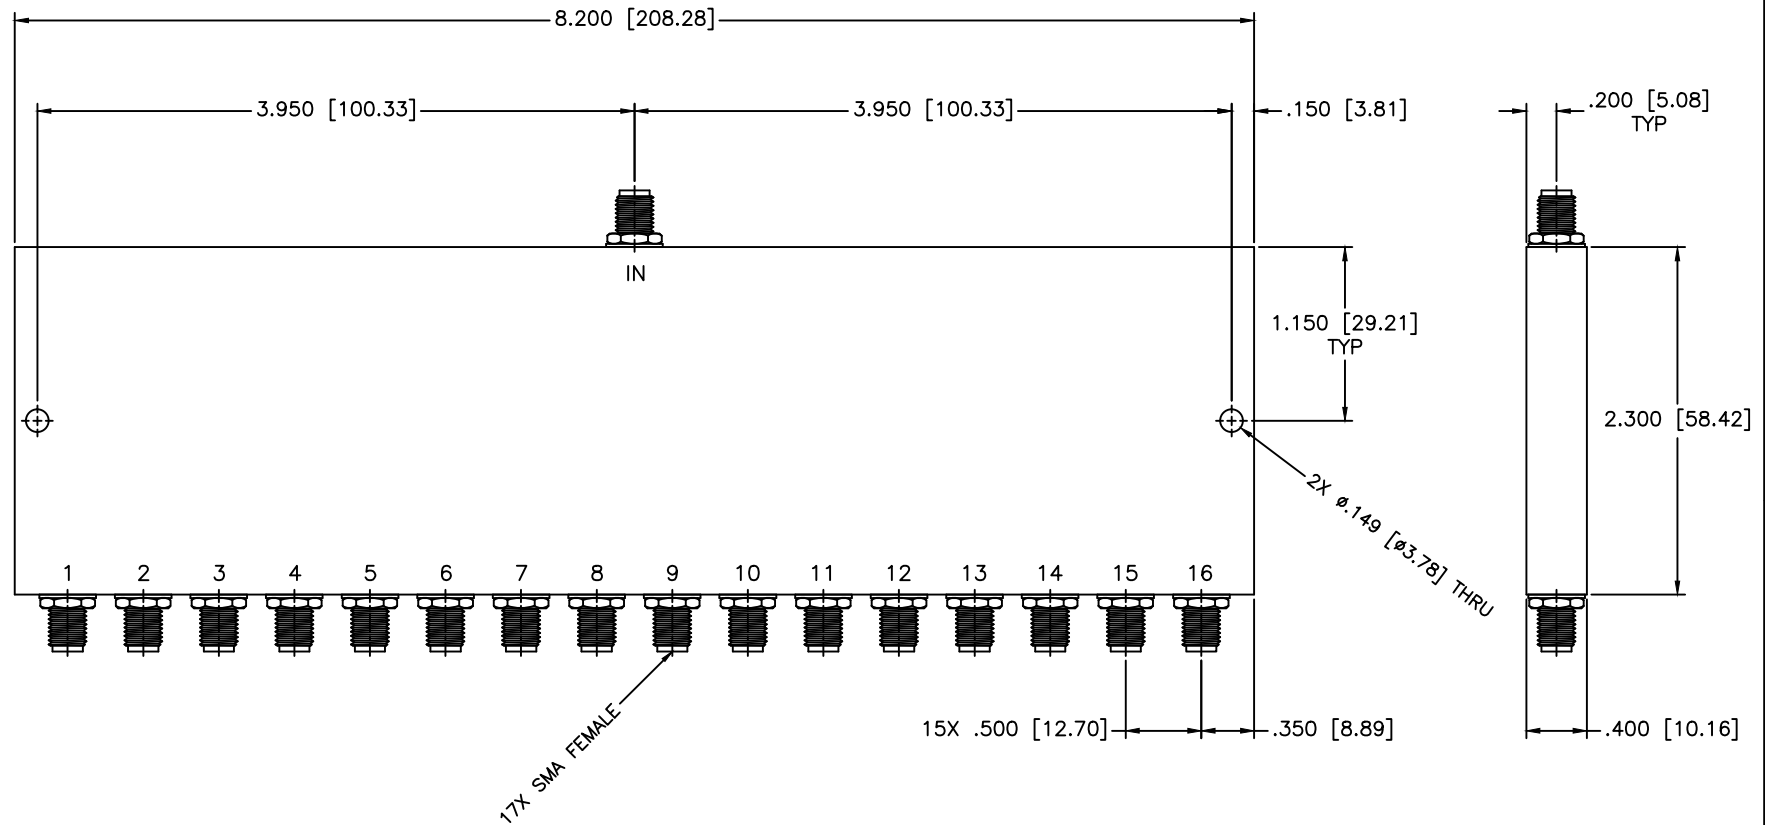

SPECIFICATIONS

Frequency Range: 50–100 MHz
 Insertion Loss: 1.8dB Max.
 Isolation: 20dB Min.
 Amplitude Balance: ± 0.5 dB Max.
 VSWR: 1.50:1 Max.
 Phase Balance: ± 9 Deg. Max.
 Power: 1 Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 10-30-2007 APPROVED: T. Nguyen DATE: 10-30-2007		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 16-WAY POWER DIVIDERS	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PL16-20	
		CAGE CODE: OD2L5 SIZE: N/A REV: A DO NOT SCALE THE DRAWING		DWG. NO.: 82966	