

MINISMP MALE FULL DETENTE HERMETIC SHROUD

SC5462


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACTS: BeCu
PLATING: Au PER MIL-G-45204
INSULATOR: TORLON
FORCE TO ENGAGE: 4 LBS MAX
FORCE TO DISENGAGE: 2.5LBS MIN
ROHS COMPLIANT

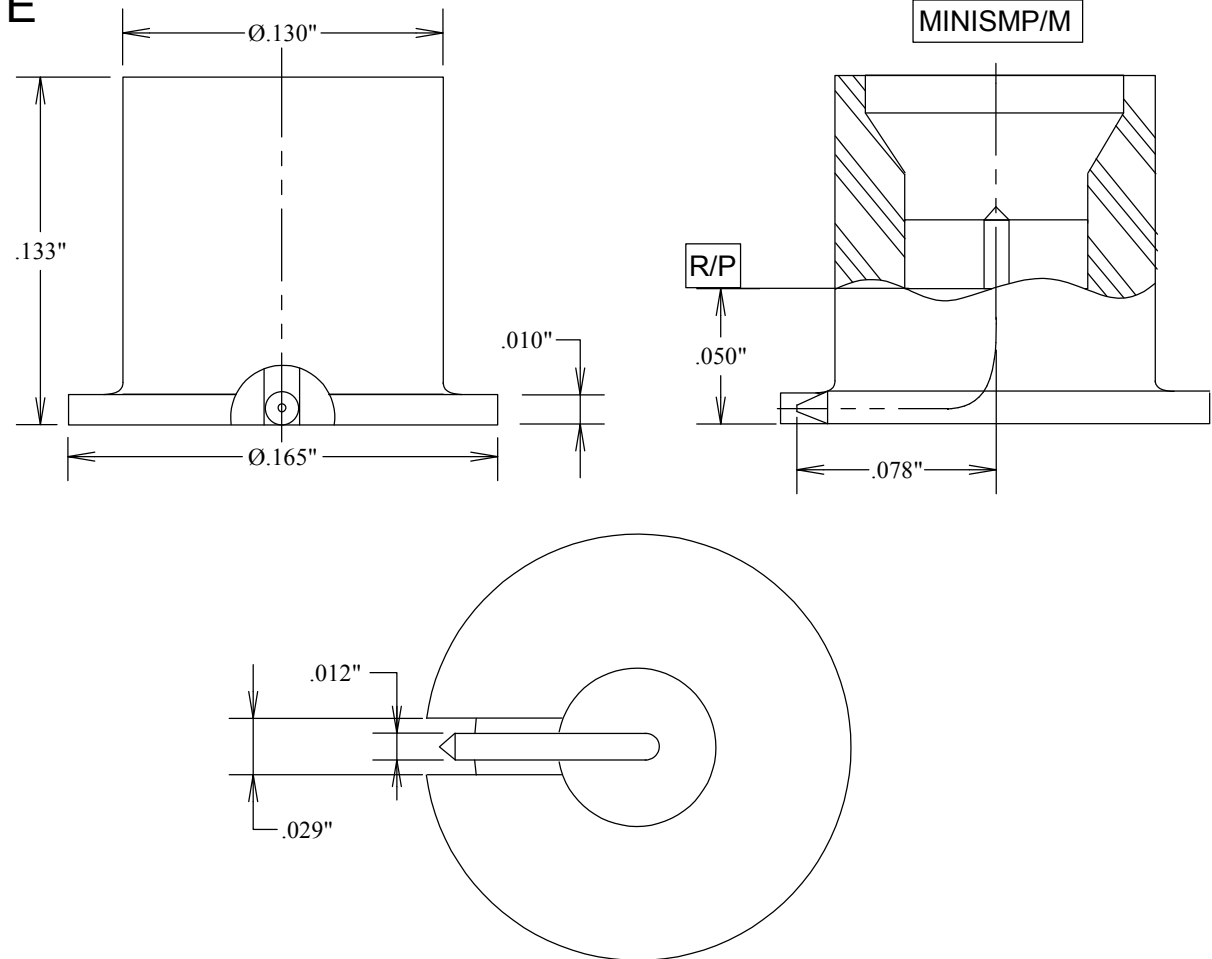

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**MINISMP MALE FULL DETENTE
HERMETIC SHROUD**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5462	--
SCALE	SHEET		