

All components used in this connector conform to RoHS standards.



Tolerances
1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1


Dimensions are in Millimeters

Revisions	Approved	Date
Description/Approved/Date	M.H.	04/25/2011
	Checked	Date
	M.H.	04/22/2011
	Drawn	Date
	T.J.A.	04/22/2011

NOTES (plating thickness in microinches):

- Per QQ-B-626
- Per QQ-S-764
- Per QQ-C-530
- Per QQ-B-750
- Per MIL-P-19488
- Per ZZ-R-765
- Per WW-1-799
- Gold pl. 5 min. over nickel pl. 50 min. over copper strike
- Nickel pl. 100 min. over copper strike
- Gold pl. 5 min. over nickel pl. 50 min. over copper strike

Approved by:
Date:

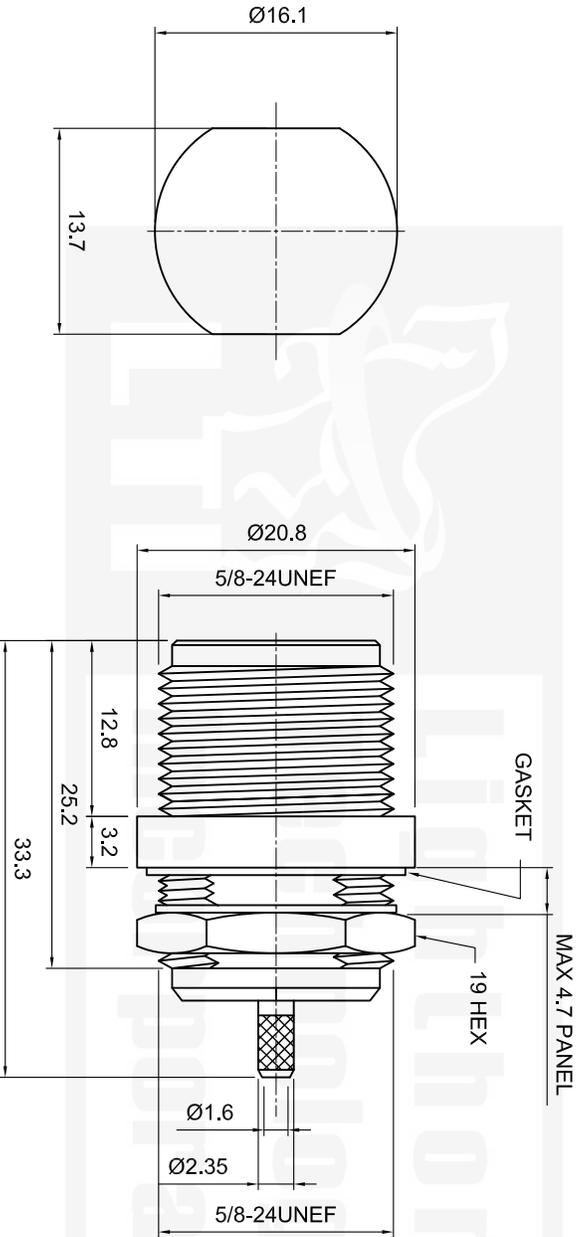

MOUNTING HOLE

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Female	BeCu, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	Silicone Rubber, Note 6	None
Hex Nut	Brass, Note 1	Same as body
Lock Washer		Same as body

	Lighthouse Technologies, Inc. 9511 Ridgely Court, Suite B San Diego, CA 92123 800-443-3446	Part Number:	LTJ-NSF13FNT-316
		Description	N type front mount bulkhead crimp jack for RG-316
Scale	Nickel plated brass body, Teflon dielectric, JP 67 rated	Drawing No.	NSF13F-316
File Name		File Name	NSF13FNT-316