






Standards
NF C 96-315
MIL-DTL-39030

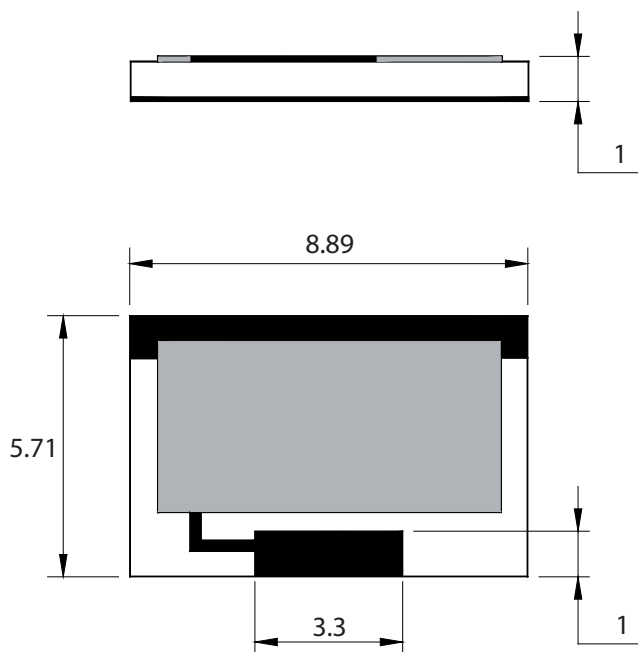

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier

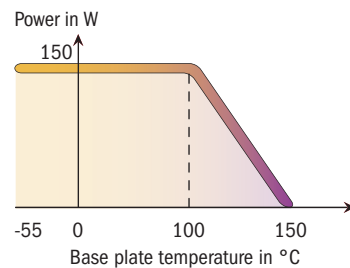

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0013Y	3	150	50	1.20*

* Optimized for GSM/DCS/UMTS applications



Available on Tap and Reel Packaging

mm	inch
1	0.039
3.3	0.130
5.71	0.225
8.89	0.350