


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

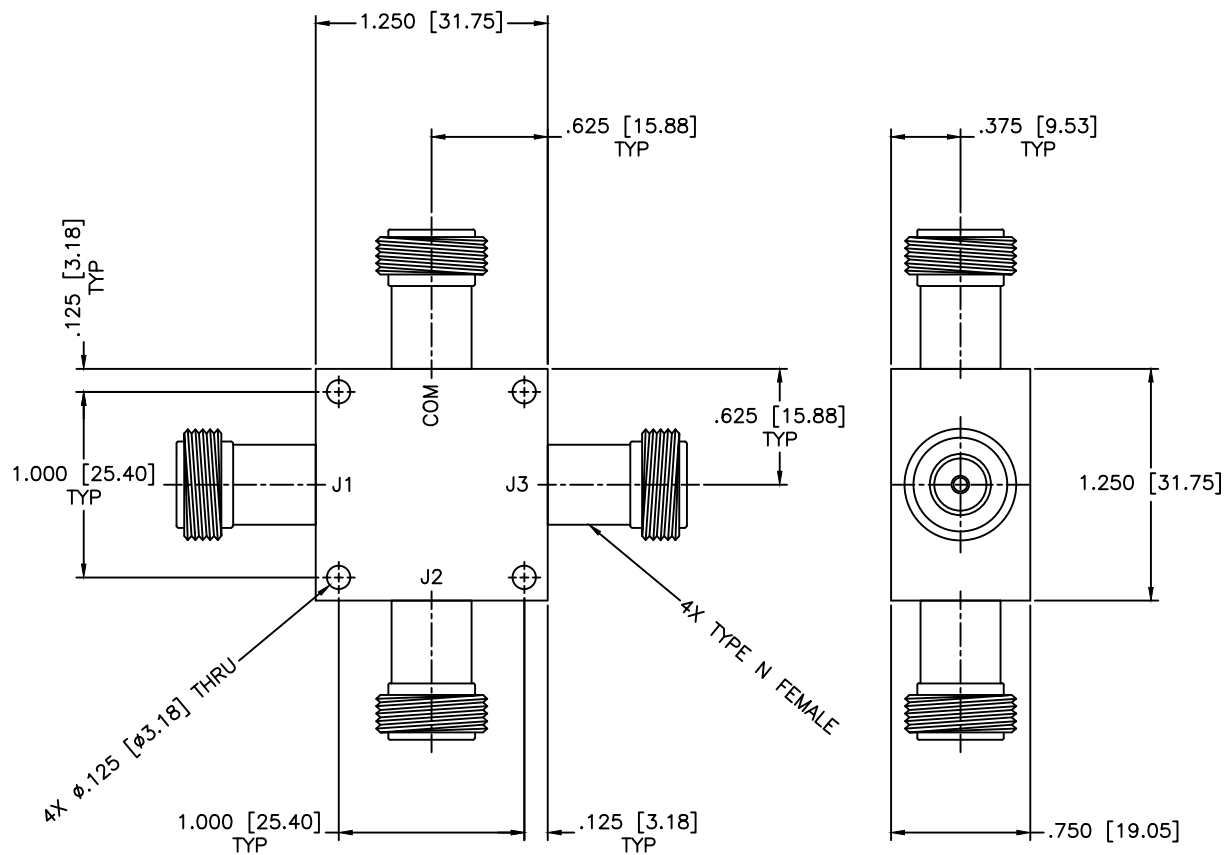

SPECIFICATIONS

Frequency Range: 200–500 MHz
 Isolation: 30dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 0.8dB Max.
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 4 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE:		3-WAY POWER DIVIDER		
PART NO.		PL3-3/NF		
DRAWN: Paiboon Luekhamhan	DATE: 10-23-1997	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
APPROVED: T. Nguyen	DATE: 10-23-1997	CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING	DWG NO. 80146