


剥线尺寸
stripping dimension

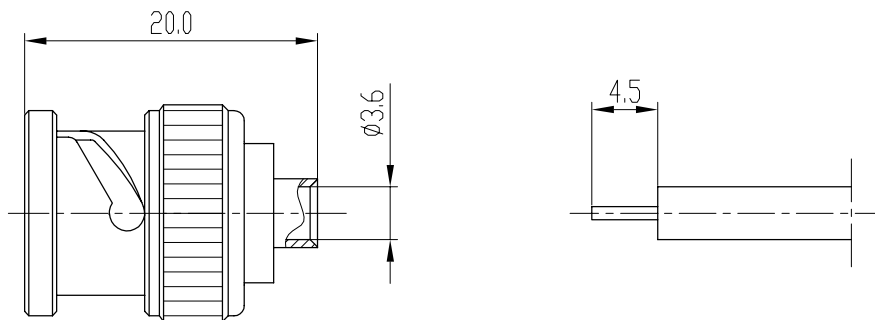

产品型号 type	电缆型号 cable type
BNC-JB3	SFT-50-3-1、RG402/U

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: $\leq 1.5\ m\Omega$
Out conductor: $\leq 0.2\ m\Omega$
- Insulation resistance: $\geq 5000M\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.35
- Durability: 500cycles

Application: MIL-C-39012/16E

Material&Finishing

- Center contact :
Male: brass, gold plated
- Body and other metal parts:
brass, gold or nickel plated
- Insulators: PTFE


主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: $\leq 1.5\ m\Omega$
外导体: $\leq 0.2\ m\Omega$
- 绝缘电阻: $\geq 5000M\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.35
- 插拔次数: 500次

执行标准: MIL-C-39012/16E

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体和其它金属零件: 黄铜, 镀金或镀镍
- 绝缘子: 聚四氟乙烯

	SCALE		BNC-JB3 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table border="1"> <thead> <tr> <th>FRACTIONS</th> <th>DECIMALS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>.X±</td> <td>.15</td> <td>±1°</td> </tr> <tr> <td>.XX±</td> <td>.05</td> <td></td> </tr> <tr> <td>.XXX±</td> <td></td> <td></td> </tr> </tbody> </table>	FRACTIONS	DECIMALS	ANGLES	.X±	.15	±1°	.XX±	.05		.XXX±		
	FRACTIONS	DECIMALS			ANGLES											
.X±	.15	±1°														
.XX±	.05															
.XXX±																
NAME	DATE	2:1														
DRAWN			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.													
CHECKED																
APPROVED																