

2-Way Resistive Power Divider


Model No. BPR-008-2300-2

- 8-2300MHz
- Low VSWR
- Low Insertion Loss
- Excellent Amplitude Balance
- Wide Operating Temperature
- Rugged Construction



General Specifications

Frequency Range	8-2300MHz
Insertion Loss	6.1dB max.
Isolation	6dB min.
VSWR	1.1:1 max.
Input Power	100mW
Amplitude Balance	0.1dB max.
Operating Temperature	-55 to +70C
Storage Temperature	-55 to +85C
Connectors	SMA Female
Weight	0.1lbs max.
Body Finish	Paint

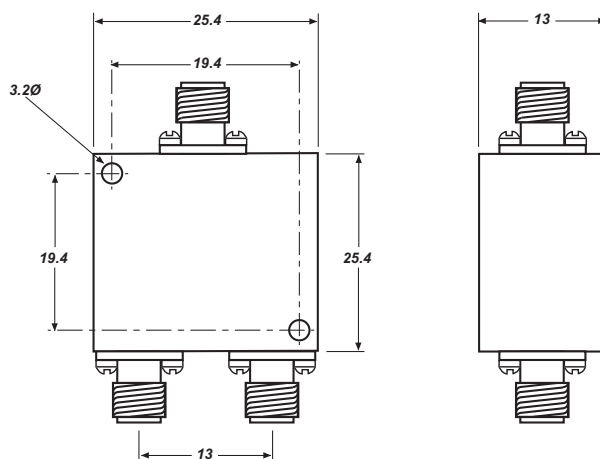

Dimensions are in mm

We reserve the right to change standard product specifications without notice but will be pleased to consider control drawings for quotation.

Passive Components

Tel. +44 (0) 1376 550220 Fax. +44 (0) 1376 552145 Email: sales@atlantecrf.com www.atlantecrf.com
40A Springwood Drive, Braintree, Essex CM7 2YN, England