


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

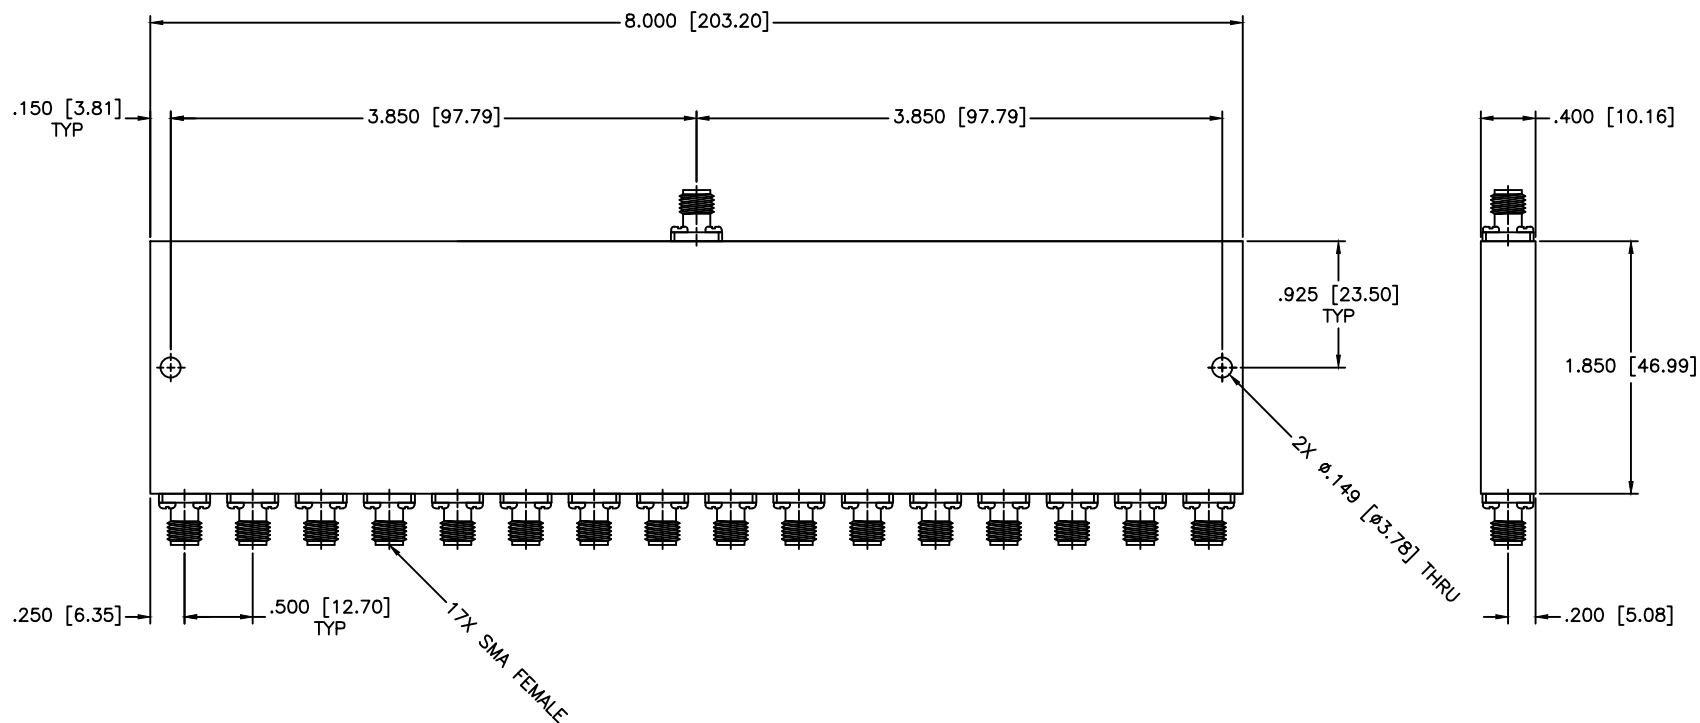

SPECIFICATIONS

Frequency Range: 12–18 GHz
 VSWR: 1.90:1 Max.
 Amplitude Balance: ± 1 dB Max.
 Phase Balance: ± 9 Deg. Max.
 Insertion Loss: 4.9dB Max.
 Isolation: 15dB Min.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
				SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 04-02-2012		DRAWING TITLE:	
APPROVED: T. Nguyen		DATE: 04-02-2012		16-WAY POWER DIVIDER	
				PART NO.	
				PS16-9	
		CAGE CODE:	SIZE:	REV:	DWG NO.
		0D2L5	A	A	82075
		DO NOT SCALE THE DRAWING			

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
<http://www.mcli.com>

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: $\pm 0.01 \pm 0.05$
 ANGLE: $\pm 1/2^\circ$

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

