



Industrial Microwave +
Plasma Systems




H-Bend MW3002B-260CD

Waveguide Components (90° / 915 MHz / WR 975)

Features:

- Low VSWR
- Low insertion loss
- Full waveguide band performance

Outline Dimensions (mm):

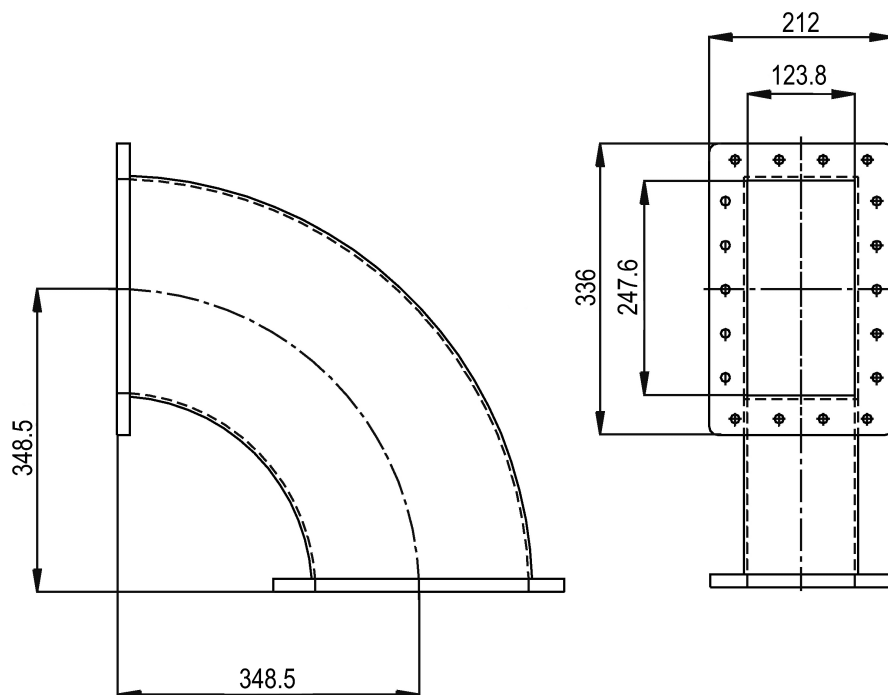

MUEGGE GMBH

Hochstraße 4-6 · 64385 Reichelsheim

Fon +49 (0) 6164 - 93 07 11 · Fax +49 (0) 6164 - 93 07 93

info@muegge.de · www.muegge.de

H-Bend MW3002B-260CD

Industrial Microwave +
Plasma Systems



Specifications:

Frequency:	915 MHz +/-25 MHz
HF-Power:	Max. 100 kW
Waveguide:	WR 975
Waveguide flange:	UDR 9
Angle:	90 °
Radius:	348.5 mm
Material:	Aluminum
Finish:	Painted (RAL 7035)
Dimensions (L x W x H):	472.3 mm x 212 mm x 472.3 mm

Options:

- Material (e.g.: copper, brass)
- Special finish (e.g.: chromated, etched, silver plated, painted)
- Special flanges
- Arbitrary angle
- Special radius