
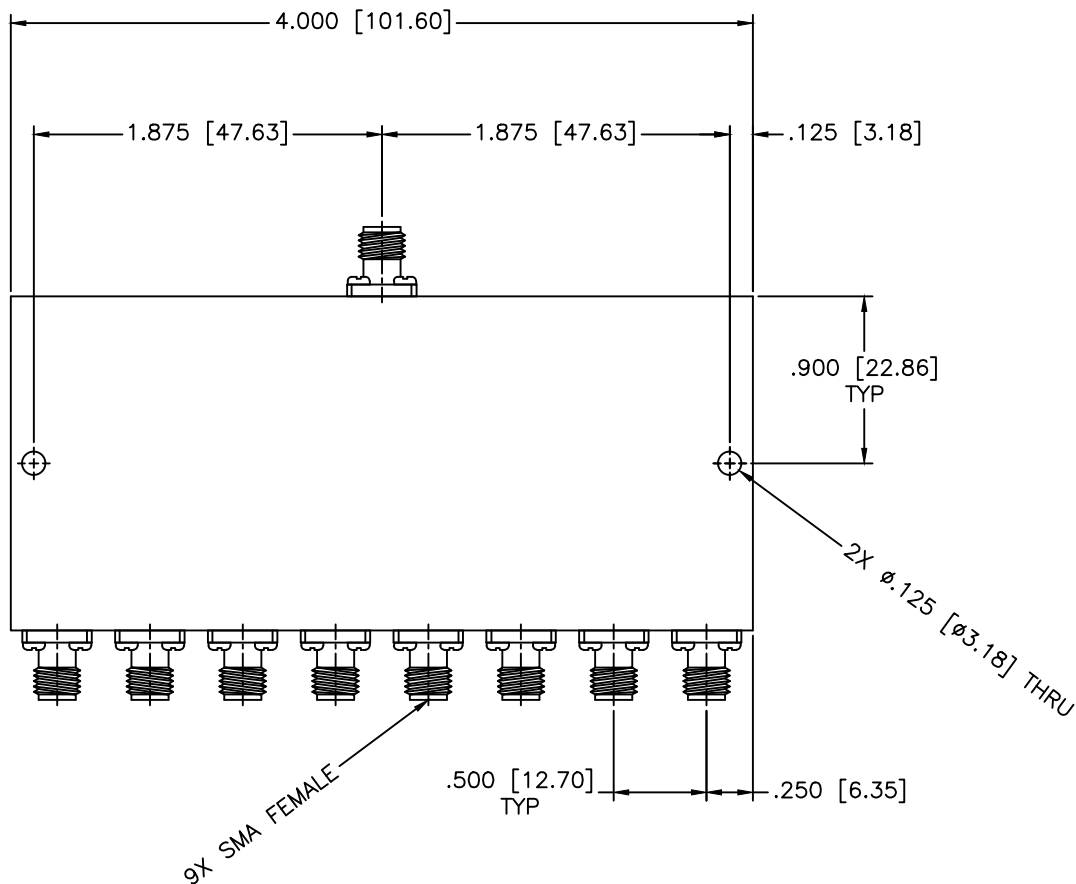


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

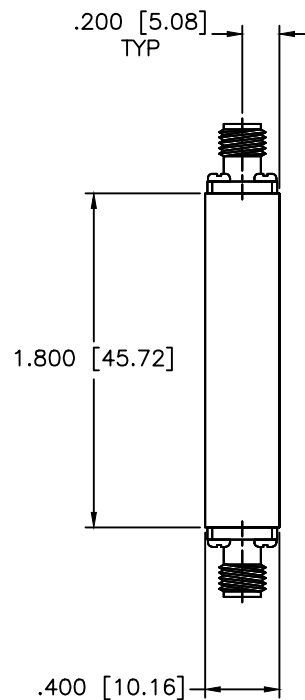

9X SMA FEMALE

SPECIFICATIONS

Frequency Range: 18–26.5 GHz
 Insertion Loss: 3.5dB Max.
 Isolation: 14dB Min.
 VSWR: 1.20:1 Max.
 Phase Balance: ± 12 Deg. Max.
 Amplitude Balance: ± 0.8 dB Max.
 Power Rating: 10 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A	
			SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 8-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO.: PS8-157		
DATE: 09-07-1999		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 09-07-1999		
THIRD ANGLE PROJECTION		SIZE: A REV: A DWG. NO. 85037		
		DO NOT SCALE THE DRAWING		