

Coaxial

# Voltage Controlled Oscillator

## ZX95-148+

5V Tuning for PLL IC's 127 to 148 MHz

### Features

- linear tuning characteristics
- low phase noise
- protected by US patent 6,790,049

### Applications

- R & D
- lab
- instrumentation
- defence systems
- satellite systems



CASE STYLE: GB956

Connectors	Model	Price	Qty.
SMA	ZX95-148-S+	\$44.95 ea.	(1-9)

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications


MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Typ.			Typ.	Typ.
ZX95-148+	127	148	+3.5	-84	-110	-131	-152	0.5	5	5-11	45	20	-90	-18	-10	0.3	1.5	4.5	25

### Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	6.5V
Absolute Max. Tuning Voltage (Vtune)	7.0V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

### Outline Drawing

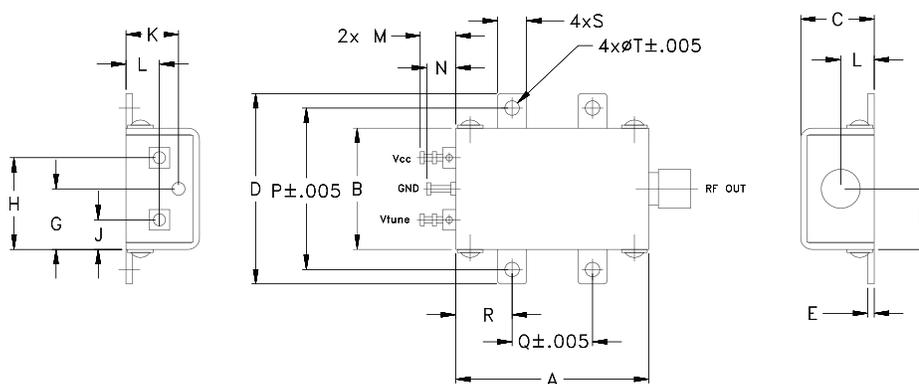

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
1.20	.75	.46	1.18	.04	.38	.38	.57	.18	.33	.21	.22	.18	1.00	.50	.35	.18	.106	grams
30.48	19.05	11.68	29.97	1.02	9.65	9.65	14.48	4.57	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	35.0



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).







REV. OR  
M111053  
EDR-8618F2  
ZX95-148+  
RAV  
120830  
Page 1 of 2

# Performance Data & Curves\*

# ZX95-148+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 138 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	14.00	118.2	115.7	113.9	4.00	4.01	3.86	16.51	-12.4	-29.4	-34.3	1.81	0.34	-83.8	-110.3	-130.8	-151.0	1.0	-83.84
0.50	11.60	124.3	122.3	121.0	3.85	3.78	3.64	16.33	-14.7	-28.1	-36.3	1.85	0.40	-84.0	-109.5	-130.5	-150.3	2.0	-92.09
0.75	10.86	127.0	125.2	124.0	3.79	3.70	3.55	16.36	-15.6	-27.9	-37.1	1.68	0.43	-81.9	-109.2	-130.8	-150.5	3.5	-98.54
1.00	10.03	129.6	128.0	126.7	3.73	3.64	3.47	16.47	-16.2	-28.1	-37.6	1.41	0.38	-81.4	-110.0	-131.5	-152.3	6.0	-104.91
1.25	9.19	132.1	130.5	129.2	3.68	3.60	3.41	16.62	-16.8	-28.3	-37.8	1.08	0.28	-80.7	-110.8	-132.0	-152.6	8.5	-108.52
1.50	8.65	134.3	132.8	131.5	3.65	3.58	3.39	16.79	-17.4	-28.4	-38.1	0.94	0.26	-82.9	-109.7	-132.6	-152.9	10.0	-109.87
1.75	8.19	136.5	134.9	133.7	3.63	3.56	3.36	16.94	-17.9	-28.5	-38.4	0.97	0.30	-82.1	-109.9	-132.5	-152.5	20.8	-117.50
2.00	7.77	138.5	137.0	135.8	3.60	3.55	3.35	17.09	-18.3	-28.6	-38.9	1.06	0.27	-83.8	-110.4	-132.0	-152.6	35.5	-122.65
2.25	7.40	140.4	138.9	137.7	3.58	3.53	3.33	17.21	-18.7	-28.8	-39.0	1.17	0.26	-86.3	-109.9	-131.8	-152.3	60.7	-127.53
2.50	7.06	142.2	140.8	139.6	3.54	3.51	3.32	17.31	-19.1	-29.1	-38.8	1.28	0.05	-84.3	-109.6	-131.9	-153.3	86.7	-130.78
2.75	6.71	143.9	142.5	141.5	3.51	3.50	3.32	17.39	-19.5	-29.4	-38.7	1.39	0.10	-85.3	-109.4	-131.7	-151.7	100.0	-132.16
3.00	6.36	145.5	144.2	143.2	3.48	3.49	3.31	17.45	-19.9	-29.6	-38.7	1.50	0.32	-84.4	-109.9	-131.8	-151.3	148.1	-135.65
3.25	6.02	147.1	145.8	144.8	3.45	3.47	3.30	17.49	-20.3	-29.7	-38.9	1.60	0.27	-83.8	-109.1	-131.5	-151.7	177.0	-137.18
3.50	5.69	148.6	147.3	146.4	3.43	3.46	3.30	17.52	-20.7	-29.7	-39.1	1.68	0.40	-86.1	-109.2	-131.5	-151.6	211.6	-138.84
3.75	5.36	150.0	148.7	147.9	3.41	3.45	3.30	17.51	-21.1	-29.7	-39.2	1.76	0.36	-82.6	-109.2	-131.5	-152.8	302.4	-141.97
3.90	5.17	150.8	149.5	148.7	3.40	3.44	3.29	17.51	-21.4	-29.7	-39.2	1.80	0.40	-82.3	-108.7	-131.2	-152.1	361.5	-143.55
4.25	4.74	152.7	151.3	150.5	3.39	3.43	3.29	17.49	-22.0	-29.8	-39.0	1.88	0.41	-81.6	-108.9	-130.5	-151.7	507.5	-146.53
4.50	4.41	153.9	152.5	151.7	3.39	3.42	3.28	17.46	-22.3	-29.9	-38.8	1.90	0.31	-80.6	-108.7	-130.2	-151.7	606.7	-148.23
4.75	4.04	155.1	153.6	152.8	3.39	3.41	3.27	17.42	-22.8	-30.0	-38.7	1.90	0.22	-80.1	-107.9	-130.2	-150.2	851.6	-151.08
5.00	3.64	156.2	154.6	153.7	3.40	3.40	3.26	17.38	-23.1	-30.2	-38.6	1.85	0.08	-80.0	-107.2	-129.1	-150.0	1000.0	-152.50

\*at 25°C unless mentioned otherwise

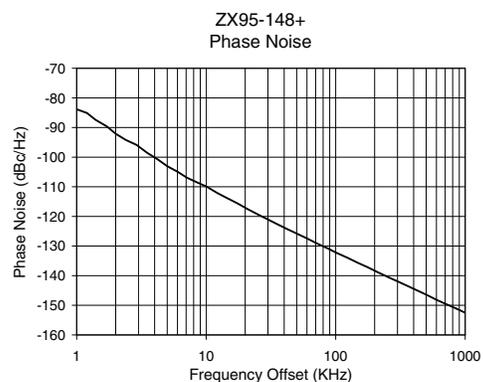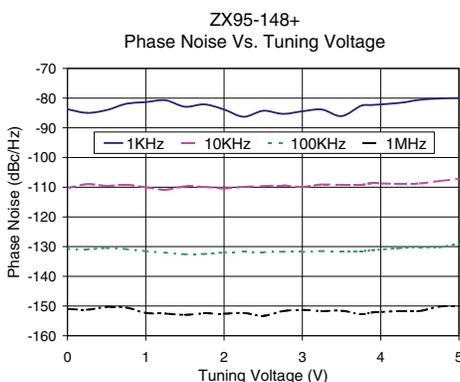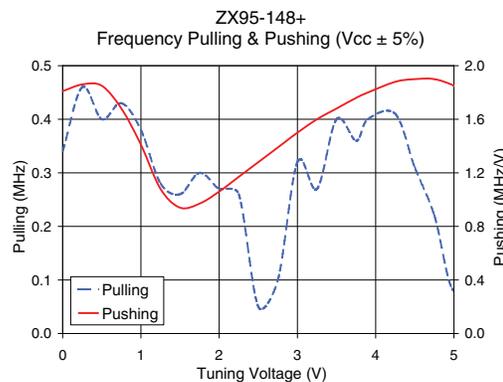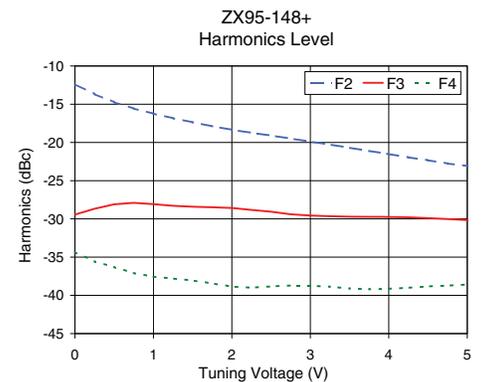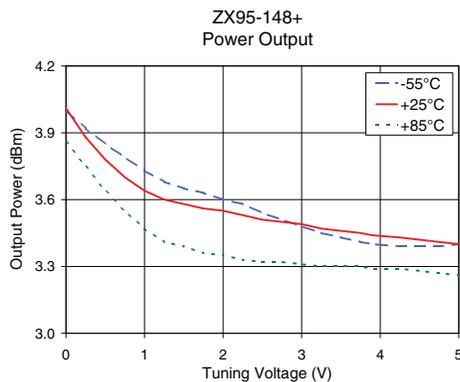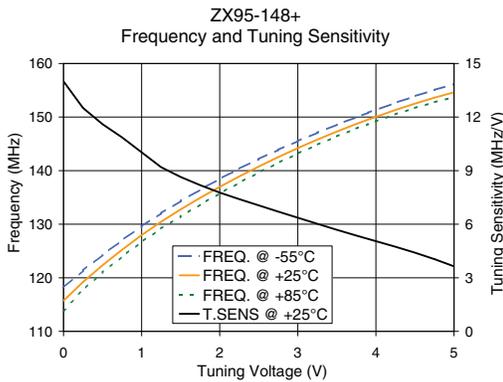

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).