


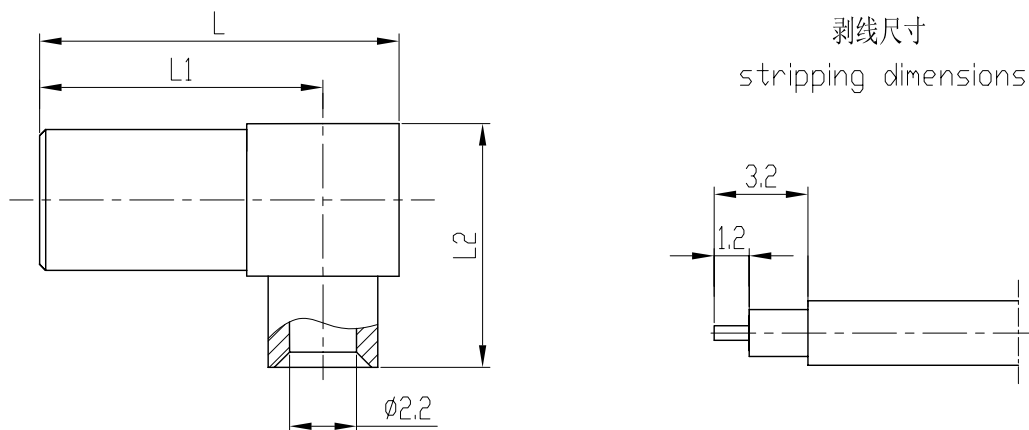

产品型号 type	配接电缆 cable type	L	L1	L2
SSMB-KWB2	SFT-50-2-1、RG405/U	11.8	9.3	8
SSMB-KWB2A		12.3	9.55	10.3

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 5.0 \text{ m}\Omega$
Out conductor: $\leq 2.5 \text{ m}\Omega$
- Insulation resistance: $\geq 1000 \text{ M}\Omega$
- Insulator withstanding: 500V
- VSWR: ≤ 1.4
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 5.0 \text{ m}\Omega$
外导体: $\leq 2.5 \text{ m}\Omega$
- 绝缘电阻: $\geq 1000 \text{ M}\Omega$
- 介质耐压: 500V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

Application: IEC 169-19


执行标准: IEC 169-18

Material&Finishing

材料和镀层

- Center contact :
Female: beryllium copper, gold plated
- Body: brass, gold plated
- Insulators: PTFE

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

		SCALE		SSMB-KWB2	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		4:1			
	NAME	DATE	RF COAXIAL CONNECTOR		
DRAWN			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.		
CHECKED					
APPROVED					