


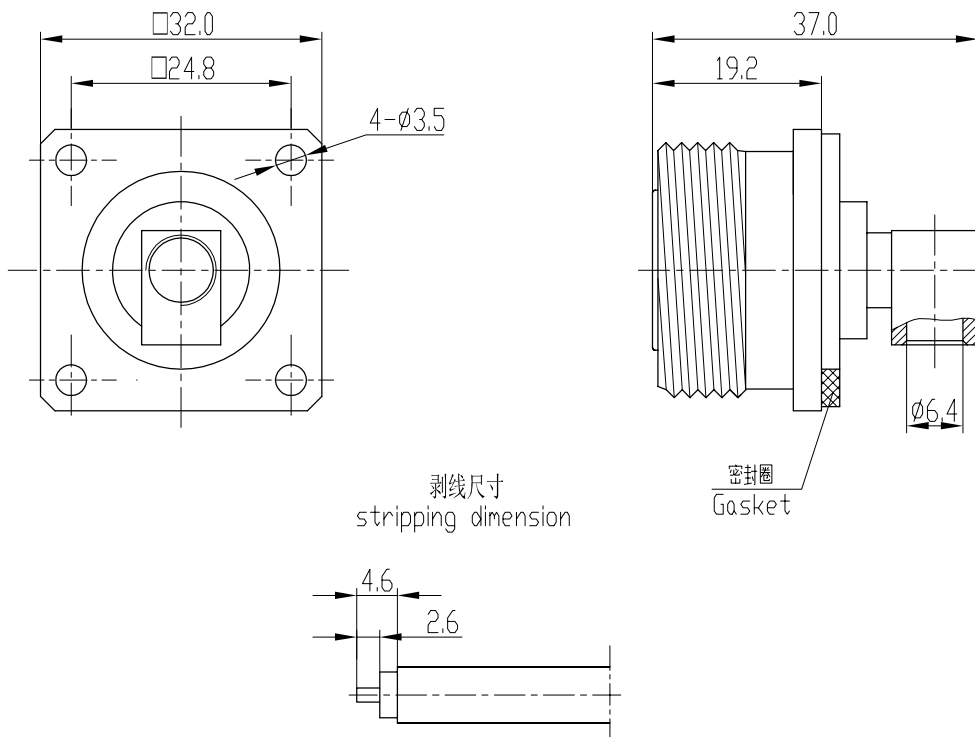

产品型号 type	配接电缆 cable type	备注 remark
L29-KFWB5A	VSC-250D、SMT680-250	壳体:黄铜,镀三元合金 body:brass,SUCO plated
L29-KFWB5A-1		壳体:黄铜,镀银 body:brass,silver plated

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 1.0 \text{ m}\Omega$
Out conductor: $\leq 0.5 \text{ m}\Omega$
- Insulation resistance: $\geq 10000 \text{ M}\Omega$
- Insulator withstanding: 4000V
- VSWR: ≤ 1.5
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 1.0 \text{ m}\Omega$
外导体: $\leq 0.5 \text{ m}\Omega$
- 绝缘电阻: $\geq 10000 \text{ M}\Omega$
- 介质耐压: 4000V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

Application: IEC 60169-4


执行标准: IEC 60169-4

Material&Finishing

- Center contact :
Female: phosphor bronze, silver plated
- Bodies: see the table above
- Insulators: PTFE
- Gasket: silicone rubber

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀银
- 壳体: 见上面表格
- 绝缘子: 聚四氟乙烯
- 密封圈: 硅橡胶

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1:2:1		
		NAME	DATE	L29-KFWB5A RF COAXIAL CONNECTOR 西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.
DRAWN				
CHECKED				
APPROVED				