


剥线尺寸
stripping dimensions

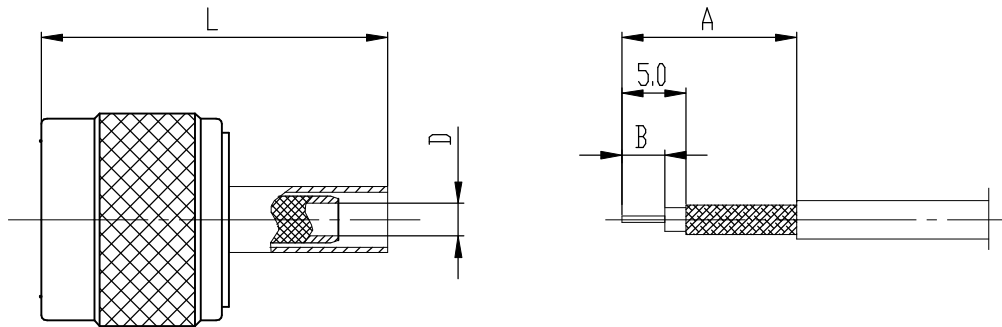

产品型号 type	A	B	D	L	电缆型号 cable type
N-J4Y	16.5	4.0	∅2.3	32.7	SFF-50-2-1
N-J5Y	15.6	3.5	∅3.1	32.7	SFF-50-3-1、SYV-50-3、RG141A/U
N-J5YA	15.6	3.5	∅3.1	32.7	SFF-50-3-2、RG142B/U、RG223/U

Electrical Characteristics:

- Characteristic Impedance: 50Ω
 - Frequency range: DC-6Ghz
 - Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.2\text{ m}\Omega$
 - Insulation resistance: $\geq 5000\text{ M}\Omega$
 - Insulator withstanding: 1500V
 - VSWR: ≤ 1.5
 - Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact :
Male: brass, gold plated
- Bodies: brass, nickel plated
- Insulators: PTFE
- Crimp ferrule: copper, nickel plated
- Gasket: silicone rubber


主要性能指标:

- 特性阻抗: 50Ω
- 频率范围: DC-6Ghz
- 接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.2\text{ m}\Omega$
- 绝缘电阻: $\geq 5000\text{ M}\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯
- 线夹: 黄铜, 镀镍
- 密封圈: 硅橡胶

5. Gasket: Silicone Rubber				5. 密封圈: 硅橡胶			
		SCALE		N-J4Y		UNLESS OTHERWISE SPECIFIED	
		1.5:1		N-J5Y		DIMENSIONS ARE mm, TOLERANCES ARE	
				N-J5YA		FRACTIONS DECIMALS ANGLES	
		NAME		RF COAXIAL CONNECTOR		.X± .15 ±1°	
DRAWN						.XX± .05	
CHECKED						.XXX±	
APPROVED							

西安富士达科技股份有限公司

XI'AN FORSTAR S&T CO.,LTD.