


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

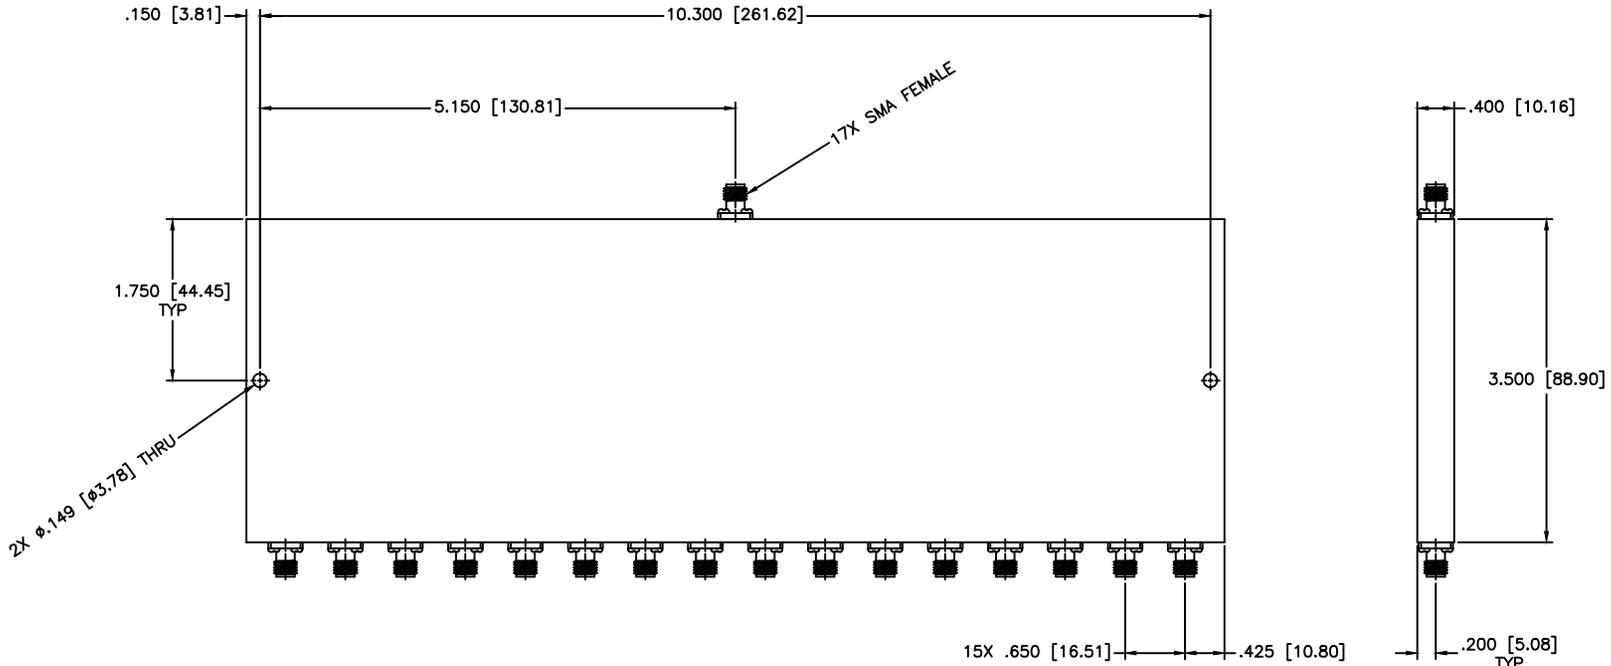

SPECIFICATIONS	
Frequency Range:	0.8–2.15 GHz
VSWR:	1.35:1 Max.
Amplitude Balance:	$\pm$ 1dB Max.
Phase Balance:	$\pm$ 4Deg. Max.
Insertion Loss:	2.5dB Max.
Isolation:	16dB Min.
Input Power:	30W (Load vswr @ 1.2)

MATERIAL:	DRAWING DATE:	DATE:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8110 http://www.MCLI.com		SCALE:	N/A
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm$ 1/64 DECIMALS: $\pm$ .01 $\pm$ .005 ANGLE: $\pm$ 1/2°	DRAWING TITLE:		16-WAY POWER DIVIDER
DRAWING BY: POI BOON LUEKHAMHAN	DATE: 03-08-2002	DATE: 03-08-2002	PART NO.: PS16-58-5	CAGE CODE: OD2L5		SIZE: N/A	REV: N/A
APPROVED: T. NGUYEN		DO NOT SCALE THE DRAWING	DWG NO.: 82948		DO NOT SCALE THE DRAWING		