



# 50 Ohm SMA Isolator Operating From 18 GHz to 26.5 GHz And 1 Watts With 17 dB Isolation

## TECHNICAL DATA SHEET

PE8306

#### Configuration

Connector 1 Connector 2 Frequency Range Design SMA Female SMA Female 18 GHz to 26.5 GHz Isolator

#### Electrical Specifications (Values at 25°C, sea level)

Minimum	Typical	Maximum	Units
18		26.5	GHz
	50		Ohms
		0.6	dB
		1	Watts
		1	Watts
		1.4:1	
17			dB
	18	18 50	18 26.5 50 0.6 1 1 1 1.4:1

#### **Mechanical Specifications**

**Temperature** 

Operating Range -54 to 85 deg C

Size

 Length
 1.26 in [32 mm]

 Width
 0.87 in [22.1 mm]

 Height
 0.5 in [12.7 mm]

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes
REACH Compliant 06/18/2012

### **Plotted and Other Data**

Notes:

· Values at 25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm SMA Isolator Operating From 18 GHz to 26.5 GHz And 1 Watts With 17 dB Isolation PE8306

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

ISO 9001 : 2008 Registered






## 50 Ohm SMA Isolator Operating From 18 GHz to 26.5 GHz And 1 Watts With 17 dB Isolation

## TECHNICAL DATA SHEET

PE8306

#### **Outline Drawing**

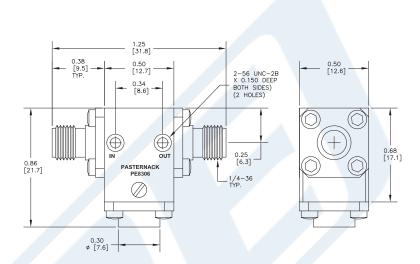

50 Ohm SMA Isolator Operating From 18 GHz to 26.5 GHz And 1 Watts With 17 dB Isolation from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm SMA Isolator Operating From 18 GHz to 26.5 GHz And 1 Watts With 17 dB Isolation PE8306

URL: http://www.pasternack.com/50-ohm-sma-isolator-18000-mhz-26500-mhz-20-watts-17-db-pe8306-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8306 REV 1.0

