

D

D

C

C

B

B

A

A



4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

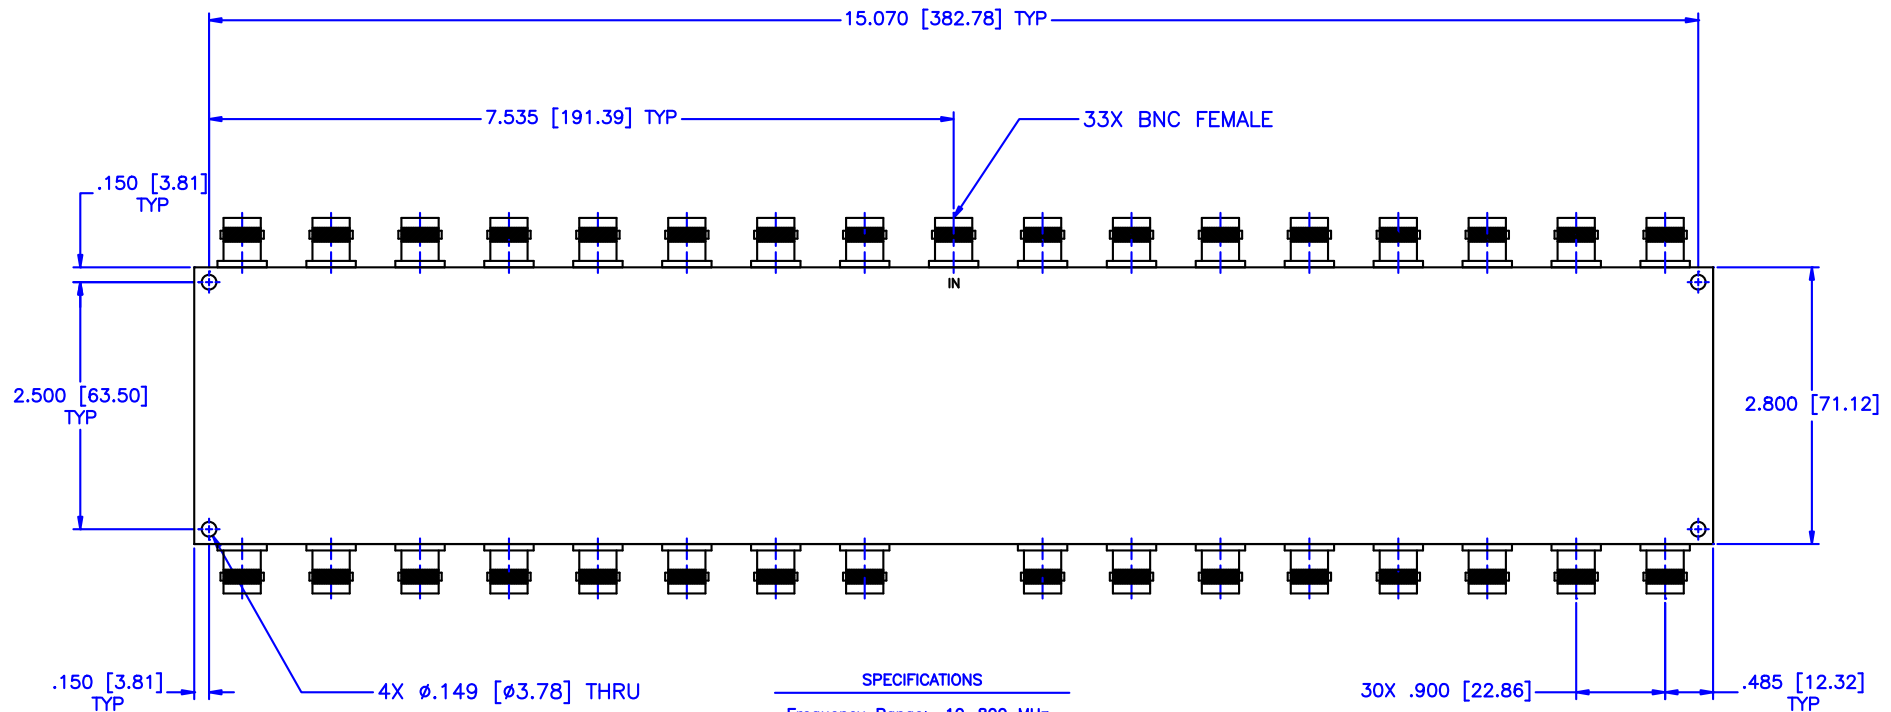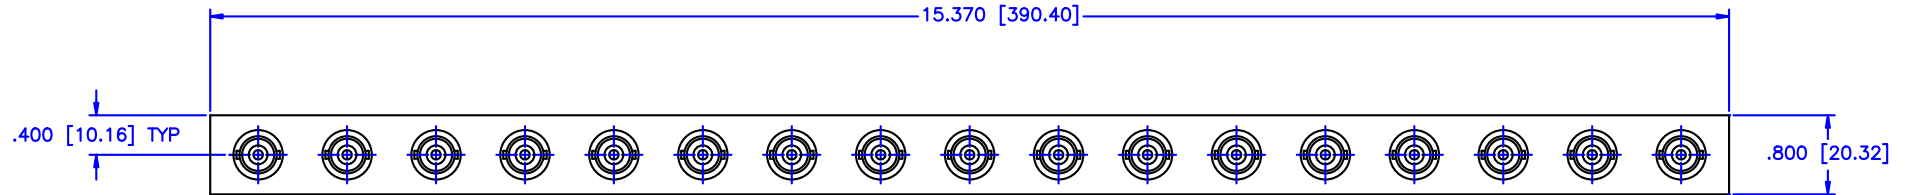

SPECIFICATIONS

Frequency Range: 10–800 MHz
Isolation: 16dB Min.
Insertion Loss: 6.5dB Max.
VSWR Input/Output: 1.55:1/1.50:1 Max.
Amplitude Balance: ± 1.5 dB Max.
Phase Balance: $\pm 12^\circ$ Max.
Impedance: 75 Ohm
Input Power: 1 Watt Max.

DRAWN		MCL/		MCL/		MCL/		MCL/	
Paloon Luethamhan		07-28-2012		07-28-2012		07-28-2012		07-28-2012	
T. Nguyen		07-28-2012		07-28-2012		07-28-2012		07-28-2012	
UNLESS OTHERWISE SPECIFIED:		TOLERANCES:		DIMENSIONS:		MATERIALS:		FINISHES:	
IN (INCHES) OR (mm) (MILLIMETERS)		FRACTIONS: $\pm 1/16$		DECIMALS: ± 0.01 ± 0.005		ANGLES: $\pm 1/2^\circ$		SURFACE FINISH:	
32-WAY LUMPED ELEMENT POWER DIVIDER		PL32-5E-75/BF		002L5		C		N/A	
DO NOT SCALE THE DRAWING		86144							