


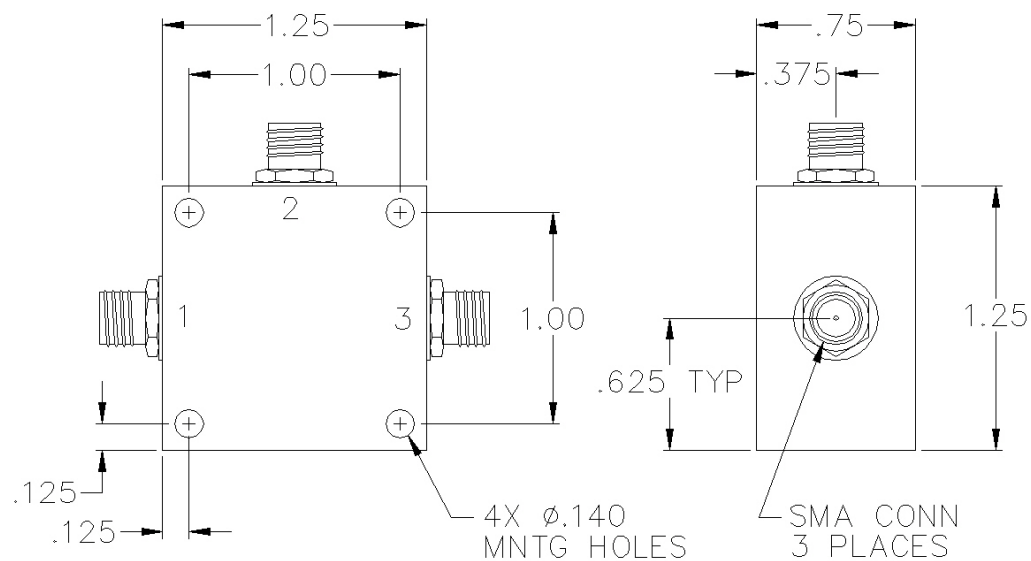

## SPECIFICATIONS

|                        |                |
|------------------------|----------------|
| Frequency Range:       | 100 - 6000 MHz |
| Isolation:             | 30 dB Min      |
| Insertion Loss:        | 1.5 dB Max     |
| Current <sup>1</sup> : | 500 mA Max     |
| Power:                 | 1 Watt Max     |
| Voltage:               | 50 Vdc Max     |
| VSWR:                  | 1.50:1 Max     |

### Notes:

- Higher current and isolation requirements available.

## PIN-OUT TABLE

|                     |         |
|---------------------|---------|
| RF In (DC Blocked): | 1       |
| RF/DC Output:       | 3       |
| DC In (Bias):       | 2       |
| Ground:             | Housing |

**PULSAR** MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION  
48 INDUSTRIAL WEST, CLIFTON NJ 07012  
TEL: 973-779-6262 FAX: 973-779-2727  
WWW.PULSARMICROWAVE.COM

DESCRIPTION :

**Bias Tee**

MODEL NO. :

**BT-07-411**

DIMENSIONS ARE IN INCHES  
DECIMAL TOLERANCE:  
2 PLACE  $\pm .02$   
3 PLACE  $\pm .010$

SIZE  
**A**

CAGE CODE :  
**0HR85**

REV CODE :

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO  
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1