




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

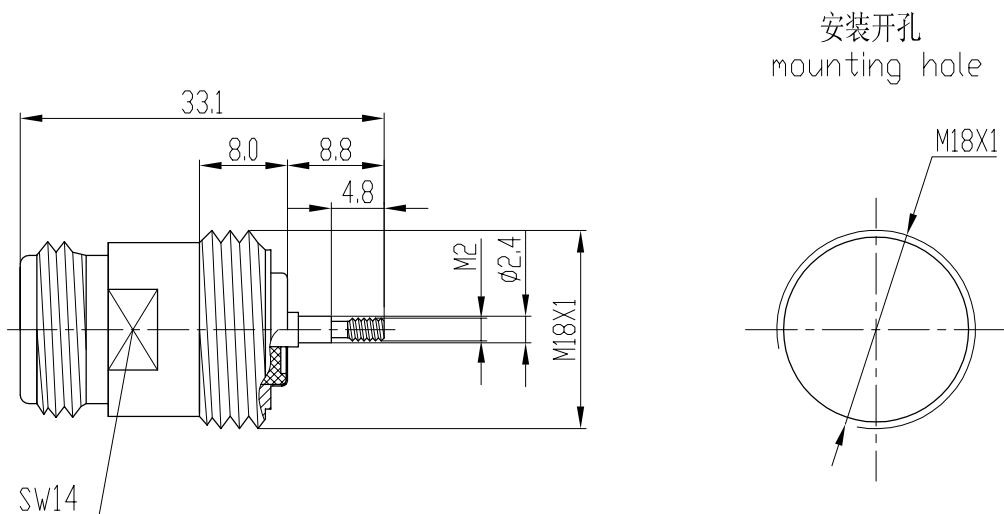

产品型号 type	备注 remark
N-KYD8	
N-KYD8G	body:stainless steel,passivation(不锈钢,钝化)

Electrical Characteristics:

- 1.Characteristic Impedance: 50Ω
- 2.Frequency range: DC~11Ghz
- 3.Contact resistance
Center conductor: ≤1.0 mΩ
Out conductor: ≤0.2 mΩ
- 4.Insulation resistance: ≥5000MΩ
- 5.Insulator withstanding:1500V
- 6.Durability: 500cycles

主要性能指标:

- 1.特性阻抗: 50Ω
- 2.频率范围: DC~11Ghz
- 3.接触电阻:
中心导体: ≤1.0 mΩ
外导体: ≤0.2 mΩ
- 4.绝缘电阻: ≥5000MΩ
- 5.介质耐压:1500V
- 6.插拔次数: 500次

Application:MIL-C-39012/1E

执行标准:MIL-C-39012/1E

Material&Finishing

- 1.Center contact :
Female:phosphor bronze,gold plated
- 2.Body:brass,nickel plated
- 3.Insulators:PTFE

材料和镀层

- 1.中心接触件:
插孔:锡磷青铜,镀金
- 2.壳体:黄铜,镀镍
- 3.绝缘子:聚四氟乙烯

	SCALE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	1.5:1	
NAME DATE		N-KYD8 RF COAXIAL CONNECTOR
DRAWN		
CHECKED		
APPROVED		
西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.		