


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

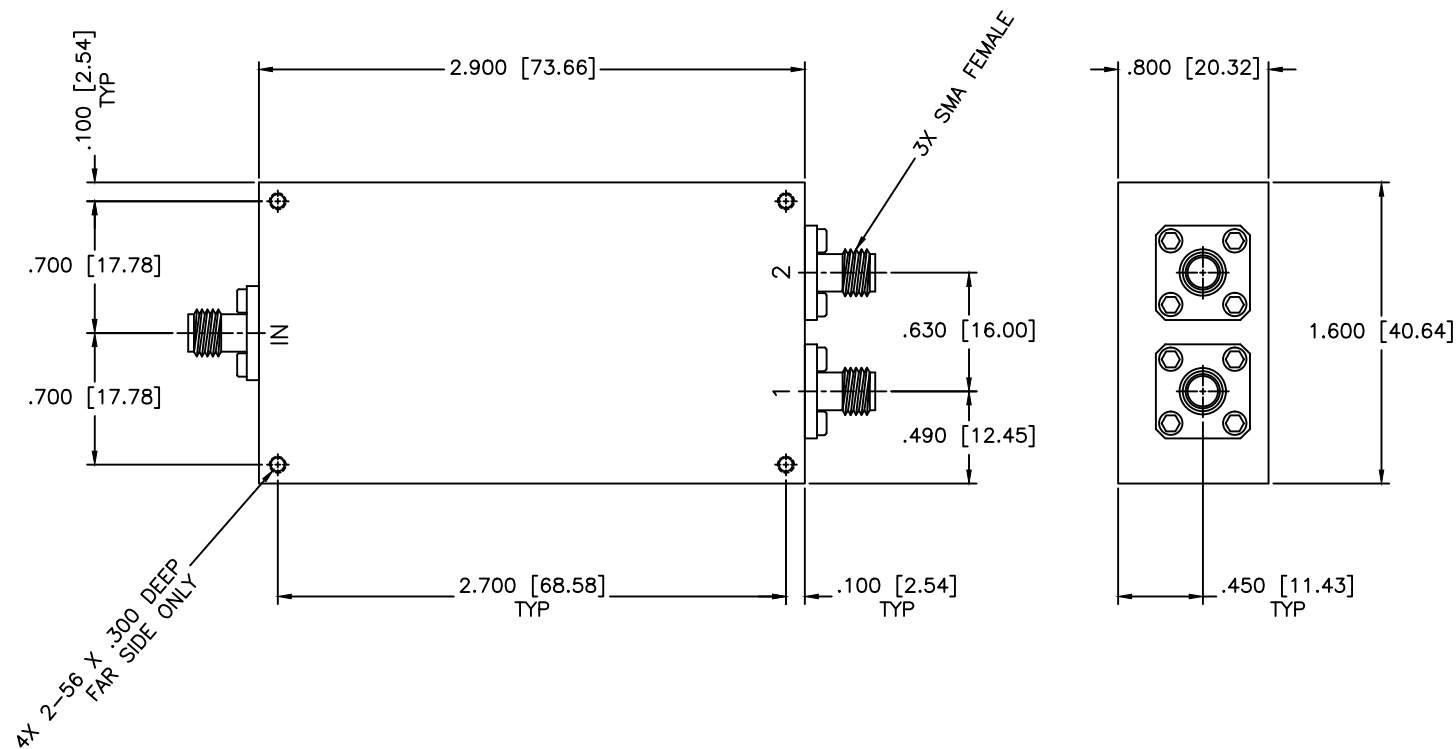

SPECIFICATIONS

Frequency Range: 20–2000 MHz
Insertion Loss: 1.2dB Max.
Isolation: 15dB Min.
Phase Balance: ± 5 Deg. Max.
Amplitude Balance: ± 0.3 dB Max.
VSWR: 1.70:1 Max.
Input Power: 5 W CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6118 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
DRAWING TITLE:		2-WAY POWER DIVIDER			
PART NO.		PLH2-52			
CAGE CODE:		SIZE: A	REV: N/A	DWG NO. 85297	
DO NOT SCALE THE DRAWING					

DRAWN: Paiboon Luekhamhan	DATE: 02-01-2011	APPROVED: T. Nguyen	DATE: 02-01-2011
---------------------------	------------------	---------------------	------------------

THIRD ANGLE PROJECTION