



MRFSP6725 2-WAY SMT SPLITTER



Features

- Frequency Range 5 to 1600 MHz
- Low Cost and RoHS Compliant
- Small SMT package
- Available in Tape-and-Reel
- 75 Ω Characteristic Impedance

Applications

- Broadband/CATV
- Wireless



Product Description

The MRFSP6725 2-way Splitter is designed for applications that require small, low cost, and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems. These units are built Lead-Free and RoHS compliant. S-Parameters are available on request.

Specifications


Parameter	Minimum	Typical*	Maximum
Frequency Range (MHz)	5		1600
Insertion Loss (dB)		0.7	1.25
Isolation (dB)	23	25	
Return Loss (dB)	17	21	
Amplitude Balance (dB)		0.25	0.5
Phase Balance (Degrees)		2.0	5.0

* Typical data represents mid-band performance @ 25 C.

Absolute Maximum Ratings

Parameter	Maximum
RF Power	+33 dBm
Operating Temperature	-55 to +100 °C
Storage Temperature	-55 to +100 °C


Schematic

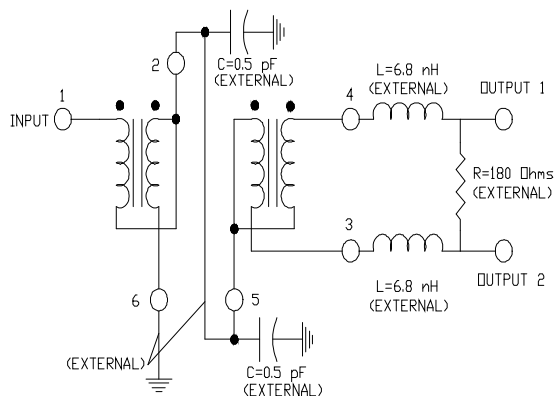

MiniRF Incorporated

2010 Crow Canyon Place
Suite 100
San Ramon, CA 94583






Tel. 408 228-3533
www.minirf.com



MiniRF

MRFSP6725 2-WAY SMT SPLITTER

Typical Data

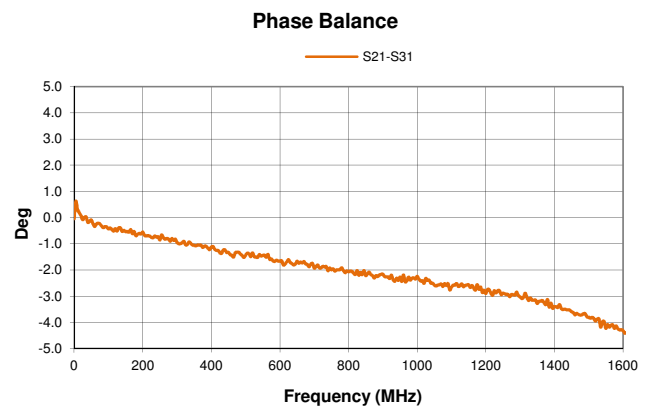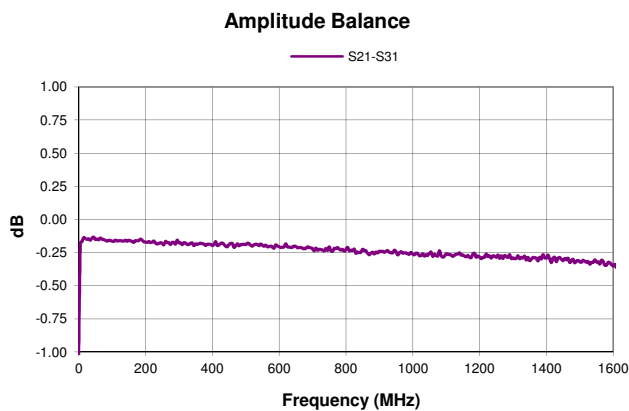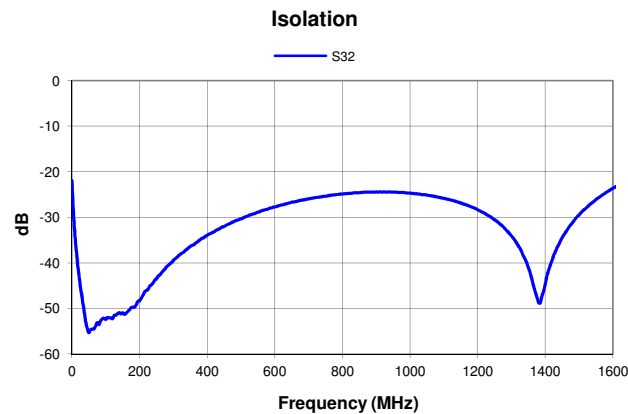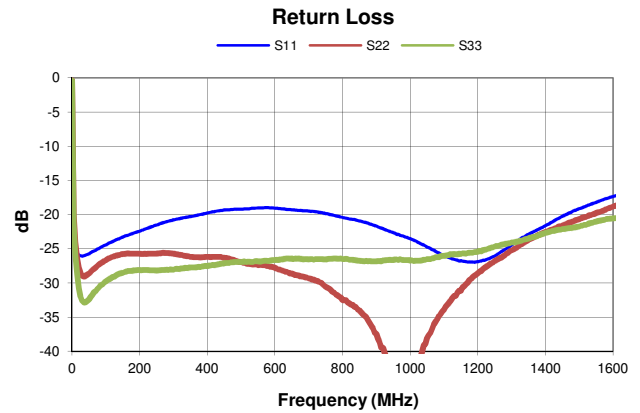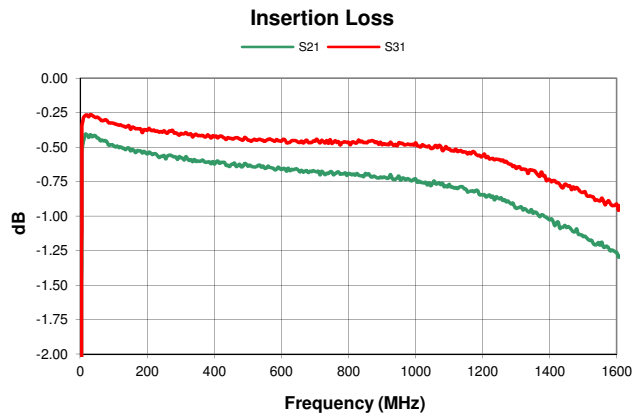

MiniRF Incorporated

2010 Crow Canyon Place
Suite 100
San Ramon, CA 94583

Tel. 408 228-3533
www.minirf.com




MRFSP6725 2-WAY SMT SPLITTER


Pin Out

Pin	Function
1	INPUT
2	C2
3	OUTPUT 1, R1
4	OUTPUT 2, R1
5	C1
6	GROUND


Package S19

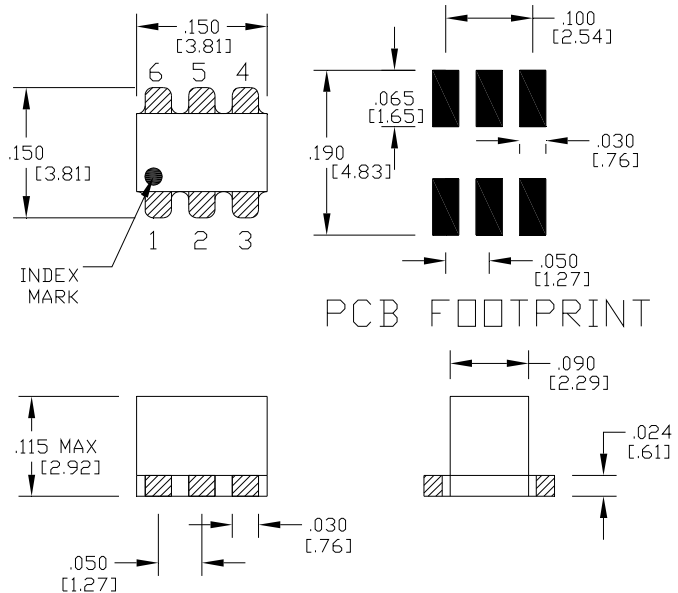

Test Footprint





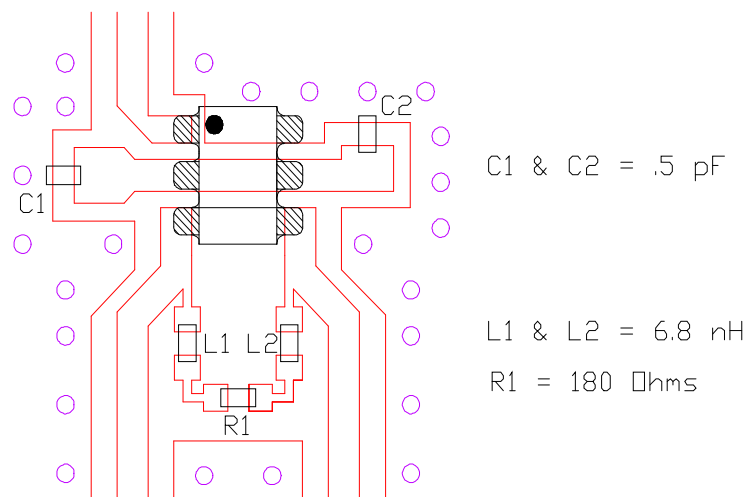


MiniRF Incorporated



MiniRF

MRFSP6725 2-WAY SMT SPLITTER

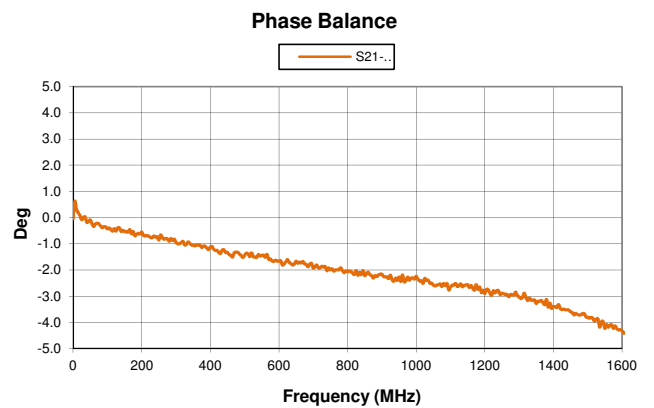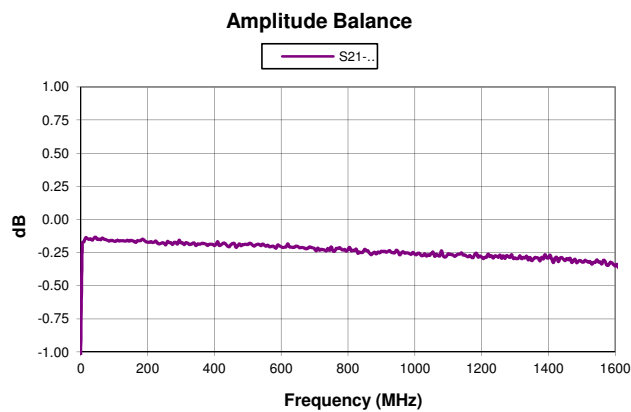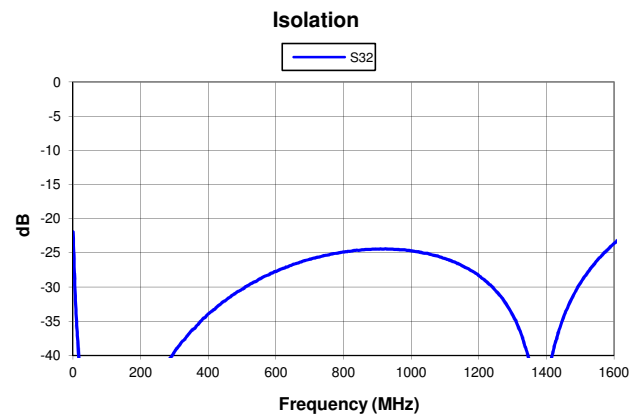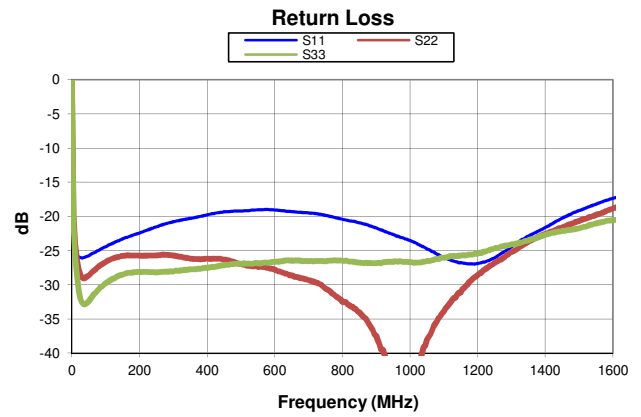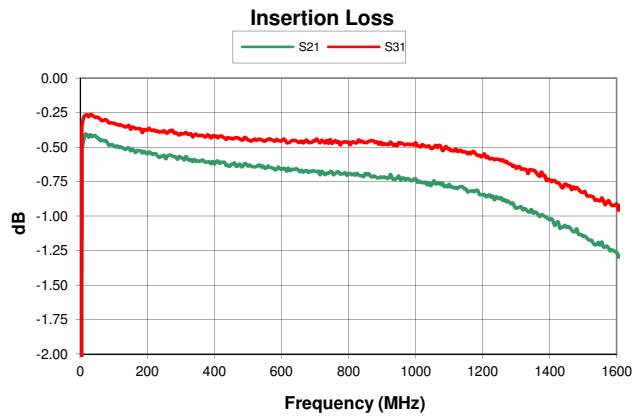

MiniRF Incorporated

2010 Crow Canyon Place
Suite 100
San Ramon, CA 94583

Tel. 408 228-3533
www.minirf.com