


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

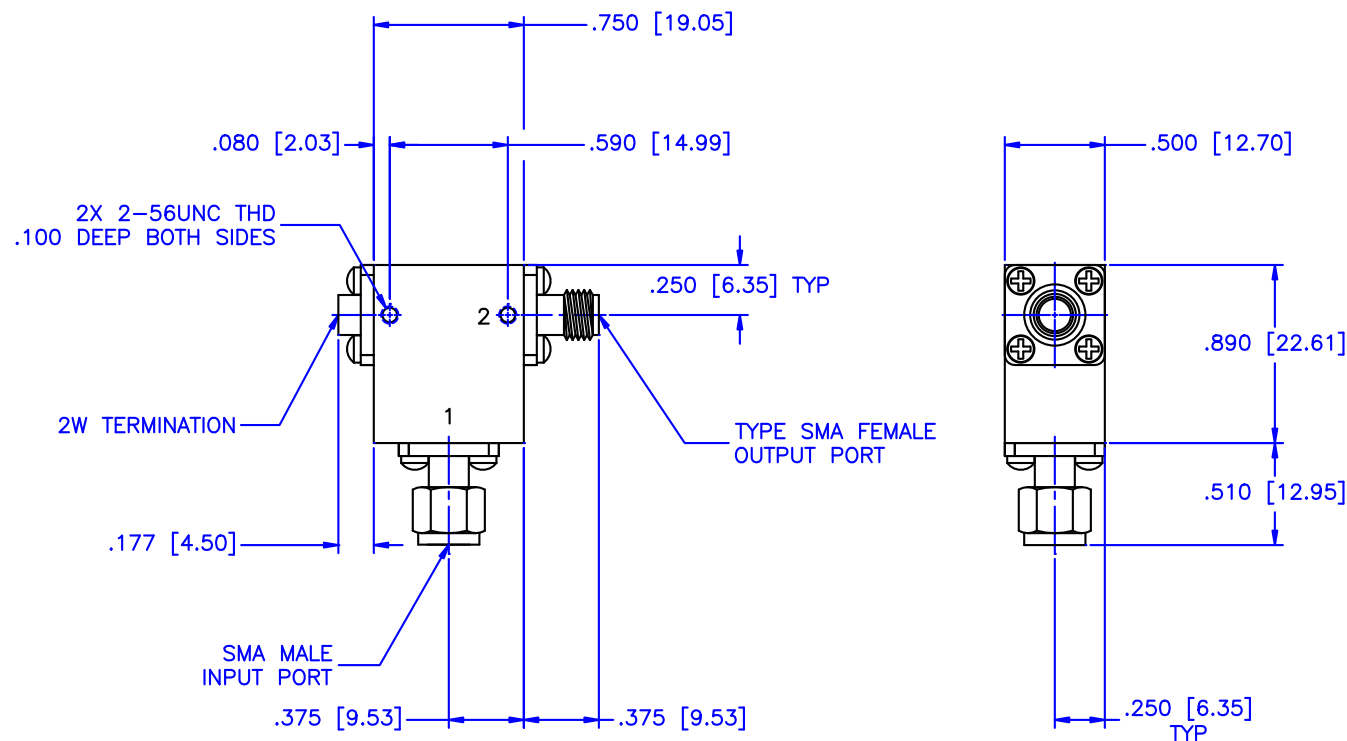

SPECIFICATIONS

Frequency Range: 3.9–4.6 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.4dB Max.
 VSWR: 1.25:1 Max.
 Power Avg, Peak: 2W, 100W
 Operating Temperature: –54°C to +95°C

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE: COAXIAL ISOLATOR 2 WATTS		PART NO. IS-76/S		
DRAWN: Paiboon Luekhmahan	DATE: 04-28-2008	CAGE CODE: 0D2L5	SIZE: N/A	REV: N/A
APPROVED: T. Nguyen	DATE: 04-28-2008	DO NOT SCALE THE DRAWING	DWG NO. 83838	