
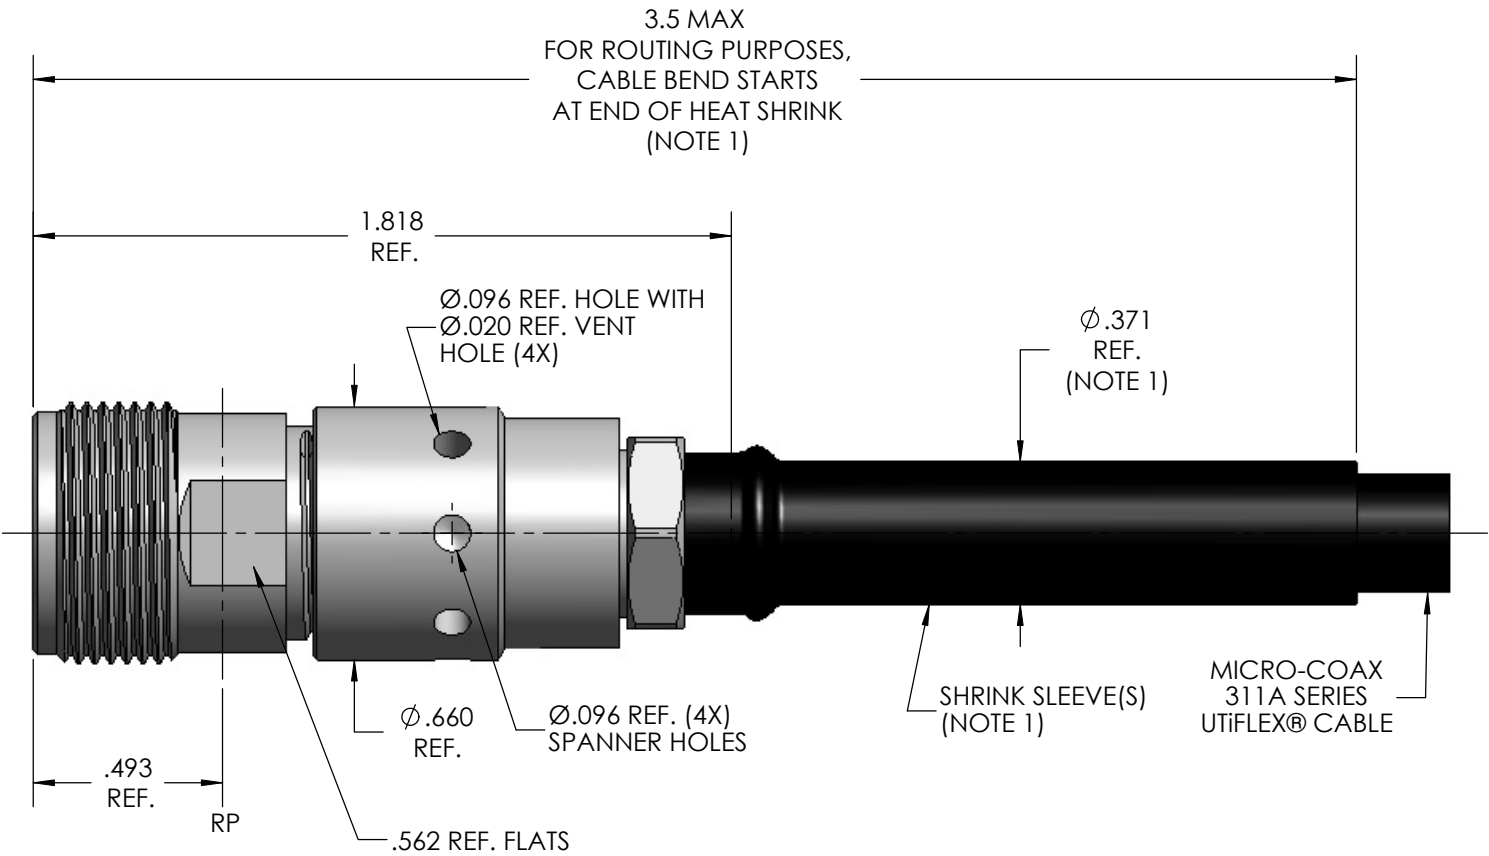


MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 309-2
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	MIL-PRF-39012/36 REF.
RECOMMENDED MATING TORQUE	10-15 IN-LBS. NOM.
CENTER CONTACT INSERTION FORCE (INTERFACE)	6 IN-LBS. MAX.
CENTER CONTACT WITHDRAW FORCE (INTERFACE)	6 IN-LBS. MAX.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	3 LBS. MAX.
AXIAL CONTACT RETENTION (FROM CABLE)	3 LBS. MIN.
CABLE RETENTION	30 LBS. MIN.
MASS	43.13 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	9 GHz
VSWR DC - 9 GHz	1.16:1MAX.
INSERTION LOSS	0.045 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1800 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 9 GHz	-90 dB MIN.
CORONA	460 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	1200 Vrms MIN.
CONTACT RESISTANCE (INNER)	1.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	0.2 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-100 °C TO 150 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION B
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
CONTACT & CONTACT RING	BERYLLIUM COPPER PER ASTM-B-196, GOLD PLATE PER MIL-DTL- 45204, OVER NICKEL PLATE PER AMS-QQ-N-290.
DIELECTRIC BEAD	POLYETHERETHERKETONE, PER MIL-P-45183, TYPE 1
INSULATORS	TFE FLUOROCARBON PER ASTM-D-1710
BODIES & CLAMP NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
APPLICATION	
CABLE(S)	311A
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL

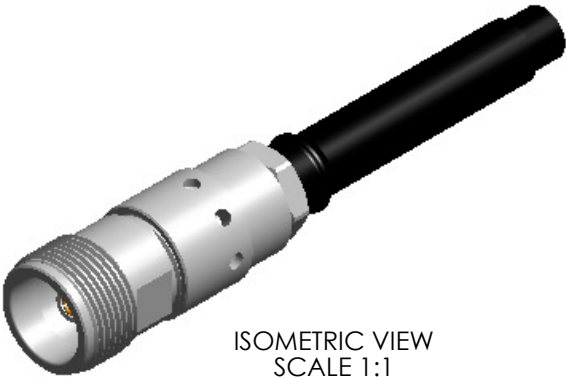

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.
2. ALL SPECIFICATIONS LISTED ON THIS DRAWING WILL ALSO APPLY TO CONNECTOR 905244-EM (EQUIPMENT MODEL).

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE - ECO 125614	11/19/2012	MJM	RS
B	ECO 135083	2/14/2013	MJM	RS
C	ECO 135349	7/1/2013	MJM	RS

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.	INITIALS		DATE		<div>MICRO-COAX<<<PROVEN RELIABLE</div>							
	DWN.	MJM	11/19/12									
	CHKD.	CCF	11/20/12									
	APPVD.											
TOLERANCES UNLESS OTHERWISE SPECIFIED			TITLE									
			SC JACK, VENT HOLES, 311A SERIES, SPACE GRADE									
.XX ± .02			ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.			FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.		REV
.XXX ± .005						64639	B	2:1	1 OF 1	SD905244		C
.XXXX ± .0010												
ANGLES ± 2°												