

50 Ohm 2 Way 2.92mm Resistive Power Divider
From DC to 26.5 GHz Rated at 1 Watts

TECHNICAL DATA SHEET

PE2083

50 Ohm 2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watts

Configuration

Input Connector	2.92mm Female
Output Connectors	2.92mm Female
Frequency Range, GHz	DC to 26.5
Design	Resistive
Number of Output Ports	2
Housing Material and Plating	Passivated Stainless Steel

Electrical Specifications

Frequency Range, GHz	DC to 26.5
Impedance, Ohms	50
Maximum Insertion Loss, dB	8.5
Maximum Input Power, Watts	1
Maximum Input VSWR	1.4:1
Phase Balance, Degrees	± 4
Flatness, dB	1

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +125
------------------------	-------------

Size

Length, in [mm]	1.16 [29.46]
Width, in [mm]	1.06 [26.92]
Height, in [mm]	0.375 [9.53]

Input Connector

Contact Material and Plating	Beryllium Copper, Gold
Connector Material and Plating	Passivated Stainless Steel
Body Material and Plating	Passivated Stainless Steel

Output Connectors

Contact Material and Plating	Beryllium Copper, Gold
Connector Material and Plating	Passivated Stainless Steel
Body Material and Plating	Passivated Stainless Steel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watts PE2083](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

50 Ohm 2 Way 2.92mm Resistive Power Divider
From DC to 26.5 GHz Rated at 1 Watts

TECHNICAL DATA SHEET

PE2083

Plotted and Other Data

Notes:

Values at 25 °C, sea level

50 Ohm 2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watts PE2083](#)

URL: <http://www.pasternack.com/2-way-2.92mm-power-divider-dc-26.5-ghz-1-watts-pe2083-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE2083 CAD Drawing

50 Ohm 2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watts

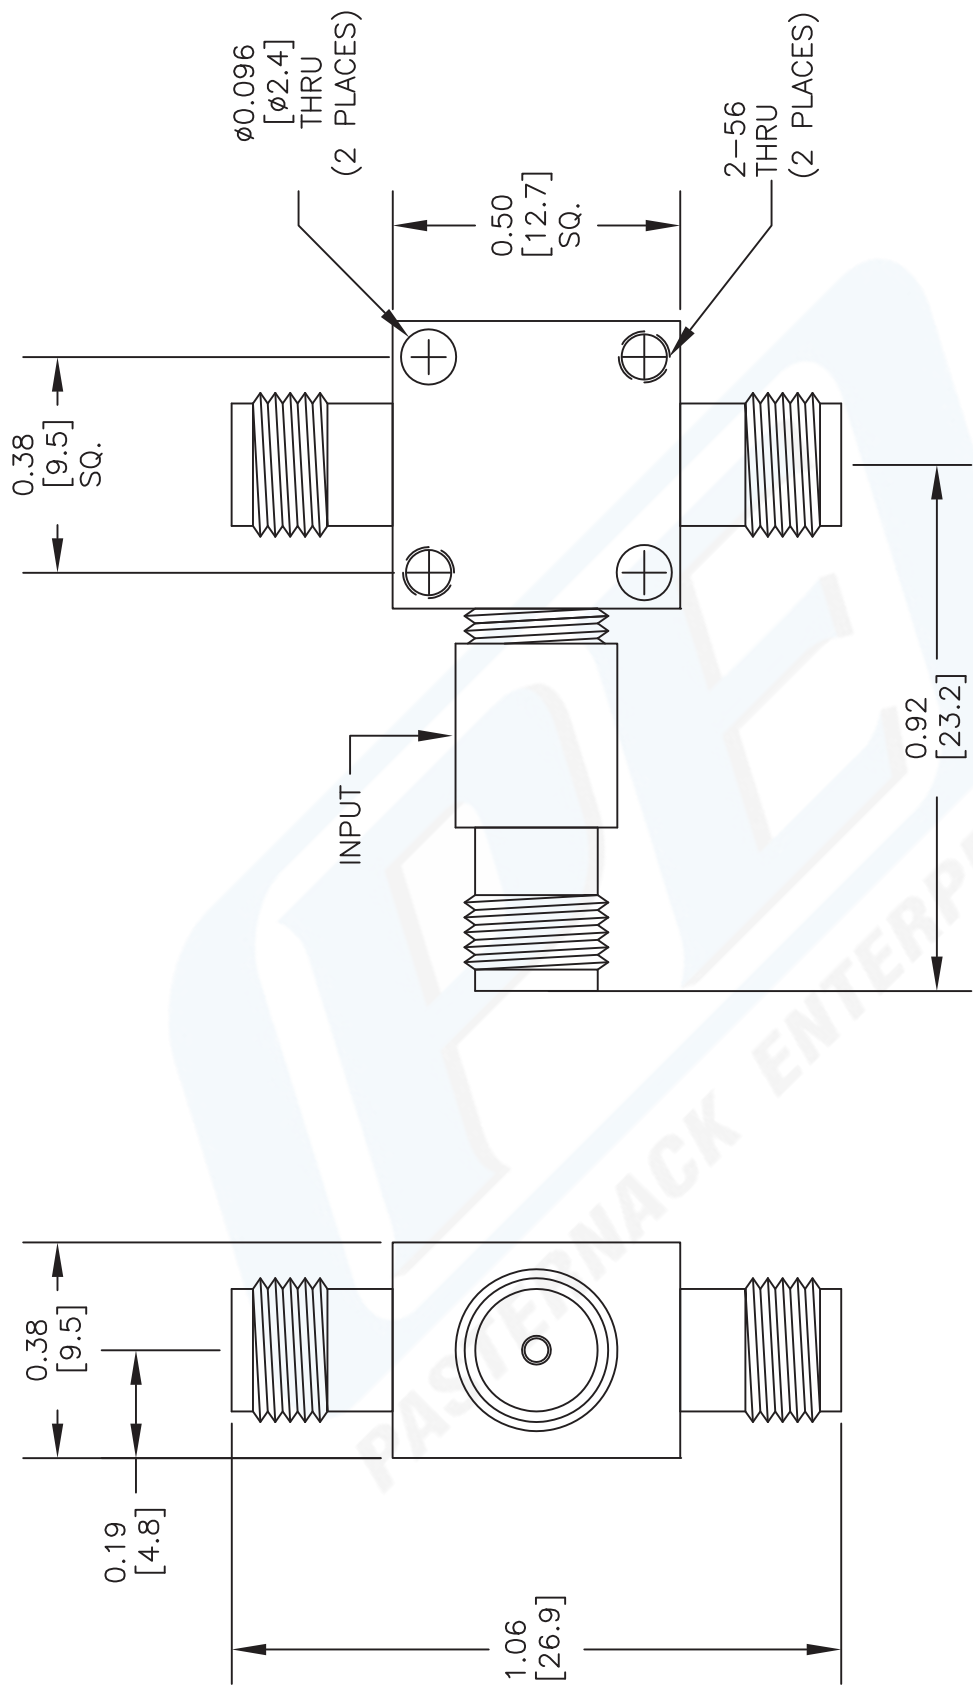

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE2083

FSCM NO. 53919

150

SIZE A

SCALE N/A

CAD FILE 100213

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com