


CAVITY BAND PASS FILTER 0.7163-0.71475GHz

Summary:



- Cavity Filter - Suspended Substrate Stripline Filter
 - Flat frequency response and low insertion loss..
 - Covers the 1 GHz to 18 GHz Frequency Range
- Wide bandwidth and 3 dB BW Available from 5-50% (f_0)
 - Designs that Cover up to 40 GHz Also Available
 - MIL-E-5400 standard

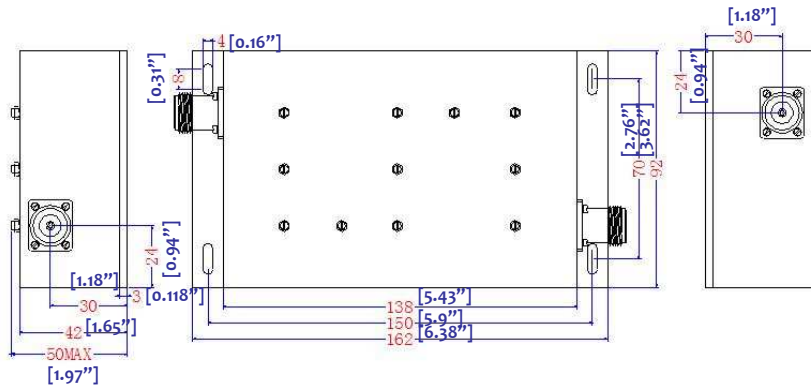

Environmental

Specifications:

Operational Temp. Range: -10°C~+55°C

Storage Temp. Range: -55°C~+100°C

Pass Band (GHz)	Insertion Loss (dB)	VSWR	Pass Band Ripple(dB)	Attenuation (dBc)	Connector	Power (W)
0.7163-0.71475	4.00	1.30	±1.0	30@DC- 714.75MHZ	N-F	50

