


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

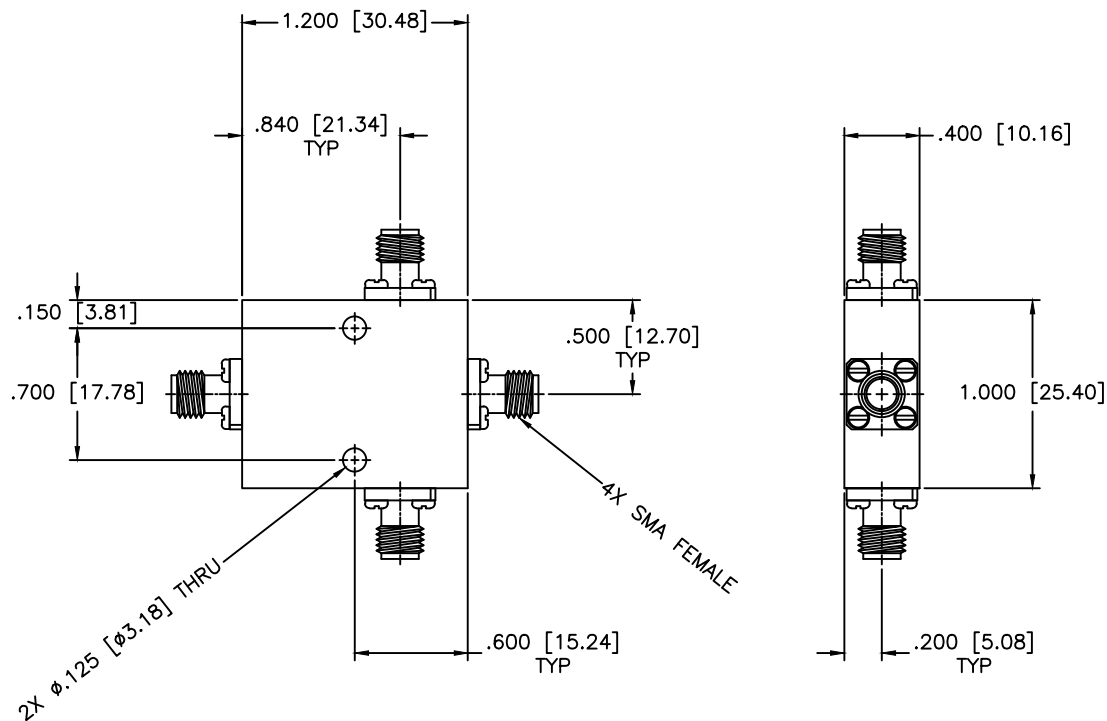

SPECIFICATIONS

Frequency Range: 14–14.5 GHz
 Insertion Loss: 1.2dB Max.
 Isolation: 16dB Min.
 VSWR In/Out: 1.60:1/1.50:1 Max.
 Phase Balance: ± 8 Deg. Max.
 Amplitude Balance: ± 0.5 dB Max.
 Power: 20W (Load vswr@1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		3-WAY POWER DIVIDER			
DRAWN: Paiboon Luekhamhan DATE: 06-08-1999 APPROVED: T. Nguyen DATE: 06-08-1999		PART NO.			
		PS3-26			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		CAGE CODE:	SIZE:	REV:	DWG NO.
		OD2L5	A	N/A	80094
		DO NOT SCALE THE DRAWING			