

Full C-band 8W BUC

MODEL No. NJT5761 series

< Features >

- * **Wide band Radio Frequency**
 - Frequency: 5.85 to 6.725 GHz
(Standard C-band & Palapa C-band)
- * **High Efficiency & Low Distortion**
 - P1dB: +39 dBm min. over temperature
 - IM3: -24 dBc @ Pout = +36 dBm
 - Power Consumption: 64 W
- * **Compact Size & Light Weight**
 - Weight: 3.2 kg
- * **AC Power Option**
- * **LED Indicator**
- * **RoHS Compliance**



< Line-up >

Model No.	RF Frequency	Local Frequency	IF Frequency	Output Power @ P1dB	IF Connector	Power Supply	Port for Voltage Input	LED Indicator
NJT5761N	5.85 to 6.725 GHz (Full C-band)	4.90 GHz	950 to 1,825 MHz	8W Linear (+39 dBm min.)	N-type	DC Power +24/+48 VDC (+18 to +60 VDC)	Same as IF Connector	Equipped
NJT5761F					F-type		MS Connector (Separate Port)	
NJT5761NM					N-type			
NJT5761FM					F-type	AC Power Option	IF Connector Supplied by AC PSU	
NJT5761NA					N-type			
NJT5761FA					F-type			

< Specifications >


Item	Specifications
Output Interface	Waveguide, CPR137 (with Groove)
Input Interface	N-type, female (50 ohm) [Model No.: NJT5763N/63NM/63NA] F-type, female (75 ohm) [Model No.: NJT5763F/63FM/63FA]
Output Power @ 1dB G.C.P.	+39 dBm min. over temperature
Linear Gain	63 dB nom., 57 dB min.
IM3	-24 dBc typ. @ total power = +39dBm - 3dB
Requirement for External Reference	[Frequency] 10 MHz (sine-wave)
	[Input Power] -5 to +5 dBm @ Input port
	[Phase Noise] -125 dBc/Hz max. @ 100 Hz -135 dBc/Hz max. @ 1 kHz -140 dBc/Hz max. @ 10 kHz
L.O. Phase Noise	-60 dBc/Hz max. @ 100 Hz
	-70 dBc/Hz max. @ 1 kHz
	-80 dBc/Hz max. @ 10 kHz
	-90 dBc/Hz max. @ 100 kHz
Receive Band Noise Density	-87 dB/4kHz max. @ 3.400 to 4.200 GHz
Input V.S.W.R.	2 : 1 max.
Output V.S.W.R.	2 : 1 max.
Power Requirement / Consumption	+24 / +48 VDC (+18 to +60 VDC) / 64 W typ., 70 W max.
	AC Power Option: 90 to 264 VAC at Indoor AC/DC PSU [Model No.: NJT5761NA/61FA]
Mute	Shut off the HPA in case of L.O. unlocked or no 10 MHz reference signal.
LED Indicator	Green: L.O. locked / RED: L.O. unlocked or no 10MHz reference signal
Port for Voltage Input	Same as IF Connector [Model No.: NJT5761N/61F]
	MS Connector (Separate Port) [Model No.: NJT5761NM/61FM]
	IF Connector supplied by AC/DC PSU via IF Cable [Model No.: NJT5761NA/61FA]
Temperature Range (ambient)	-40 to +55 C (operating) -40 to +75 C (storage)
Dimension & Housing (without Interface Connectors)	219.5 mm (L) x 175 mm (W) x 99 mm (H)
	[8.64" (L) x 6.89" (W) x 3.90" (H)]
Weight	3.2 kg [7.0 lbs]

*Note: The contents of this sheet are subject to change without notice.

(1/8)
Rev.02(April. 2014) Full C 8W BUC_NJT5761

< Outline Drawing >

N-type, female Connector Model / DC Input: IF Connector

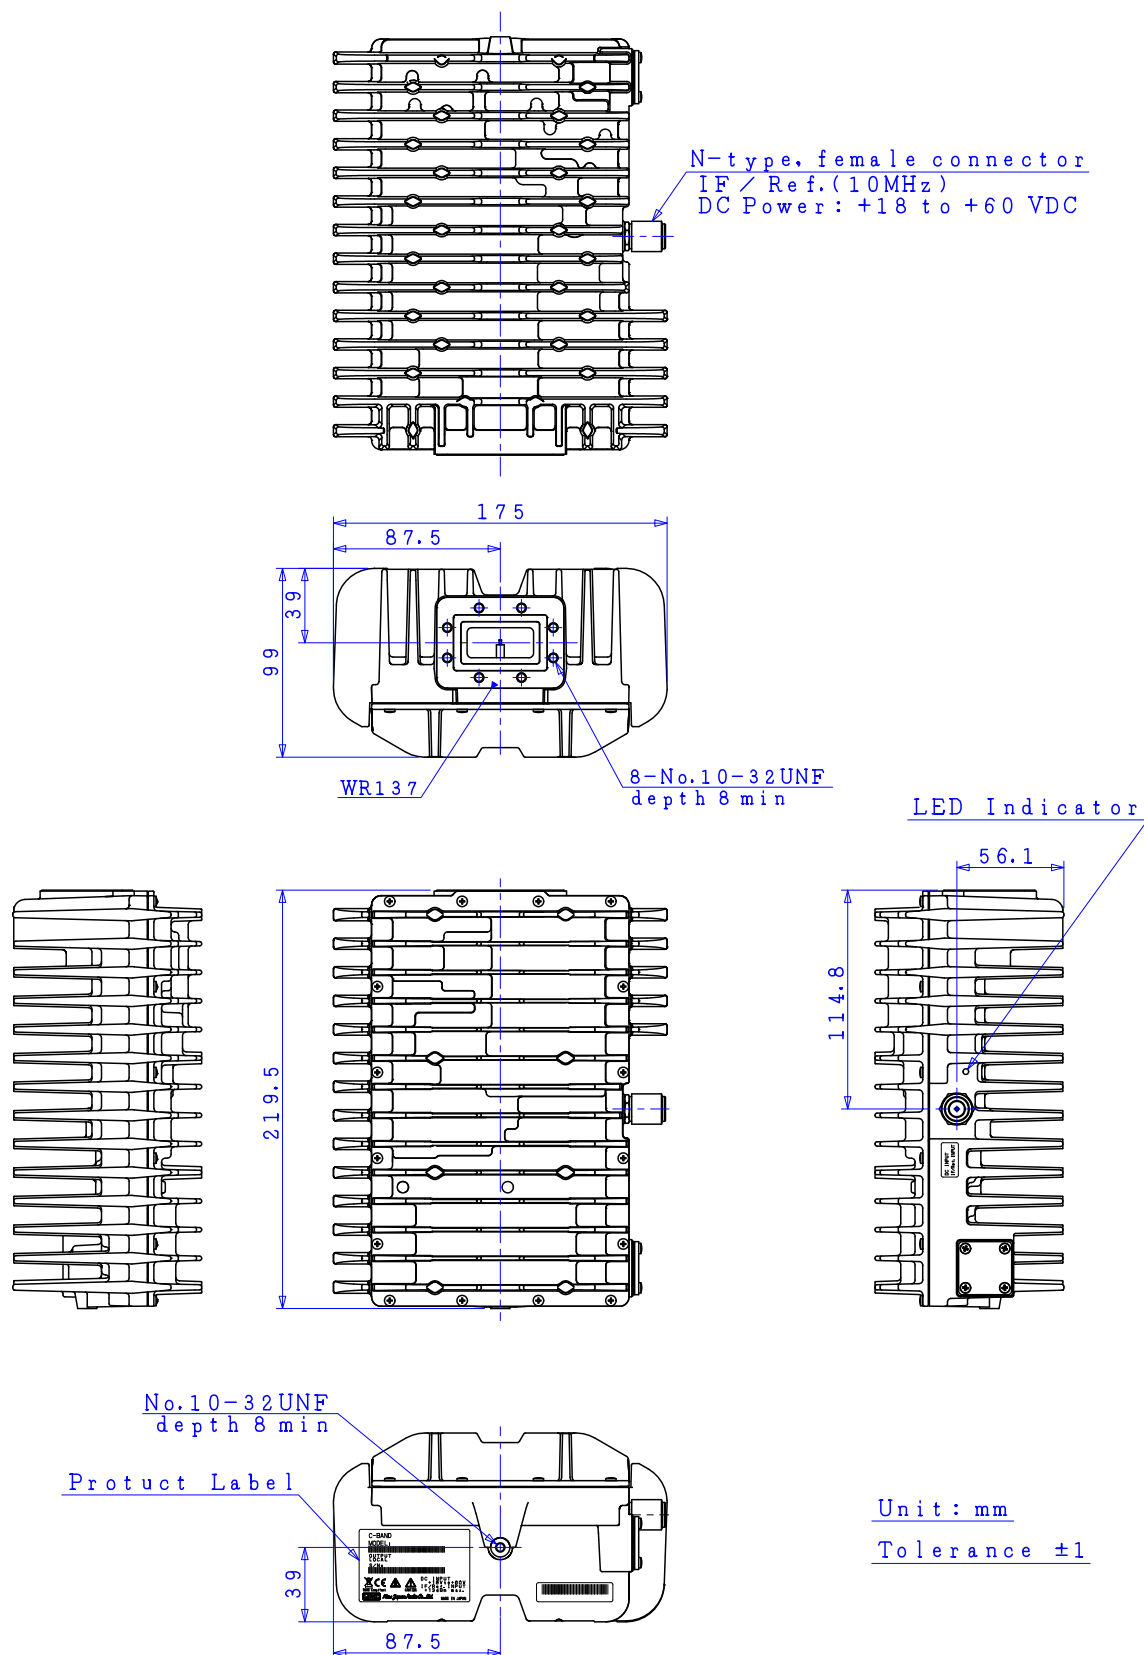


*Note: The contents of this sheet are subject to change without notice.

(2/8)
Rev.02(April. 2014) Full C 8W BUC_NJT5761

< **Outline Drawing** >

F-type, female Connector Model / DC Input: IF Connector

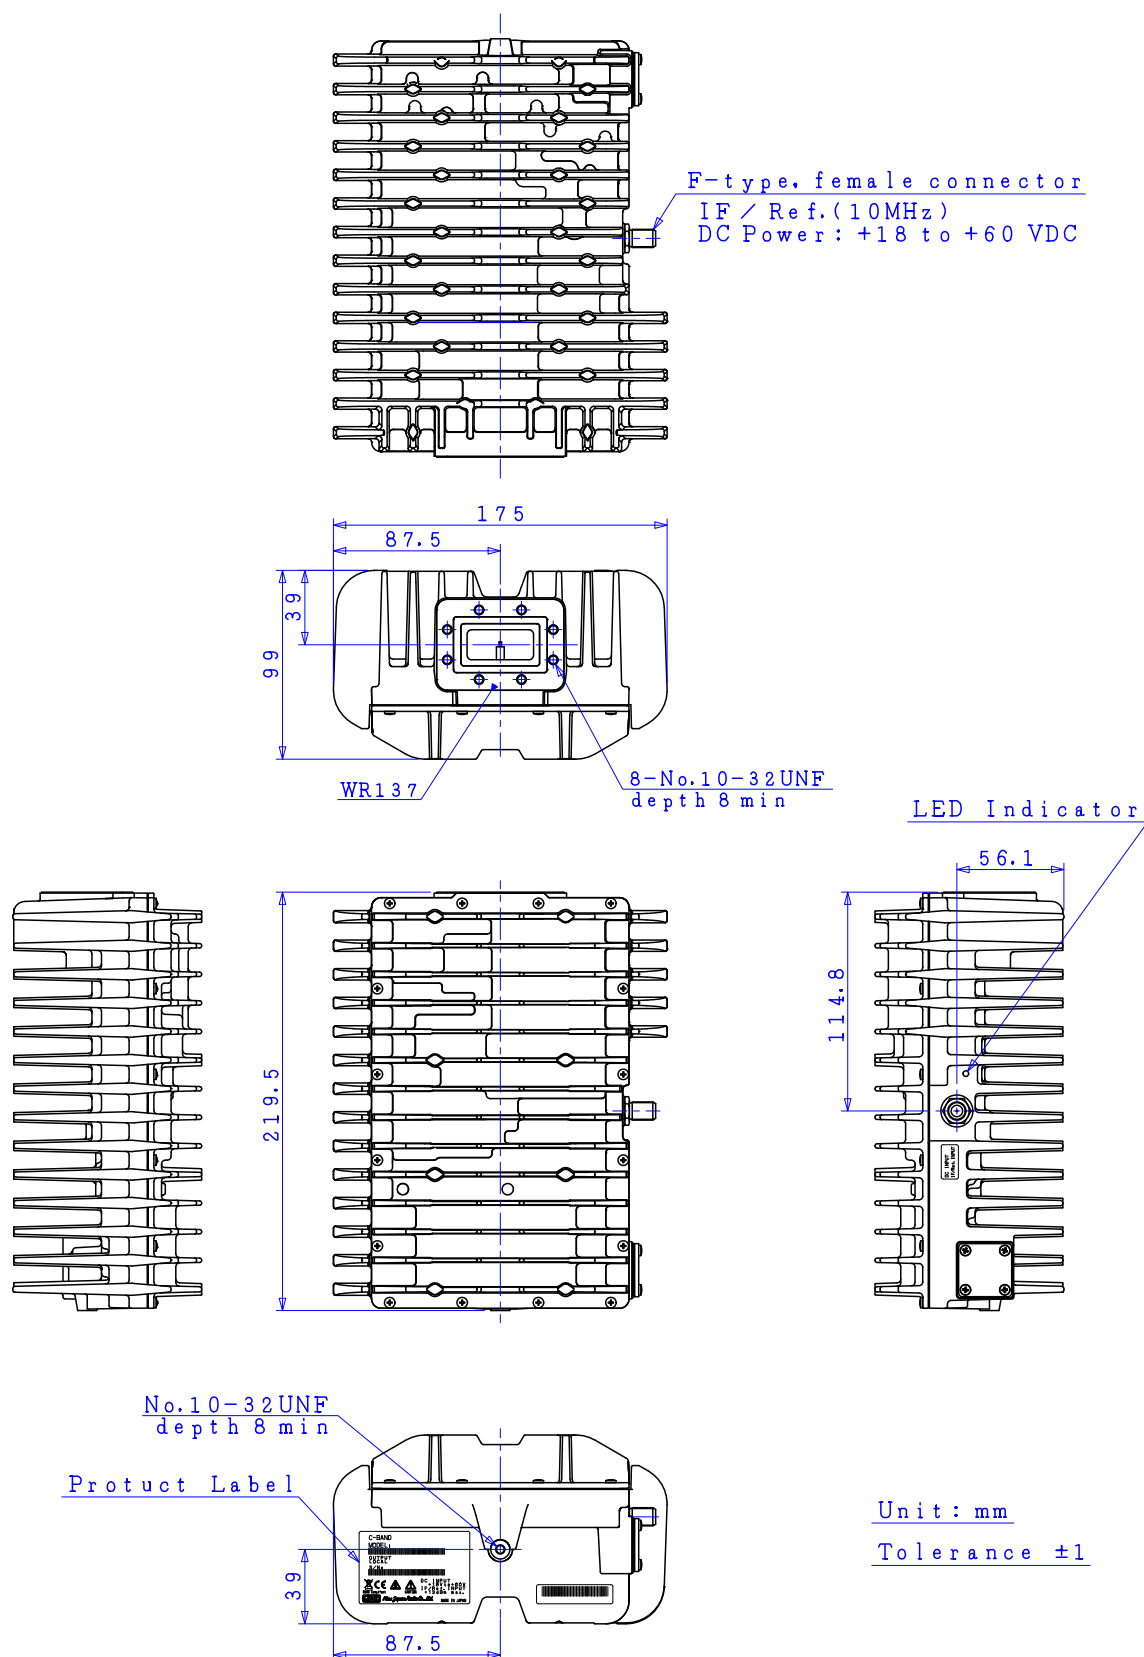


*Note: The contents of this sheet are subject to change without notice.

(3/8)
Rev.02(April. 2014) Full C 8W BUC_NJT5761

< **Outline Drawing** >

N-type, female Connector Model / DC Input: MS Connector

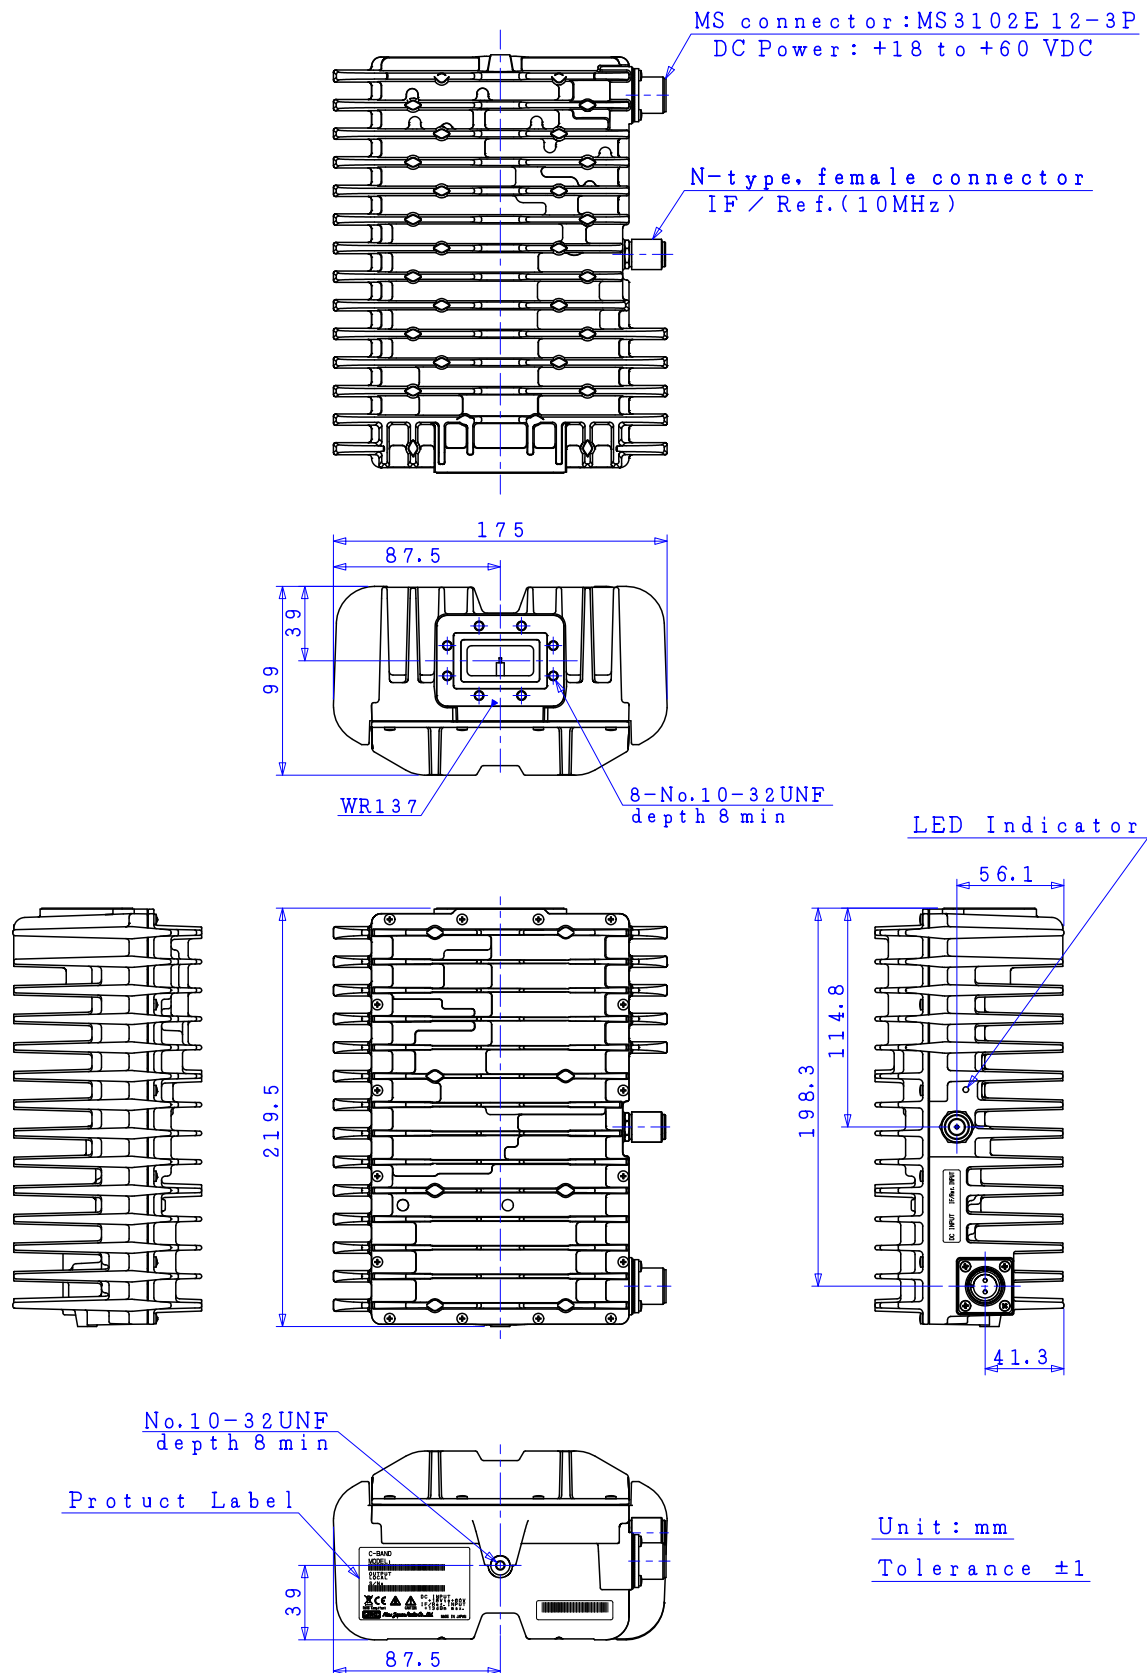


*Note: The contents of this sheet are subject to change without notice.

(4/8)
Rev.02(April. 2014) Full C 8W BUC_NJT5761

< **Outline Drawing** >

F-type, female Connector Model / DC Input: MS Connector

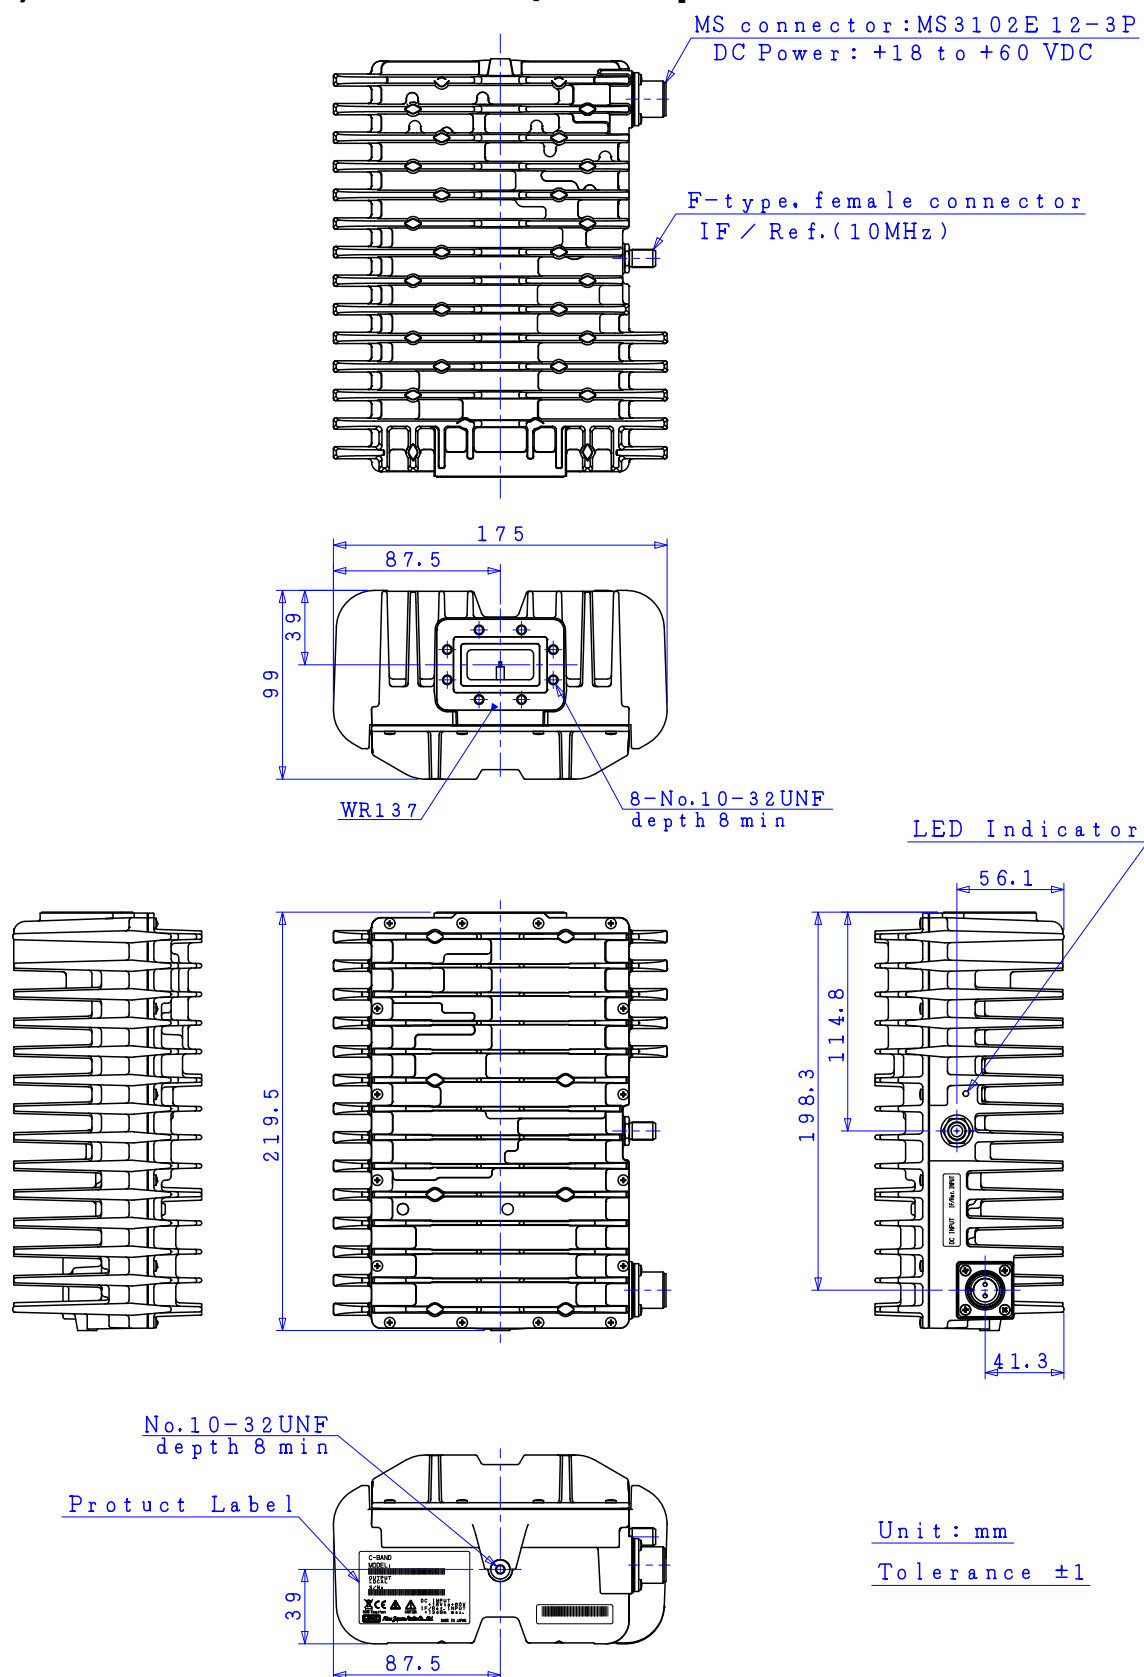

*Note: The contents of this sheet are subject to change without notice.


(5/8)
Rev.02(April. 2014) Full C 8W BUC_NJT5761

Full C-band 8W BUC

AC Power Option: Indoor 150W AC/DC Power Supply Unit (PSU)

< Overview of AC Power Option >

- Interface -

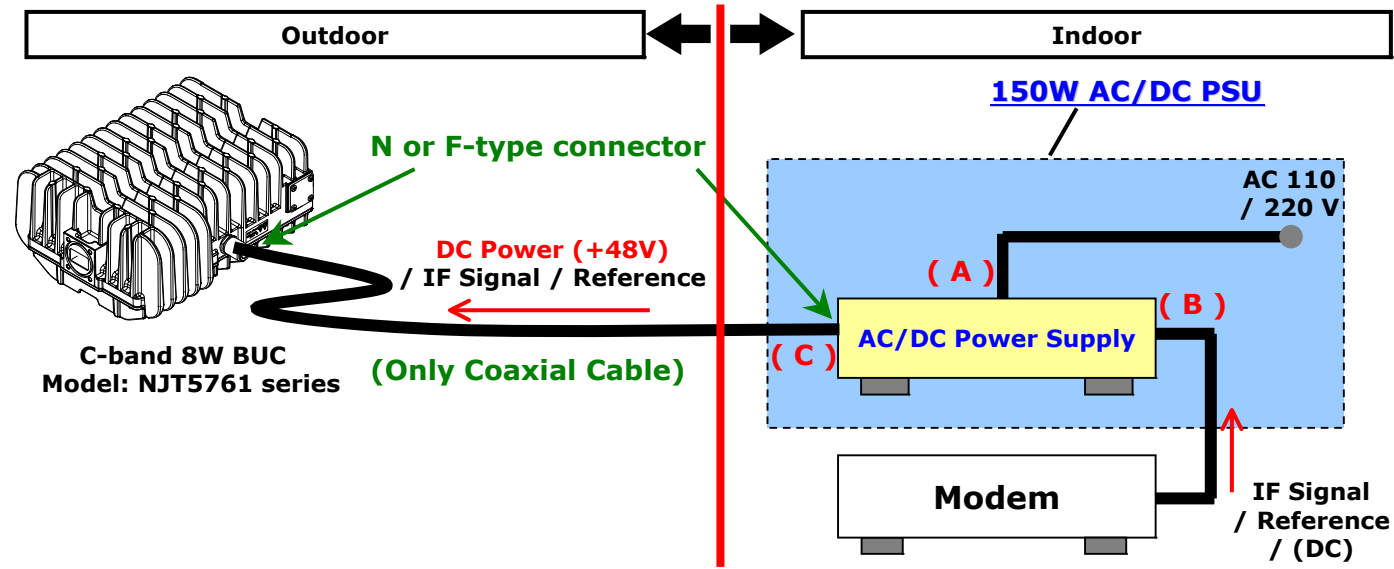

- 150W AC/DC PSU -

- * The features of 150W AC/DC Power Supply Unit (PSU) is to provide the stable +48V DC power to operate C-band 8W BUCs, even if inner power supply of the modem is not capable enough to operate these BUCs.
- * The AC/DC box, which is having enough power supply of 150W as well as having the bias-tee which enable to pass 10MHz reference signal and L-band IF signal from the modem, is operated by AC Power and enable to operate these BUCs.
- * In addition, the aluminum housing with corrosion-proof treatment on the surface is employed with the box to use perfectly as the indoor unit.



< Specifications >

Item	Specifications	
Interface	AC Input	IEC320-C14 inlet
	IF/Ref./ (DC) Input	N-type, female (50 ohm) / F-type, female (75 ohm)
	IF/Ref./DC Output	N-type, female (50 ohm) / F-type, female (75 ohm)
Input AC Voltage Range	Rated Range	100 to 240 VAC
	Absolute Maximum Rating	90 to 264 VAC
Input AC Frequency Range	50 / 60 Hz	
Output Voltage / Power	+48 VDC +/- 10 % / 150 W max.	
Efficiency	80 % typical at 120 VAC, full load	
Power Factor	0.98 typical at 120 VAC, full load	
IF Frequency	950 to 1,700 MHz	
IF Insertion Loss	1 dB max.	
IF Input/Output VSWR	1.5 : 1 max.	
Standard	EN55022, EN55024, EN60950-1, EN61000-3-2/3, EN62311	
Temperature Range (ambient)	0 to +50 C (operating), -30 to +85 C (storage)	
Cooling	Forced Air by Fan	
Dimension & Housing	290 mm (W) x 230 mm (D) x 44 mm (H)	
(without Interface Connectors / Switch)	[11.41" (W) x 9.06" (D) x 1.73" (H)]	
Weight (without Cable)	1.6 kg [3.5 lbs]	
Accessories	Coaxial cable of 1 m, AC power cable of 1 m, 1U rack mount kit (Option)	




*Note: The contents of this sheet are subject to change without notice.

■ Full C-band **8W** BUC

AC Power Option: **Indoor 150W AC/DC Power Supply Unit (PSU)**

< Outline Drawing >

N-type, female Connector Model (AC/DC PSU)

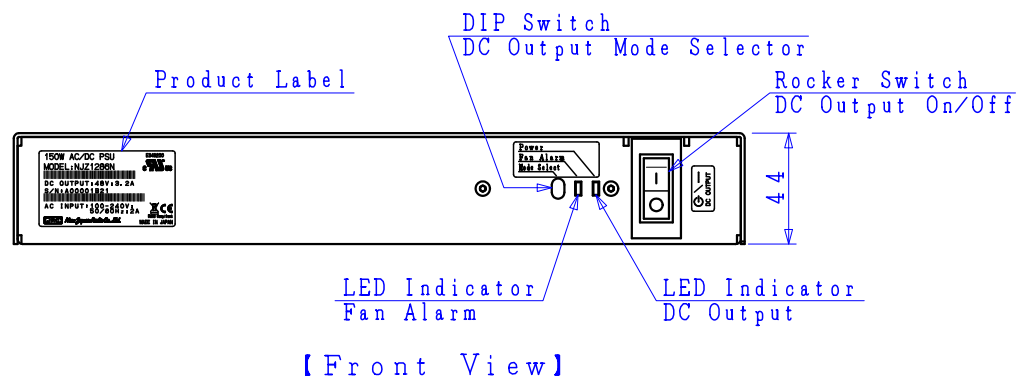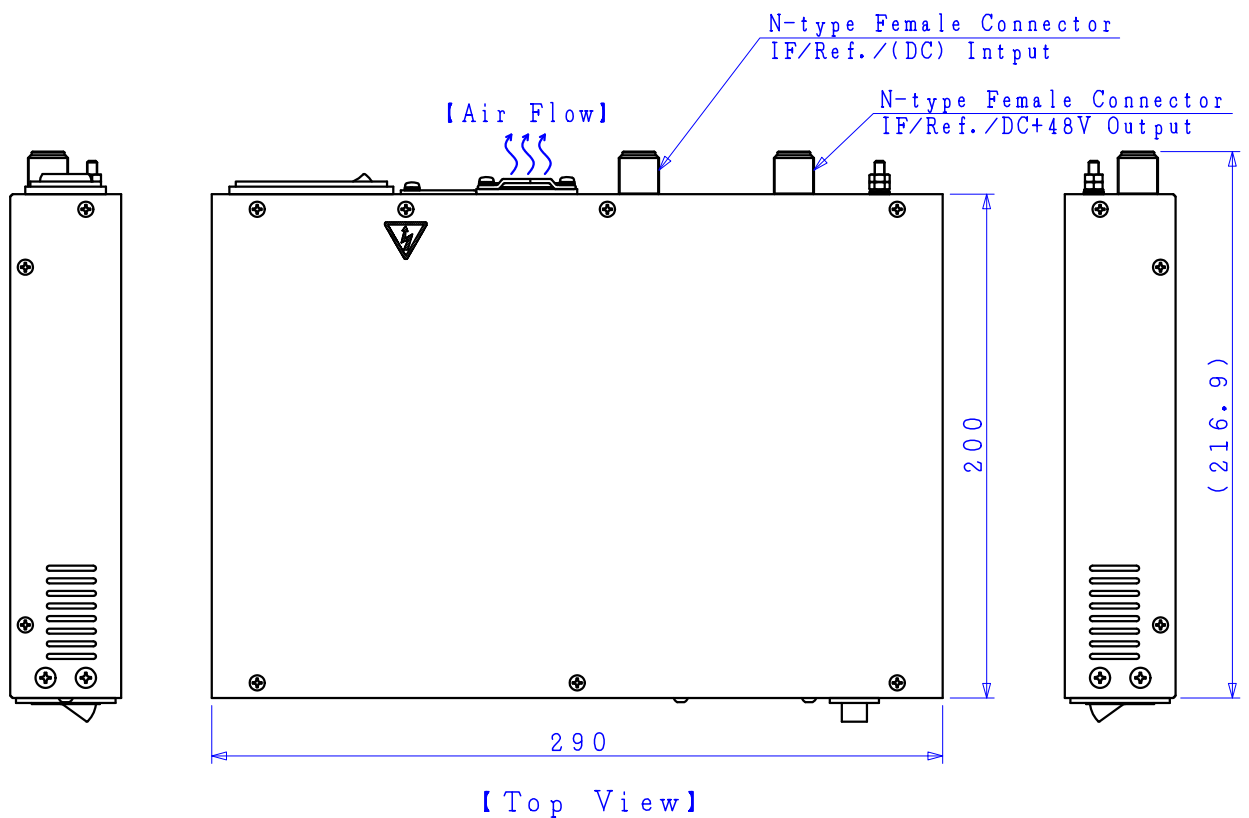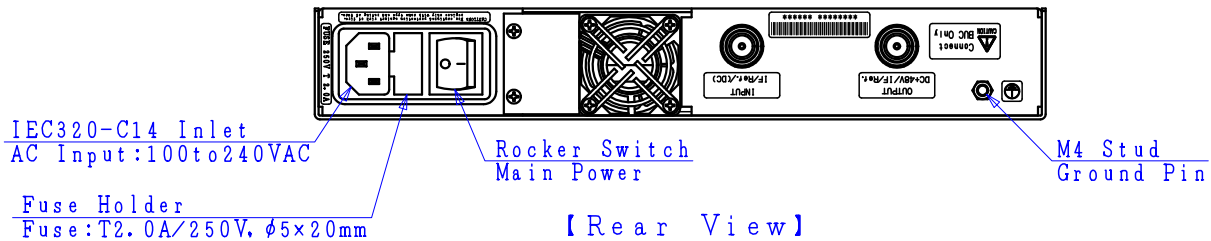

UNIT : mm

*Note: The contents of this sheet are subject to change without notice.




(7/8)
Rev.02(April. 2014) Full C 8W BUC_NJT5761

■ Full C-band **8W** BUC

AC Power Option: **Indoor 150W AC/DC Power Supply Unit (PSU)**

< Outline Drawing >

F-type, female Connector Model (AC/DC PSU)

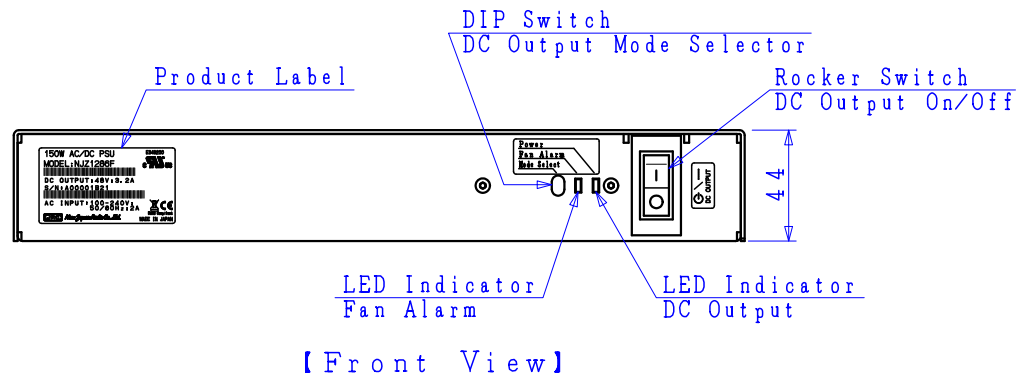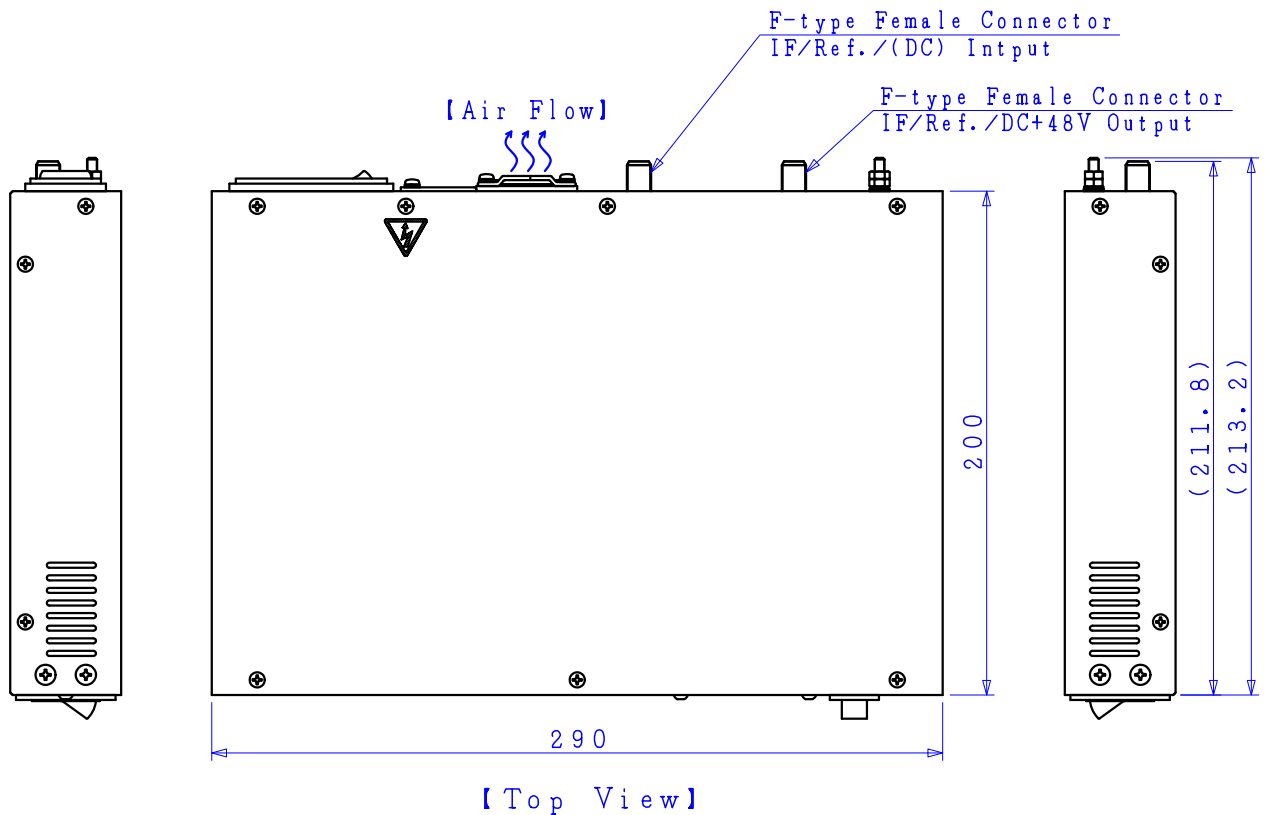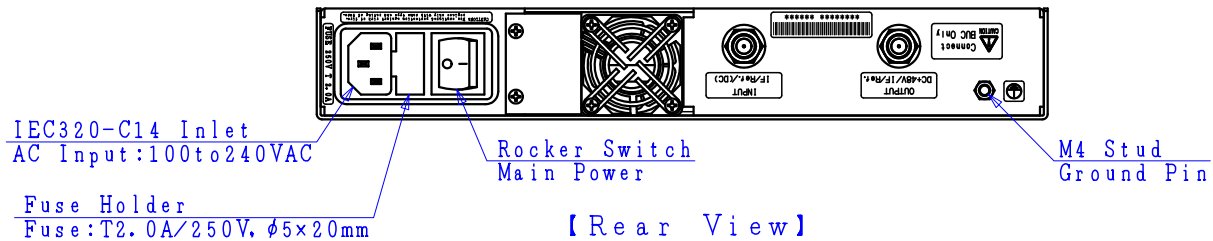

UNIT : mm

*Note: The contents of this sheet are subject to change without notice.

(8/8)
Rev.02(April. 2014) Full C 8W BUC_NJT5761