


# DNF2540-T0110

## 1.4 GHz to 1.601 GHz


DNF Drop-in ISOLATORS & CIRCULATORS

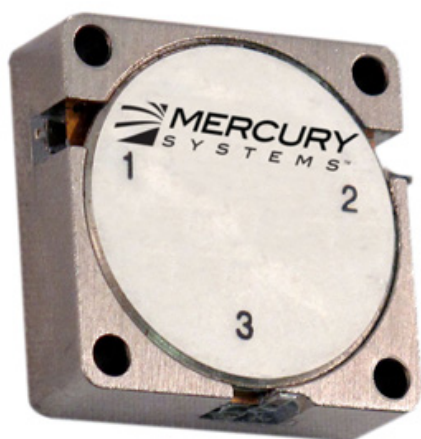

### Specifications



|                |                      |
|----------------|----------------------|
| RF Frequency   | 1.4 GHz to 1.601 GHz |
| Isolation      | 20 dB (min)          |
| Insertion Loss | 0.4 dB (max)         |
| VSWR           | 1.25:1               |
| Peak Power     | 1 Watts (max)        |
| Average Power  | 100 Watts (max)      |
| Package Size   | 1.00 x 1.00 x 0.30"  |

### Environmental Notes

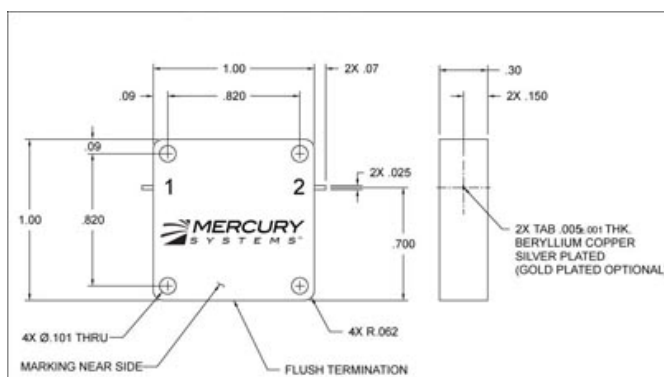

MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Manteca, CAL | 1-209-825-3977 | [rf.mrcy.com](http://rf.mrcy.com)  
 Specifications subject to change without notice

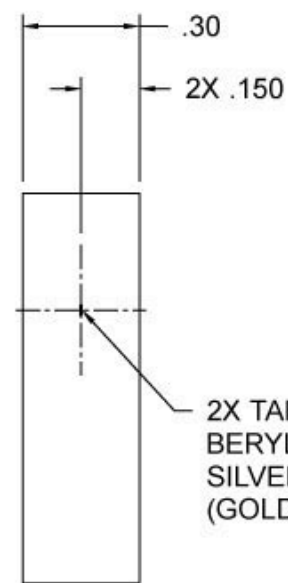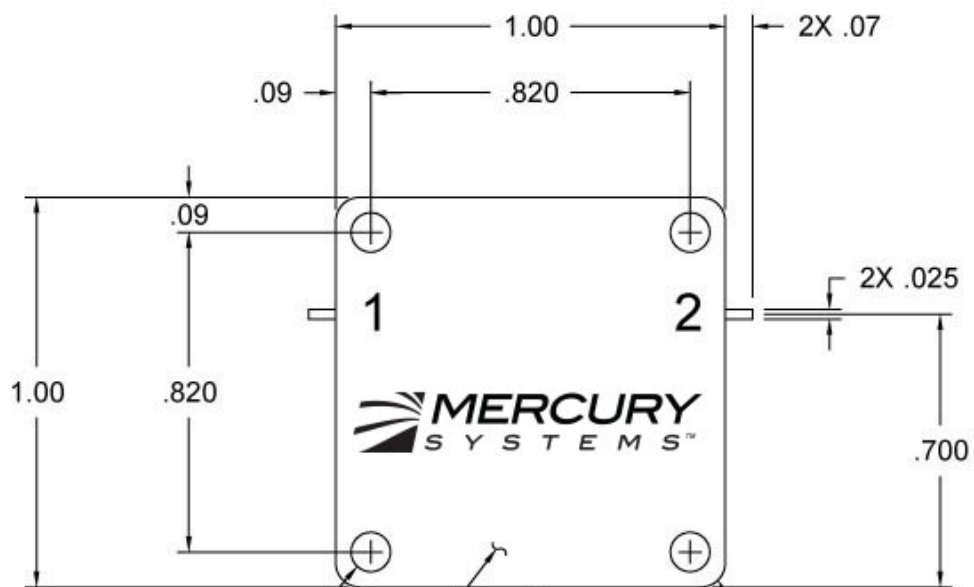

4X Ø.101 THRU

MARKING NEAR SIDE

4X R.062

FLUSH TERMINATION

2X TAB .005-.001 THK.  
BERYLLIUM COPPER  
SILVER PLATED  
(GOLD PLATED OPTIONAL)